




PAIR OF JACK STANDS

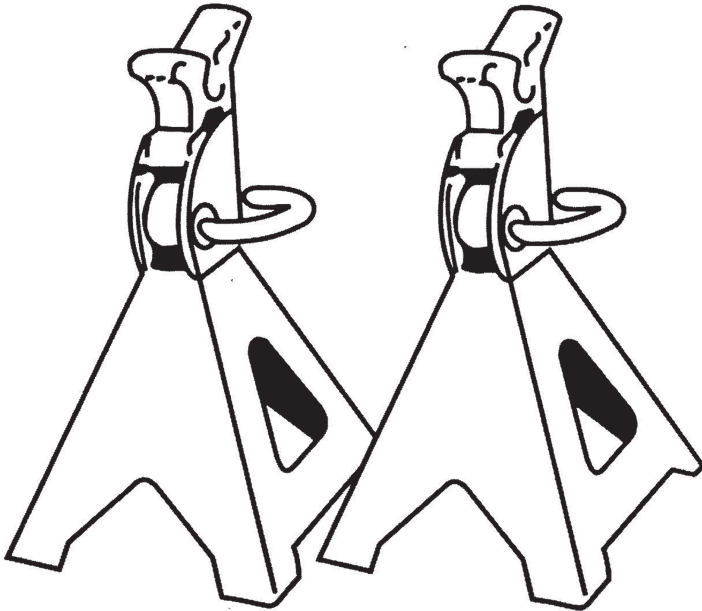

**Actual product may vary slightly*

Please carefully read and save these instructions before attempting to assemble, maintain, install, or operate this product. Observe all safety information to protect yourself and others. Failure to observe the instructions may result in property damage and/or personal injury. Please keep instructions for future reference.

For warranty purchases, please keep your dated proof of purchase. File or attach to the manual for safe keeping.

SPECIFICATIONS

Specifications are subject to change without notice.

MODEL	CAPACITY(TON)	MIN. HEIGHT	MAX. HEIGHT	BASE DIMENSION
38013	3	12-3/16"	16-3/4"	7-11/16X6-7/8"
38014	6	16-1/8"	23-5/8"	10-13/16X9-7/16"

IMPORTANT SAFETY INFORMATION

Read these safety warnings before operation.

WARNING!

Failure to read these warnings may result in loss of jack stands, personal injury damage.


WARNING!

Do not overload jack stands beyond rated capacity.
Overloading can cause damage to or failure of the jack stands.

POSITION LOAD ON CENTER OF SADDLE ONLY.
ALWAYS USING STANDS IN PAIRS ON HARD, LEVEL SURFACE CAPABLE OF SUST, AINING THE LOAD.
USING OF STANDS ON OTHER THAN HARD, LEVEL SURFACES CAN RESULT IN STANDS' INSTABILITY AND POSSIBLE LOSS OF LOAD.

OPERATAION

1. Refer to your vehicle owner's manual for proper jacking procedure lift only on areas of the vehicle as specified vehicle manufacture.
2. Position stands under vehicle at point specified by vehicle manufacture as proper load support points.
3. To adjust stands: Hold control lever up while lifting saddle shaft to desired height. Push control lever down to lock pawl into teeth located in center column. **MAKE SURE PAWL FULLY ENGAGED INTO TEETH.**
4. Carefully lower load onto stands.

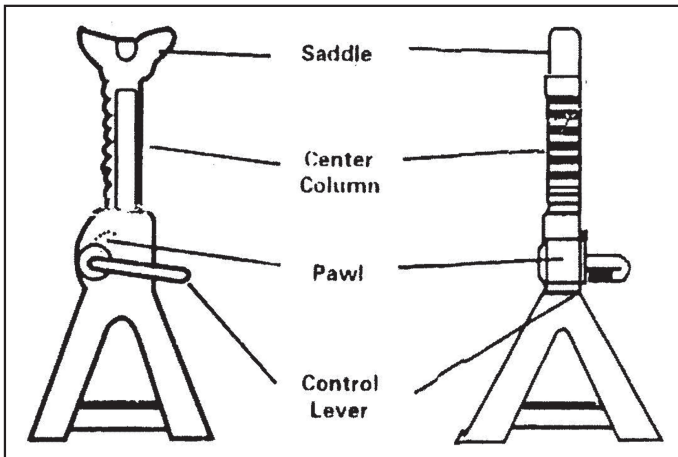

MAINTENACE & INSPECTION

1. Visual inspection shall be made before use of the stands, checking cracks, cracked weld and missing and/or damaged parts. And stand that appears to be damaged in any way shall be removed from service immediately.
2. BECAUSE OF THE POTENTIAL HAZARDS ASSOCIATE THE MISUSE OF EQUIPMENT OF THIS TYPE,NO REPLACEMENT SHALL BE MADE TO THE PRODUCT.

Limited Manufacturer Warranty

FOT makes every effort to ensure that this product meets high quality and durability standards. FOT warrants to the original retail consumer a 1-year limited warranty from the date the product was purchased at retail and each product is free from defects in materials. Warranty does not apply to defects due directly or indirectly to misuse, abuse, negligence or accidents, repairs or alterations, or a lack of maintenance. FOT shall in no event be liable for death, injuries to persons or property, or for incidental, special or consequential damages arising from the use of our products. To receive service under warranty, the original manufacturer part must be returned for examination by an authorized service center. Shipping and handling charges may apply. If a defect is found, FOT will either repair or replace the product at its discretion.

DO NOT RETURN TO STORE

For Customer Service:

Email: customerservice@focus-ontools.com or Call 1-800-348-5004