

VT2

LED Wet Location Linear Vaportite

Product Description

The VT2 LED Wet Location Linear Vaportite is designed to deliver the efficiency and crisp light quality of the latest LED technology and is suitable for both indoor and outdoor applications. This linkable fixture is available in 2' and 4' sizes and offers over 100 Lumens per watt. The VT2 is engineered with advanced diffusers which eliminate glare or hotspots providing a uniform distribution of light and can be surface mounted or suspended with aircraft cable. The IP66-rated fixture is designed to replace less-efficient fluorescent strip lights in car wash operations, airports, tunnels, maintenance areas, parking garages and stairwells.

Construction

Extruded aluminum with polycarbonate corrosion resistant covering withstand exposure to a variety of chemicals and weather

Optical System

Optically engineered to eliminate glare and LED hotspots using high efficiency frosted diffuser

Electrical

High efficacy: Greater than 100 lumens per watt using latest generation mid-power LED's
Linkable with end cap wiring knockouts (50 piece max on 2 foot, 21 piece max on 4 foot)

Operating temperature rating of -17°F to 110°F (-27°C to 43°C)

Universal input 120-277VAC

TM-21 Projected L70(9k) life >54,000 hours

LM-79, LM-80 testing performed in accordance with IESNA standards

Finish

Gloss white polycarbonate body

Installation

Surface mounting brackets included, suspended cable mounting kit available (sold separately)

Maximum length for daisy chain option is 50 for 2' fixture and 21 for 4' fixture

Warranty

5-year limited system warranty standard



Product Specifications

Model	VT2-10-2-UNV-50K-WH (2 foot)	VT2-10-4-UNV-50K-WH (4 foot)
LED Lifetime (Hrs)	>54,000	>54,000
Light Output (lm)	2201	4903
Power Draw (W)	21W	48W
Input Voltage (VAC)	120-277 V	120-277 V

Project

Catalog

Type

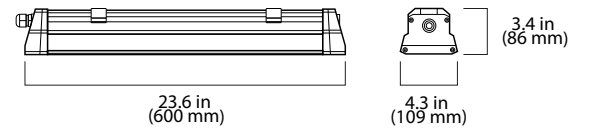

Ordering Information

Example: VT2-10-4-UNV-50K-WH


Series	Model	Length	Input	CCT	Housing Color
VT2	10	2 (2 foot)	UNV (120-277 V)	40K	WH (white)
		4 (4 foot)		50K	

Also available: VT2-CABLE, Aircraft cable for suspended mounting


Specifications and dimensions subject to change without notice.

Photometric Data - Type C Goniophotometer


VT2-10-2-UNV-40K-WH

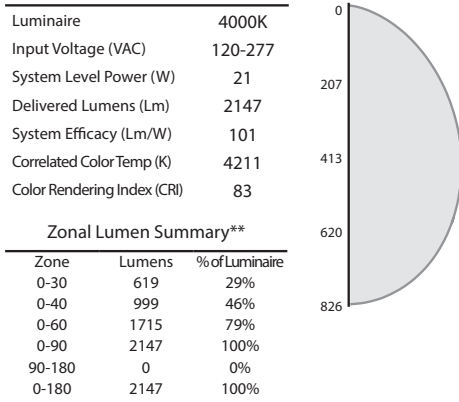

VT2-10-4-UNV-40K-WH

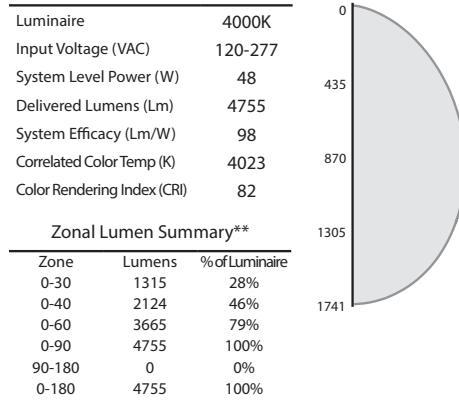

VT2-10-2-UNV-50K-WH

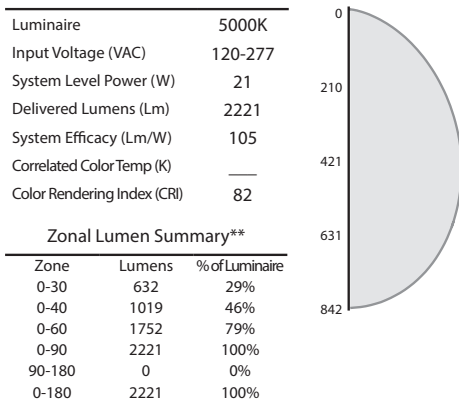

VT2-10-4-UNV-50K-WH

