





# Assembly and Installation Instructions

**CAUTION: USE EXTREME CARE WHEN WORKING ON OR NEAR ROOFLINE**


*Thank you for purchasing the Wedge Downspout Gutter Guard, the most economical Made In U.S.A. gutter guard solution.*



1. Fold the sides down; snap to bottom



2. Fold end down: snap sides and bottom. Prior to installation, remove all debris from your entire gutter and downspout system



3. Place the **Wedge** in the gutter with the oval ring in the downspout opening, point with sloped end facing the oncoming water.

*The Wedge fits into standard gutters with a minimum width of 2.7" (7 cm) with a 2" x 3" downspout opening.*

Videos and more info available:

***THEWEDGEGUTTERGUARD.COM***



**BACK TO BACK ASSEMBLY** (Optional) *For downspouts located away from the corners of a home or building*




1. Remove tabs on the side of the **Wedge**.



2. Insert tabs into holes on the back of the **Wedge**



3. Connect the two **Wedges** using the tabs from the first and insert into the second.

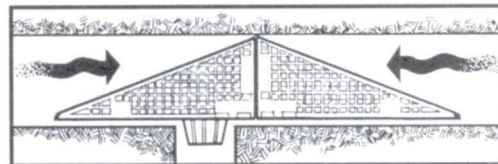

4. Remove the oval ring from one of the **Wedges**. Place the two **Wedges** in the gutter with **Wedge** with the oval ring still attached into the downspout.