


7

Features

Comparison Chart

Wash / Dry Features	Features	BM-1000P
	Wash	●
	Bidet	●
	Intensive	●
	Child	●
	Dry	●
Convenient / Comfortable Features	Normal/Powerful Energy Saving	●
	Oscillating / Pulsating	●
	Continuous Heated Water	●
	Heated Seat	●
	Soft Closing	●
	One Touch Release	●
Safety Features	Nozzle Cleaning	●
	Seat Sensor Overriding	●
	Low Burn Protection	●

Dimensions

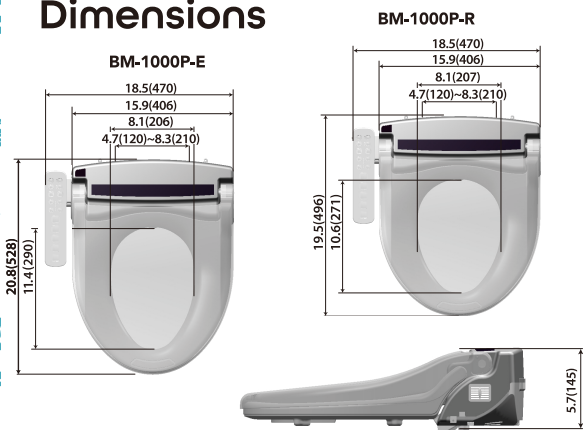

Specifications

Item			BM-1000P
Rated Voltage			AC 120V, 60Hz
Max. Power Consumption			870W
Power Cord Length			1.2m
Water Feed Method			Directly connected to water pipe
Recommended Water Inlet Pressure			99~106.6 psi
Wash	Feed Volume	Wash	0.13~0.21 gal/min
		Bidet	0.13~0.18 gal/min
		Power Wash	0.13~0.18 gal/min
		Child	0.13~0.16 gal/min
	Pressure Control		5 Levels
	Temperature Control		4 Levels (Off, Low, Middle, High)
	Heater Capacity		800 W
	Safety Device		Water Level Sensor, Thermal Fuse, Bi-Metal, Temperature Sensor
Heated Seat	Temperature Control		4 Levels (Off, Low, Middle, High)
	Heater Capacity		55W
	Safety Device		Thermal Fuse, Bi-metal
Dry	Temperature Control		Room temp. ~122°F
	Heater Capacity		250W
	Safety Device		Thermal Fuse, Bi-metal
Feed Water Temp. Tolerance Range			37 ~ 95°F (recommended 54 ~ 95°F)
Usage room temp. Tolerance range			37 ~ 104°F (recommended 50 ~ 95°F)
Dimension	BM-1000P-E		18.6" (472)x 20.8" (528) x 5.7" (145)
	BM-1000P-R		18.6" (472)x 19.5" (496) x 5.7" (145)
Weight Net Weight (Gross Weight)	BM-1000P-E		10.8lb (15.7)
	BM-1000P-R		10.4lb (15.4)