



## Specifications

### FEATURES

- Requires 3-Hole Sink with 8" On-Center
- 9/16"-24UNEF-2B Connections
- Max Flow Rate: 1.8 gpm (6.8 L/min) at 60 psi
- Max Countertop Thickness: 3 3/32"
- Spout Reach: 8 1/2"
- Spout Height: 25 7/32"
- Ceramic Valve for Lifetime Drip-free Operation
- With Zinc Lever Handle
- Recessed Rectifier

### CODE COMPLIANCE

- IAPMO Certified: ASME A112.18.1/CSA B125.1
- Compliant to NSF/ANSI 61 Section 9
- Compliant to NSF/ANSI 372
- Calgreen Certified
- Meets AB 1953 Lead Standard
- ADA Compliant






### WARRANTY

- Limited Lifetime Warranty

### 1200 Series Single-Handle Pull-Down Sprayer Kitchen Faucet

| MODEL        | SKU#    | FINISH          |
|--------------|---------|-----------------|
| 67556-0001   | 641-962 | Polished Chrome |
| 67556-0008D2 | 641-963 | Stainless Steel |

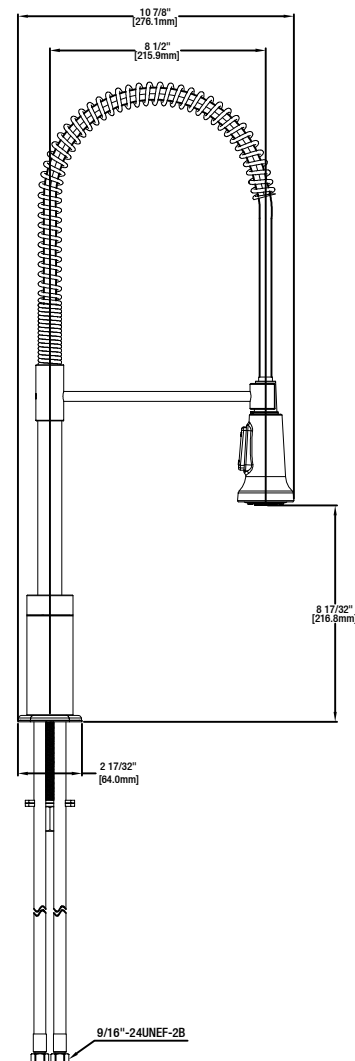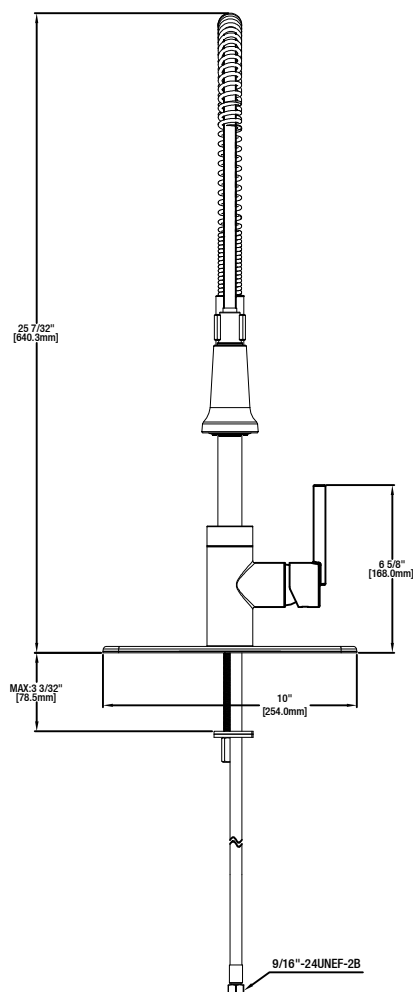

### INSTALLATION DIMENSIONS

Call 1-855-HD-GLACIER if you have any questions