

INSTRUCTIONS


⚠ DANGER!

Read these instructions carefully prior to installation.

- Check for electric, gas, and plumbing lines before drilling or consult a professional.
- **ALWAYS** cut **ALL** relevant power before installing a lighting fixture and do not restore power to the line until the lamp has been **FULLY** installed.
- **DO NOT** use with bulbs exceeding the recommended wattage.

ASSEMBLY

1. Prepare the wiring in your ceiling for the desired location of your new lamp. Prepare your junction box (not included).
2. Remove the canopy nuts (F) from the canopy bolts (C) and take the mounting bracket (B) off the canopy (E).
3. Connect the mounting bracket to your junction box using the mounting bolts (D).
4. Make electrical connections using the wire nuts (A).
5. Being careful that no wiring is left exposed, place the canopy against the mounting bracket and secure it by replacing the canopy nuts onto the canopy bolts.
6. Remove the shade bolts (G) from the support frame (H). Fit the shade (J) onto the frame and secure it by replacing these bolts.
7. Install your bulbs into the sockets on the lamp holder assembly (I). This fixture has been rated for three E26 bulbs (not included), each up to 60W and ST58.
8. Restore your power and enjoy!

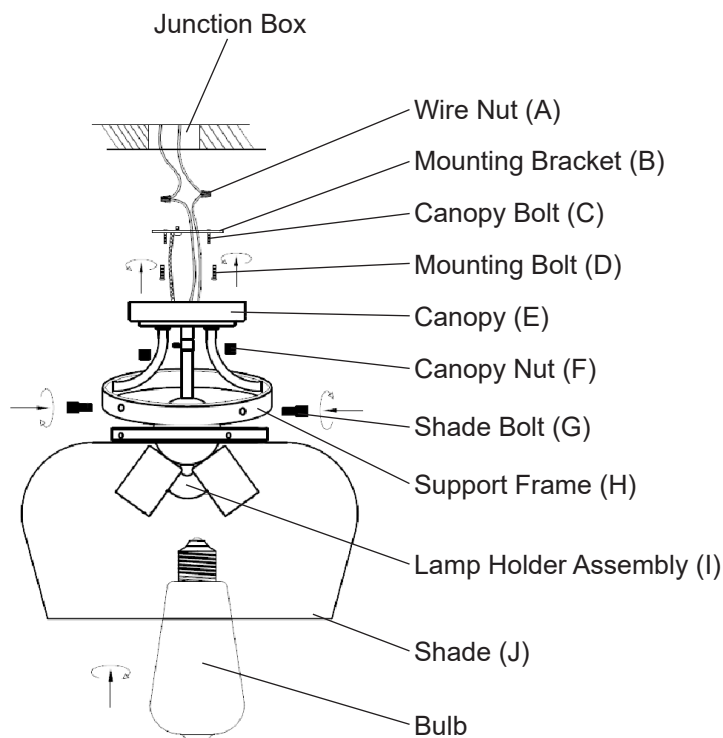

CONTACT US

Thank you for choosing our products! If you have any questions or comments, contact us at help@cs-supportpro.com and we'll resolve your issue ASAP!

For a .pdf copy of the latest version of these instructions, use the appropriate app on your smartphone to scan the QR code to the right.

