




ClearView  
GLASS RAILINGS

# INSTALLATION WITH TWO OR THREE SPIGOTS


## 2 SPIGOT INSTALLATION

Will Withstand Wind Gusts up to 115 MPH

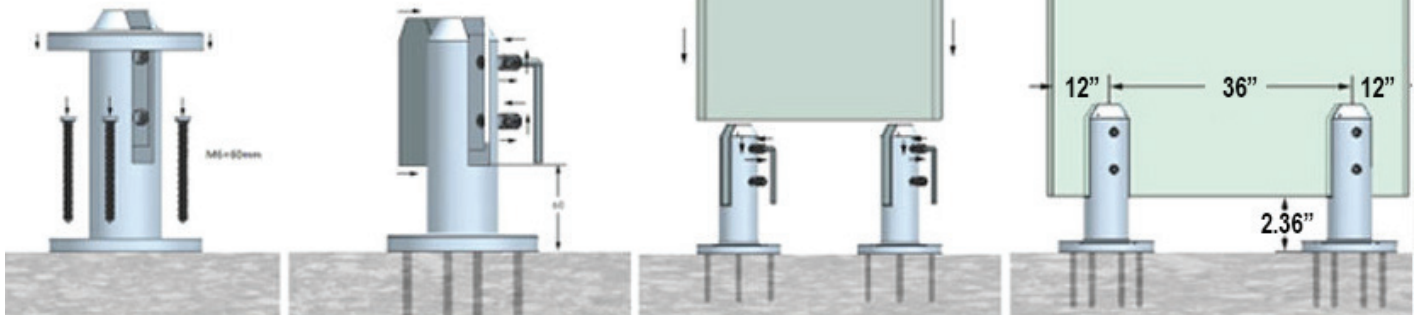

## 3 SPIGOT INSTALLATION


Will Withstand Hurricane Force Winds

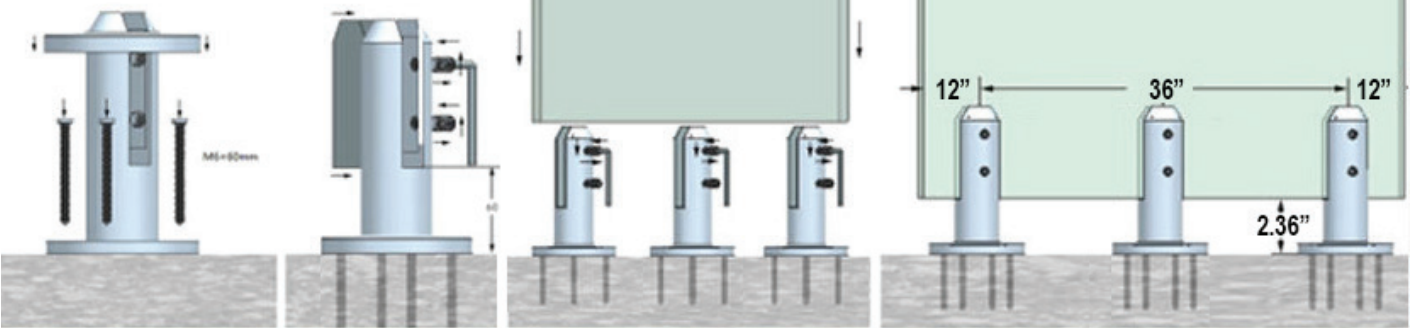

## Wood Deck Installation

The hold down force for each spigot is 2,500 lbs. We suggest using 3/8" diameter x 3.5" A354 structural bolts as they have sufficient capacity to resist this force. Use with flat washer to fasten spigots to wood deck. A354 structural bolts and washer should be cadmium plated or stainless steel so they do not rust. Lag bolts must be installed into rim joists or lam beam or properly blocked sub structure. If lag bolts are attached to deck planks only failure will occur as a result of improper installation. Improper installation and failure may result in injuries or death. Do it once and do it right!

> See specs on back side.

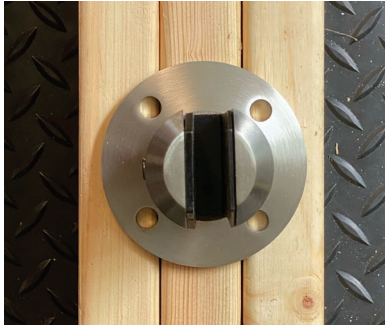

## Installation of Spigots Using Wood Planks

Installation of CVGR Spigots to wood planks are fine as long as you use three 2" x10"s. You must tie the three plies of wood together with (4) #8 4" wood screws, located 3" from spigot screws.

## Specifications



<b>Part Number</b>	CVGR 316 SSOD48-180 Satin Finish
<b>Product Name</b>	Round Deck Mount Spigot
<b>Spigot Size</b>	1.9" diameter x 7.1" tall
<b>Spigot Weight</b>	5.5 lbs.
<b>Glass Thickness/ Dimensions/Weight (per panel)</b>	1/2"/ 60" width x 39.37" height/105 lbs.
<b>Accessories Included</b>	Base Cover, Rubber Gasket

### VERY IMPORTANT

- Apply a bit of lubricant (petroleum jelly) to the inside of the spigot's black plastic boot where the boot meets the glass. The application of lubrication prevents the spigot's black plastic boot from grabbing the glass panel should you slide/move the glass to adjust its position while in the spigots.
- Do not attempt to slide the glass panel while it is in the spigot if there is no lubricant on the black plastic spigot boot as the glass panel may stick and fail.
- If no lubrication is applied to the spigot boot, you must lift the glass panel out of the spigot, adjust its position as desired and then lower the glass panel back into the spigot.

### Helpful Installation Tips

- Mark spigot location on glass panels with a crayon or wax marker. This allows for fast and easier installation of panel in proper location.
- Some clients have suggested screwing the rim joist to the joist as the screws will hold the rim joist tight to the joist where as nails may not.