Easy Pump Sprayer Application

No Back Brushing Required

Trusted Since 1938

OLYMPIC® WATERGUARD®

CLEAR WOOD SEALER

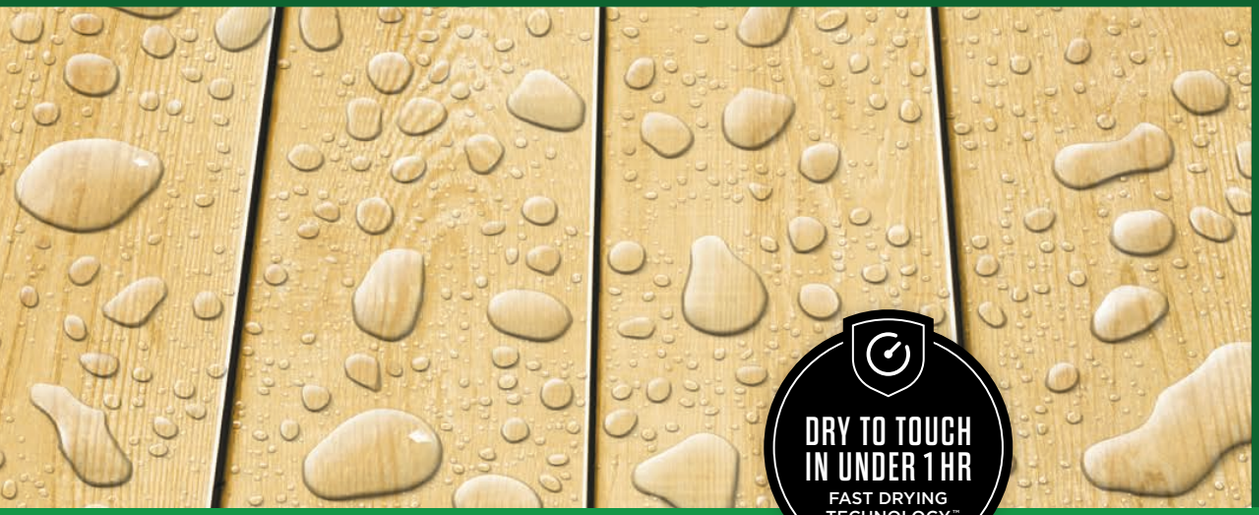

- Crystal Clear One-Coat Formula
- Helps Prevent Water Damage
- Excellent UV Protection
- Provides a Mildew Resistant Coating
- Easy Soap and Water Cleanup

SATISFACTION GUARANTEED*

SAP Code: 00485429

8 40362 38827 5

1343322

55270XI

FIVE GALLONS/18.9 L

OLYMPIC® WATERGUARD® Clear Wood Sealer

OLYMPIC® WATERGUARD® Clear Finish protects wood while allowing it to weather and gray naturally.

WHERE TO USE: FOR WOOD SUBSTRATES ONLY. Recommended for use on properly prepared, exterior wood, including decks, fences, siding, railings, outdoor furniture, and other wood surfaces. Apply to new, dry, pressure-treated wood, uncoated new or weathered wood, or previously coated wood with a weathered, clear sealant or semi-transparent stain. Not recommended for painted or recently stained surfaces. **FOR EXTERIOR USE ONLY.**

COVERAGE: One-coat application is recommended. Coverage will vary due to porosity of surface and application technique. One gallon (3.78 L) will normally cover 250 to 350 sq. ft. (23 to 33 sq. meters).

SURFACE PREPARATION: Proper surface preparation is essential for the *Olympic* limited warranty to apply. Surface must be clean. Remove all dust, dirt, mildew, oil, loose wood fibers, and other contaminants. Previous coatings must be completely removed. To ensure proper penetration, weathered, dirty, or mildewed surfaces should be cleaned with a wood cleaner prior to applying. After rinsing, ensure surface is free of standing water. Remove grade stamps or pencil marks by sanding.

WARNING! If you scrape, sand, or remove old paint, you may release lead dust or fumes. LEAD IS TOXIC. EXPOSURE TO LEAD DUST OR FUMES CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE. Wear a properly fitted, NIOSH-approved respirator and prevent skin contact to control lead exposure. Clean up carefully with a HEPA vacuum and a wet mop. Before you start, find out how to protect yourself and your family by contacting the USEPA National Lead Information Hotline at 1-800-424-LEAD or log on to www.epa.gov/lead. Follow these instructions to control exposure to other hazardous substances that may be released during surface preparation.

PRETEST: Apply on a small area before treating the entire surface. If the product is not absorbed into the surface, the surface is not suitable for this product.

APPLICATION: Apply when no precipitation is expected for 24 hours, and when air and surface temperatures are 35°F (2°C) to 90°F (32°C) and will remain above 35°F (2°C) for the next 24 hours. Avoid applying in direct sunlight or on hot surfaces. DO NOT THIN OR MIX WITH ANY OTHER COATING, PAINT, OR STAIN PRODUCTS. Stir thoroughly and often during use. Application by low-pressure, garden-type sprayer is recommended. May be applied by brush, paint/stain pad, or with paint-type sprayer. Coat vertical surfaces starting at the top and working down. Do not saturate or puddle on horizontal surfaces.

DRYING: Normally dries to touch in under one hour when applied in optimal temperatures of 50°F (10°C) to 85°F (29°C). Application in high humidity or in temperatures below 50°F (10°C) may prolong drying times. Allow 24 to 48 hours of drying time before light foot traffic or replacing furniture.

CLEANUP: Clean brushes and tools with warm, soapy water.

DISPOSAL: Contact your local environmental agency for guidance on disposal of unused product. Do not pour down a drain or storm sewer.

PROTECT FROM FREEZING. U-3310-22

PRECAUTIONS AND FIRST AID: Provide fresh air ventilation during and after application and drying. Avoid the inhalation of dust, particulates, spray or mist arising from the application of this preparation. Use personal protective equipment as required. **FIRST AID:** If swallowed, rinse mouth with water (only if the person is conscious). Do not induce vomiting unless directed to do so by medical personnel. If in eyes, rinse with water for 15 minutes. Check for and remove any contact lenses. If on skin, rinse well with water. Wash with soap and water. Get medical attention if irritation develops. If inhaled, remove to fresh air. If experiencing respiratory symptoms call a POISON CENTER or doctor/physician. CONTAINS: water (7732-18-5), Siloxanes and Silicones, di-Me, hydroxy-terminated (70131-67-8), proprietary silicone resin (Not available), proprietary polysiloxane + functional groups (Not available), Silicone/siloxane residuals (Not available). Contains isothiazolinones. May cause allergic reaction. Keep out of the reach of children. SDS, spill, and emergency information are available by calling 1-833-477-1553.

El acabado transparente OLYMPIC® WATERGUARD® protege la madera, a la vez que permite que se desgaste y torne gris de forma natural.

DÓNDE USAR: PARA SUSTRATOS DE MADERA ÚNICAMENTE. Recomendado para uso en maderas exteriores debidamente preparadas, incluyendo terrazas, cercas, revestimientos de paredes, barandas, muebles para exteriores y otras superficies de madera. Aplíquelo a madera nueva, seca, madera tratada a presión, madera nueva sin recubrir o desgastada o madera previamente revestida con un sellador transparente o un tinte semitransparente desgastados. No se recomienda para superficies pintadas o entintadas recientemente. **PARA USO EN EXTERIORES SOLAMENTE.**

RENDIMIENTO: Se recomienda la aplicación de una sola capa. La cobertura variará según la porosidad de la superficie y la técnica de aplicación. Cada 3.78 litros (un galón de EE.UU.) normalmente cubre de 23 a 33 m^2 (250 a 350 $pies^2$).

PREPARACIÓN DE LA SUPERFICIE: Es fundamental preparar adecuadamente la superficie para que la garantía limitada de *Olympic* aplique. La superficie debe estar limpia y seca. Elimine todo el polvo, suciedad, moho, aceite, fibras de madera sueltas y otros contaminantes. Los recubrimientos anteriores deben removerse completamente. Para garantizar una penetración apropiada, antes de aplicar el tinte se debe aplicar un limpiador de madera en las superficies afectadas por la intemperie, sucias o con moho. Después de enjuagar, cerciórese que no haya agua estancada en la superficie. Lije la madera para eliminar los sellos de clasificación de la madera o las marcas de lápiz.

¡ADVERTENCIA! Si raspa, lija o elimina pintura vieja, puede generar polvo o vapores de plomo. EL PLOMO ES TÓXICO. LA EXPOSICIÓN AL POLVO O A LOS VAPORES DE PLOMO PUEDE CAUSAR ENFERMEDADES GRAVES, COMO DAÑOS CEREBRALES, ESPECIALMENTE EN LOS NIÑOS. LAS MUJERES EMBARAZADAS TAMBIÉN DEBEN EVITAR LA EXPOSICIÓN. Para controlar la exposición al plomo, use un respirador aprobado por NIOSH debidamente ajustado y evite el contacto con la piel. Limpie cuidadosamente con una aspiradora con filtro HEPA o un trapeador húmedo. Antes de comenzar, averigüe cómo puede protegerse usted y cómo proteger a su familia poniéndose en contacto con la Línea Nacional Directa de Información sobre el Plomo de la Agencia de Protección al Medio Ambiente (EPA) en EE.UU. llamando al 1-800-424-LEAD o visite www.epa.gov/lead. Siga estas instrucciones para controlar la exposición a otras sustancias peligrosas que se puedan generar durante la preparación de las superficies.

PRUEBA PREVIA: Aplique en un área pequeña antes de tratar toda la superficie. Si el producto no es absorbido por la superficie, la superficie no es adecuada para este producto.

APLICACIÓN: Aplíquelo cuando no haya pronóstico de lluvia durante 24 horas, y cuando las temperaturas del aire y la superficie sean de 2°C (35°F) a 32°C (90°F) y permanecerán por encima de 2°C (35°F) durante las próximas 24 horas. Evite aplicar bajo la luz solar directa o sobre superficies calientes. NO DILUYA NI MEZCLE CON NINGÚN OTRO RECUBRIMIENTO, PINTURA O PRODUCTOS DE TINTE. Mezcle cuidadosamente y frecuentemente durante su uso. Se recomienda aplicar con un pulverizador de jardín de baja presión. Puede aplicarse con brocha, almohadilla para pintura/tinte o con un pulverizador de pintura. Cubra las superficies verticales comenzando desde arriba hacia abajo. No sature ni forme charcos en las superficies horizontales.

SECADO: Normalmente se seca al tacto en menos de una hora cuando se aplica a temperaturas de 10°C (50°F) a 29°C (85°F). La aplicación del producto en condiciones de humedad elevada o a temperaturas debajo de 10°C (50°F) puede hacer que el tiempo de secado sea mayor. Permita que seque durante 24 a 48 horas antes de usar en áreas de tráfico peatonal ligero o antes de antes de colocar muebles.

LIMPIEZA: Limpie las brochas y herramientas con agua jabonosa tibia.

ELIMINACIÓN: Para recibir orientación sobre la eliminación del producto no usado, comuníquese con la agencia medioambiental local. No lo vierta en el drenaje ni en alcantarillas de aguas pluviales.

EVITE QUE SE CONGELE. U-3310-22

PRECAUCIONES Y PRIMEROS AUXILIOS: Proporcionar ventilación con aire fresco durante y después de la aplicación y el secado. Evite la inhalación de polvo, partículas, aerosoles o nieblas resultantes de la aplicación de esta preparación. Utilice equipo de protección personal cuando sea necesario. **PRIMEROS AUXILIOS:** Si se ingiere, enjuague la boca con agua (solamente si la persona está consciente). No inducir al vómito a menos que lo indique expresamente el personal médico. Si el contacto es en los ojos, enjuague con agua abundante durante 15 minutos. Verificar si la víctima lleva lentes de contacto y en este caso, retirárselas. Si el producto cae en la piel, enjuagarla bien con agua. Lavar con agua y jabón. Obtenga atención médica si se desarrolla irritación. Si es inhalado, trasladar al afectado al aire libre. En caso de síntomas respiratorios: Llamar a un CENTRO DE TOXICOLOGÍA o a un médico. CONTIENE: agua (7732-18-5), Polisiloxanos, di-me, hidroxi- terminados (70131-67-8), resina de silicón patentada (No disponible), polisiloxano patentado + grupos funcionales (No disponible), residuos de silicona/siloxano (No disponible). Contiene isotiazolinonas. Puede provocar una reacción alérgica. Manténgase fuera del alcance de los niños. Información sobre la ficha de datos de seguridad, derrames e emergencias están disponibles llamando al 1-833-477-1553.

***SATISFACTION GUARANTEED**
LIMITED LIFETIME WARRANTY

Backed by a tradition of quality, The Pittsburgh Paints Co. guarantees your complete satisfaction with the performance of this product when applied to a properly prepared surface in accordance with label directions. THE PITTSBURGH PAINTS CO. MAKES NO OTHER EXPRESS WARRANTIES. FOR AS LONG AS YOU OWN YOUR SINGLE-FAMILY HOME, IF THE PRODUCT FAILS TO CONFORM TO THIS LIMITED WARRANTY, THE PITTSBURGH PAINTS CO. WILL, AT YOUR OPTION, FURNISH REPLACEMENT PRODUCT OR REFUND THE PURCHASE PRICE. THIS LIMITED WARRANTY EXCLUDES (1) LABOR OR COSTS OF LABOR FOR THE APPLICATION OR REMOVAL OF ANY PRODUCT AND (2) ALL OTHER DIRECT, INDIRECT, INCIDENTAL, SPECIAL, OR CONSEQUENTIAL DAMAGES. This Limited Warranty gives you specific legal rights; you may have other rights which vary by state. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above exclusion or limitation may not apply to you. To make a claim under this Limited Warranty, supply dated proof of purchase to the store of purchase or to The Pittsburgh Paints Co., 400 Bertha Lamme Drive, Cranberry Township, PA 16066.

Visit our website at www.olympic.com

55270XI

SAP Code: 00485429

Calc. VOC < 100 g/L (0.8 lbs/gal)

8 40362 38827 5

(29025) 1343323

Manufactured by: The Pittsburgh Paints Co.
400 Bertha Lamme Drive,
Cranberry Township, PA 16066

© 2025 The Pittsburgh Paints Co. All Rights Reserved. *Olympic*, *Olympic and Design*, *Paintbrush Design*, and *WaterGuard* are registered trademarks and *Fast Drying Technology* is a trademark of The Pittsburgh Paints Co.