

ASSEMBLY INSTRUCTIONS

MODEL# PND-2073

NOTE: Only the technical personnel can be allow to fix and maintain.
IMPORTANT!

Take all lamp parts out of the package and lay them on a flat surface.

FIXING INSTRUCTIONS

1. Unscrew canopy nuts (F) from the canopy (G) and detach mounting bracket (AA). Attach mounting bracket (AA) to the junction box (not included) with junction box screws (BB).
2. Detach the glass shade (A) from metal shade (C).
3. Thread tube (D) and (E) onto metal shade (C), assemble them by screwing them together.
4. Assemble the canopy (G) onto the tube (E).

NOTE : All stems can be use alone or in combination to determine the look and the height needed.



5. Wrap the bare copper grounding wire from the fixture around the green screw on the mounting bracket (AA), then connect it to the grounding conductor of the supply circuit. Use U.L./C.S.A. listed wire connectors (CC) suitable for he size, type and number of conductors. Secure the wire connectors (CC) with U.L./C.S.A. listed electrical tape.
6. Place the canopy (G) against the mounting surface, allowing the preassembled screws on mounting bracket (AA) to pass through the canopy (G). Secure with previously removed canopy nuts (F).
7. Use only with maximum of 60 Watt E26 type A bulbs (B) (not included).
8. Screw the glass shade (A) onto the metal galass (C) until secure.

CLEANING CARE

Clean with a soft dry cloth.

SAFETY INFORMATION

Do not touch the bulb with bare hands. Always switch off the electricity supply and allow to cool for 10 minutes before changing the light bulbs.

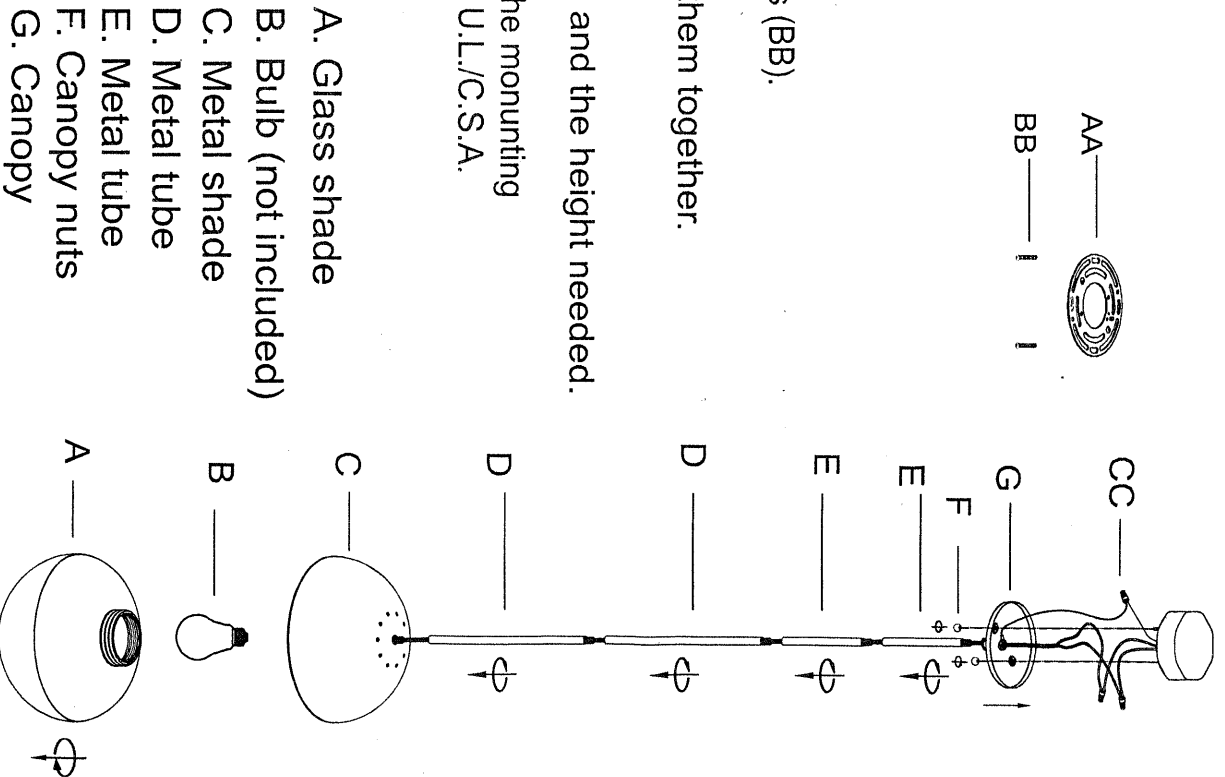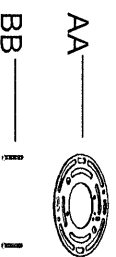

- A. Glass shade
- B. Bulb (not included)
- C. Metal shade
- D. Metal tube
- E. Metal tube
- F. Canopy nuts
- G. Canopy
- AA. Mounting bracket
- BB. Junction box screws
- CC. Wire connectors