


# 7.5 in Low Profile Flush Mount with Night Light




C01228301A / C01228302A / C01228303A  
SKU# 1009385335 / 1014582422 / 1014582393

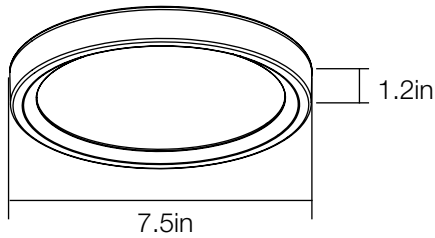

### ADVANTAGES

- 50,000 Hours of Continuous Use
- Replaces (1) 60 Watt Bulb
- 80 CRI for High Quality Color Rendering
- Adjust Night Light (Amber 2000K) with Your Wall Switch
- Night Light Mode with 140 lumens (4.8 Watt)
- Oil Rubbed Bronze/ Matte Gold/ Brushed Nickel Interchangeable Trim Included
- Adjust Color of Light with Integrated Switch-Warm White (2700K), Soft White (3000K), Neutral White (3500K), Bright White (4000K), Daylight (5000K)



### DIMMER LIST

| Dimmer Brand        | Model #        |
|---------------------|----------------|
| Lutron              | DVCL-153PR     |
|                     | MACL-153MLH-WH |
|                     | P-PKG1W-WH-R   |
|                     | STCL-153MH-WH  |
| Leviton             | R11-DSL06-1TW  |
|                     | R00-RNL06-0TW  |
|                     | R02-D26HD-1RW  |
|                     | R68-06674-P0T  |
| Legrand             | RHCL453PNICCV4 |
| TP-link             | HS220          |
| Commercial Electric | HPDA311CWB     |

### SURFACE MOUNT



| SPECIFICATIONS         | WHITE OR OIL RUBBED BRONZE                    | MATTE BLACK OR MATTE GOLD | WHITE OR BRUSHED NICKEL |
|------------------------|---|---------------------------|-------------------------|
| Model Number           | C01228301A                                    | C01228302A                | C01228303A              |
| SKU                    | 1009385335                                    | 1014582422                | 1014582393              |
| OSMID                  | 336168242                                     | 336168246                 | 336168225               |
| Power                  | 12W   |                           |                         |
| AC Voltage, Frequency  | 120V, 60 Hz                                   |                           |                         |
| Color Temp (nom.)      | 2700K / 3000K / 3500K / 4000K / 5000K & 2000K |                           |                         |
| Operation Temp         | -4°F ~ 113°F                                  |                           |                         |
| CRI                    | 80  |                           |                         |
| Lumen Output (min.)    | 840 lm  |                           |                         |
| Dimming                | YES   |                           |                         |
| Lifetime Rating        | L70/50000Hrs                                  |                           |                         |
| Efficacy (Main light)  | 70 lm/watt                                    |                           |                         |
| Efficacy (Night light) | 28.87 lm/watt                                 |                           |                         |

### PACKAGING

|                            |                       |
|----------------------------|-----------------------|
| Weight (±0.5 lb)           | 1.1 lbs               |
| Size (L x W x H) (±0.1 in) | 7.5in x 7.5in x 1.2in |
| Box Dimensions             | 8.5in x 2.4in x 8.6in |
| Gross Weight               | 1.4 lbs               |
| UPC ( C01228301A )         | 849489081465          |
| UPC ( C01228302A )         | 849489081304          |
| UPC ( C01228303A )         | 849489081311          |



### INCLUDED IN BOX

- Mounting Bracket (1)
- Mounting Screw (2)
- Wire Connector (2)
- Trim (1)

### APPLICATIONS

Suitable for Damp Locations