


WESTBRASS


Fine Decorative Plumbing Since 1935

ASME A112.18.1 / CSA B125.1

YOU MAY NEED: USTED PUEDE NECESITAR:




Screwdriver
El destornillador




Tape measure
Cinta métrica



Silicone Sealant: Use Silicone sealant under base of strainer.
Sellador de silicón: Si el lavamanos está desnivelado use sellador de silicón debajo de la base del borde.



Pliers: For removal and installation.
Alicates: Para quitar y instalación.




Hacksaw
Sierra

Cable Driven Bath Waste and Overflow


Impulsado por Cable Residuos del Baño

D50P27TLE or D50P35TLE

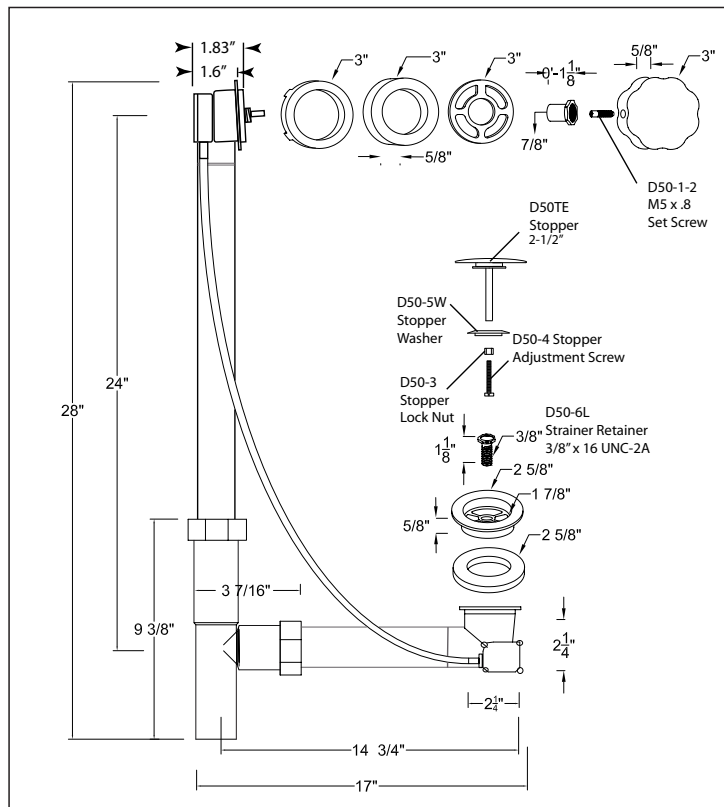

Installation Instructions:

1. Measure and dry fit all connections. Use Hacksaw to cut tubes as required.
2. Use washer to match top elbow to tub.
3. Tighten Slip joint nuts and ferrules to seal tubing.
4. Place rubber gasket on overflow elbow and seal with silicone.
5. Place a thin bead of silicone seal on bottom of strainer.

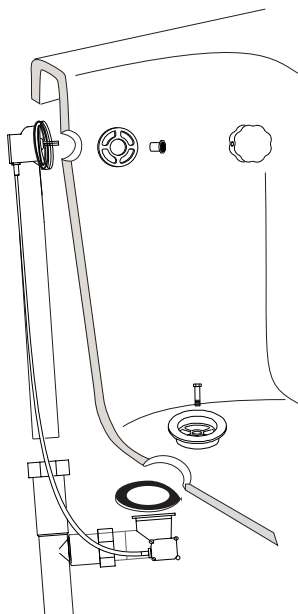

Instrucciones de Instalación

1. Medir y en forma seca todas las conexiones. Uso la sierra para cortar tubos según sea necesario.
2. Utilice lavadora para que coincida con la parte superior del codo de la bañera.
3. Apretar las tuercas deslizantes conjuntos y férulas para sellar la tubería.
4. Coloque la junta de goma en el codo del rebosadero y sellar con silicona.


6. Screw in strainer to shoe elbow using bolt.

7. Wipe off any excess silicone with a clean towel then place in the stopper.

8. Securely fasten overflow retainer into top elbow with nut.


9. Place handle over tub fitting and screw in handle. Use a credit card to space handle from tub to prevent marring tub finish.

10. Check for leaks.

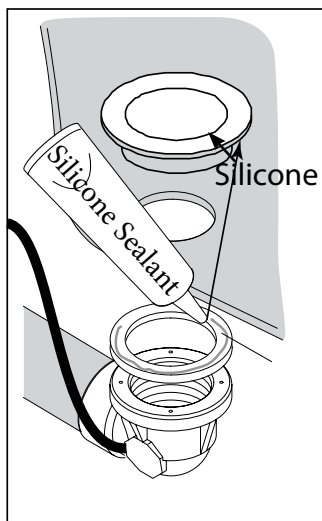

Silicone seal locations

Lugares de sellado de silicona

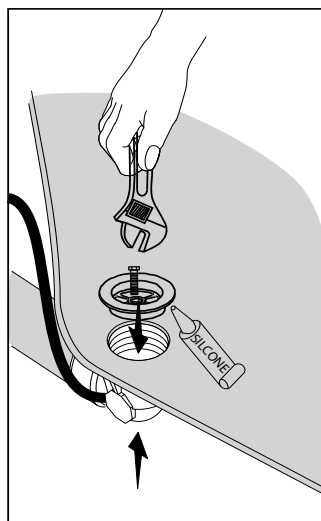

Tighten using Pliers or wrench

Apriete utilizando alicates o una llave de inglesa

5. Coloque una tira fina de junta de silicona en la parte inferior del colador.

6. Tornillo en colador para el codo de zapatos usando un perno.

7. Limpie el exceso de silicona con una toalla limpia y echarlo en el tapón.

8. Sujete fuertemente retenedor de desbordamiento en la parte superior del codo con la tuerca.

9. Coloque la manija sobre el montaje bañera y el tornillo en el mango. Utilice una tarjeta de crédito junto con el mango espacio de la tina para evitar estropear el acabado bañera.

10. Compruebe si hay fugas.

CARE & MAINTENANCE

With the exception of living finishes, all Westbrass decorative finishes are protected by the strongest finish treatments available while maintaining their luxurious appearance. While some finishes are more durable than others, no finish is indestructible. Polished Chrome, Satin Nickel and PVD Polished Brass finishes are the most durable. All other finishes are electroplated; some are then coated to enhance the gloss and durability.

TO CLEAN:

Do not allow your product to come into contact with any cleansers fortified with ammonia, bleach, grease-cutters or other surfactant chemicals. Soft Scrub, Dawn Liquid Soap, Palmolive or any other combined cleaners contain certain chemical components that will dissolve and remove the finish's protective coating, and eventually the finish itself. Use only plain warm water and mild soap on a soft cloth or sponge. Avoid using any sponge with a scouring pad to clean your product. It is not necessary to rub hard to remove spots.

TO PROTECT:

An occasional application of Carnuba wax (without cleaners), like that found in Flitz Faucet Wax, Turtle Wax for Clear Coat Car Finishes or McGuire's Premium Wax, will enhance the finish lustre, reduce hard water spots and add an extra layer of protection to your finish.

WARRANTY

Finishes:

All sink and tub/shower drains, strainers and other trims have a 1 year warranty

Functional Warranty:

The functionality of all products is warranted for a period of one year. Ceramic disc valves on any water delivery merchandise are warranted for one year. Warranties are guaranteed to the original purchaser only. Product problems attributable to abuse, misuse, improper installation, hard water, neglected maintenance or accidental damage are not covered by this warranty. Modifying the product in any way voids the warranty. The use of plumber's putty on our products also voids the warranty. Silicone

sealing compounds should be used instead. No repairs or replacements will be made under such circumstances except at customer's expense. Liability under warranties expressed or implied is limited to repair or replacement of defective goods only. In no event will Westbrass be liable for incidental or consequential damages (such as labor charges). This warranty does not cover labor charges, whether based on breach of express or implied warranty, breach of contract, negligence or any other legal theory.