

ASSEMBLY INSTRUCTIONS

MODELS: HCF-2801

CAUTION! To avoid the risk of shock or fire ,this fixture should only be installed by a licensed electrician.

IMPORTANT!

Before proceeding with the installation,make sure that the power is switched off at the main circuit breaker panel.

INSTALLATION INSTRUCTIONS-

1. Secure mounting bracket(G)to junction box using mounting screws(H)
2. connect the black neutral wire (D) from the fixture to the black live wire (A)in the junction box using wire nut(F).
3. Wrap the copper ground wire(E)from the fixture around the green ground screw and securely tighten the screw
4. To attach the fixture(N)to the junction box, align the screws that are attached to the mounting bracket with the holes in and secure with threaded ball nuts(I)
5. Install the glass shades(K) ONTO THE SPCLTS(J) and secure with additional socket rings(L) and then socket rings (L)
6. Install lighting bulbs(N) (not included).

CAUTION!


Uses 60 Watt maximum of each Type A bulbs of LED equivalent.

CLEANING CARE

Clean with a soft dry cloth .

SAFETY INFORMATION

lighted Bulbs are Hot .Always turn off the power supply and allow to cool for 10 minutes before changing the lighting bulbs.

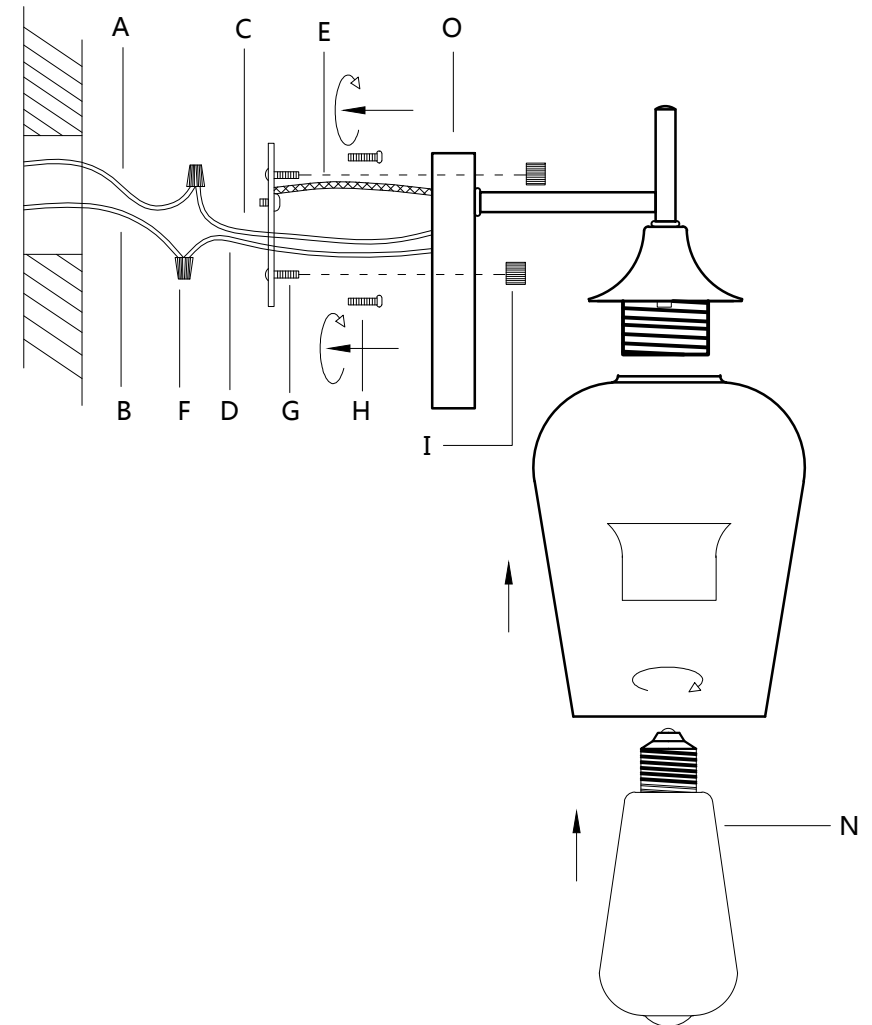

A. Black live wire
C. White neutral
E. Ground wire
G. Mounting bracket
I. Glass shade
K. Glas shade
M. Socket rign
O. Back plate

B. White live wire
D. Black neutral wire
F. Wire nut
H. Mounting screw
J. spclt
L. Additional socket ring
N. Bulbs(not included)