


| | | | | | |
|-------------|--|-----------|--|------|--|
| Project | | Catalog # | | Type | |
| Prepared by | | Notes | | Date | |

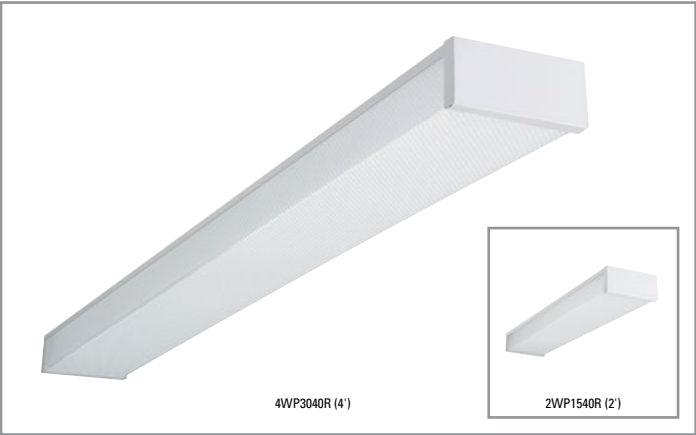

Metalux

WP

2' and 4' LED UNV Utility Wrap Light

Typical Applications

- Commercial • Educational • Residential • Corridor • Stairway
- Multi-Use or Utility Application

Interactive Menu

- Order Information page 2
- Product Warranty

Product Certification



Product Features



Top Product Features

- Ideal for replacing two or three lamp fluorescent wraparounds (up to 96W equivalent)
- Prismatic LED blend acrylic lens for general light coverage
- Efficacy up to 115 lm/W saves up to 40% over fluorescent wraps
- Low-profile, post-painted die formed channel
- Energy-Star compliant

Features and Benefits

| | Feature | Benefit |
|--------------|--|--|
| Performance | Up to 115 lm/W, L70 at 50,000 rated life hours | Save over 40% energy over existing LFL strips |
| | Energy Star certification | Eligible for energy rebate |
| | 5-Year Warranty | Certified and guaranteed performance, trusted brand name |
| | Meets NEC Section 410.16 code | Permitted for use in closet or small storage spaces |
| Construction | Full length, standard width post painted steel channel | No painting required. Ideal for LFL retrofit |
| | Prismatic Acrylic Lens Optic | One for one replacement of 2-lamp LFL wraparounds |
| | Surface or chain mount capability | Design flexibility / simplified installation |

Product Information

| Catalog Number | UPC | CCT (K) | CRI (Min) | Delivered Lumens | Watts | Efficacy (lm/W) | Controls | Input current (A) | |
|----------------|--------------|---------|-----------|------------------|-------|-----------------|-------------|-------------------|------|
| | | | | | | | | 120V | 277V |
| 2WP1540R | 080083847181 | 4000 | 80 | 1820 | 16.5 | 110 | Non-Dimming | 0.13 | 0.06 |
| 4WP3040R | 080083847167 | 4000 | 80 | 4010 | 34.5 | 115 | Non-Dimming | 0.28 | 0.12 |

Accessories

| Accessories (Order Separately) |
|---|
| HBAYC-CHAIN/SET/U=(2) V-Hook Hangers, 36" Chain Sets w/S-Hooks ⁽¹⁾ BKYT18-063-120K=Y Toggle No. 2 at 10 ft. long ⁽¹⁾ |
| Notes |
| (1) Separate junction box (by others) required for power on all suspended options. |

Energy and Performance Data

Load Data

| | 2' | 4' |
|----------------|-----------|-----------|
| PF | 0.99 | 0.99 |
| THD% | < 10 | < 10 |
| Weight | 2.62 lbs. | 4.62 lbs. |
| Low Temp Start | -20C | -20C |

Shipping Data

| Catalog Base | Wt. | Units per Pallet |
|--------------|-----------|------------------|
| 2WP | 2.62 lbs. | 240 |
| 4WP | 4.62 lbs. | 120 |

Product Specifications

Construction

- Die formed post painted white steel housing and end plates
- Available sizes: 2ft and 4ft
- Impact resistant, UV-stabilized acrylic prismatic lens
- Tool-less lens retention design for easy maintenance

Electrical

- 120-277V Class B non-dimming driver
- L70 at 50,000 rated life-hours (TM-21), or greater than 24 years at 6 hrs/day
- LEDs are 4000K CCT and 80 CRI minimum

Shielding

- Classic wrap-around rectangular lens profile
- Standard LED blended prismatic for wide area coverage and even illumination
- See acrylic cleaning and limitations on use

Installation

- Surface (wall or ceiling) mount capable via junction box
- Suspension mount capable using standard V-hook or Y-toggle mounting kits
- Quick-access J-box plate allows for fast install and inspection
- Rated for installs in closet storage areas, as defined in NEC section 410.16

Compliance

- UL/cUL listed for damp location
- Rated for 0F (-20C) to 104F (40C) ambient operating temperatures
- RoHS compliant
- Suitable for use in closet storage spaces when installed in accordance with NFPA-70 and NEC 410.16 spacing requirements
- LED complies with IESNA LM-79 and LM-80
- ENERGY STAR® Certified luminaire - consult ENERGY STAR® Certified Product List

Warranty

- Five year warranty

Dimensional and Mounting Details

