
ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0278 / C0279

ARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements. 2. READ AND SAVE THIS INSTRUCTIONS.

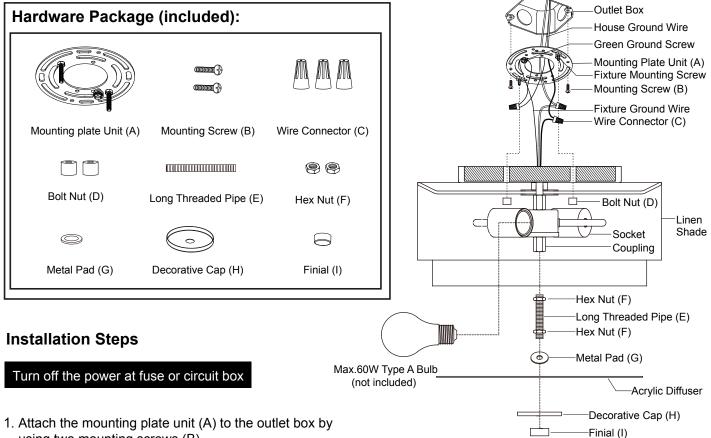

using two mounting screws (B).

2. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows: ---Connect the hot wire (black insulation) from the power source to the black wire from the fixture.

- ---Connect the neutral wire (white insulation) from the power source to the white wire from the fixture.
- ---Attach the fixture ground wire (bare wire) to the mounting plate with the green ground screw, or connect to the source ground wire if available. Carefully put the wires back into the outlet box.
- 3. Attach the fixture onto the mounting strap unit (A) and tighten it with two bolt nuts (D).
- 4. Install 2 x 60W Max. medium base bulbs (not included). See relamping label at socket area or packaging for maximum wattage allowed.
- 5. Attach the long threaded pipe (E) to coupling, then secure the preinstalled hex nut (F).
- 6. Attach the hex nut (F) and the metal pad (G) to the long threaded pipe (E), slip the acrylic diffuser and decorative cap (H) up through the long threaded pipe (E), then secure them with the finial (I).

NOTE: The depth of the lower hex nut (F) and the metal pad (G) in long threaded pipe may need to be adjusted to properly fit the acrylic diffuser. The acrylic diffuser should be flatly laid on three brackets, and the frosted side of the acrylic diffuser should be faced down.

Turn on the power at fuse or circuit box



The following parts are available for re-order if damaged or missing.

| Spare Parts List: | | | | | |
|-----------------------------|--|---------------|--------------------|------------|--|
| | | | | | |
| | annan G | | <u>)</u> | | → Mounting Hardware 6578MM (1SET) for C0278 |
| Mounting plate Unit (A) | nit (A) Mounting Screw (B) Wire Connector (C) Bolt Nut (J) | | | lut (J) | 6580MM (1SET) for C0279 |
| () | J | () | | | |
| | | | | | 1 |
| | | | | | |
| | 99 | 0 | \bigcirc | | Mounting Hardware 6579MM (1SET) for C0278 |
| Long Threaded Pipe (E) | Hex Nut (F) | Metal Pad (G) | Decorative Cap (H) | Finial (I) | 6581MM (1SET) for C0279 |
| | | | | | 1 |
| Acrylic Diffuser 10328AC | | | | | |

