




## 9ft Jackson Fir Unlit Tree

SKU# 1006185177

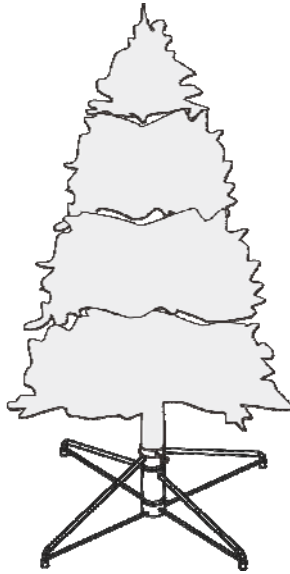

### Pre-Assembly

#### Package Contents

A. Top Section Qty: 1	B. Upper Middle Section Qty: 1	C. Lower Middle Section Qty: 1
D. Tree Bottom Qty: 1	E. Stand with an eye bolt Qty: 1	F. Latch Qty: 2
G. Threaded iron latch Qty: 2	H. Retainer washer Qty: 4	

#### Assembling the tree stand


- Step 1. Choose a location near a wall outlet.  
 Step 2. Open the stand to a 90 degree angle until the hole lines up with the hole on the tube.  
 Step 3. Screw an eye bolt into the hole.



### Assembly

#### Assembling the tree

- Please remove protective covers from the base of the pole for each tree section before assembling.
- Step 1. Insert tree bottom (D) into the tree stand and tighten the screw. (See Fig. 1)
  - Step 2. Insert lower middle section (C) into the tree bottom (D). (See Fig. 2)
  - Step 3. Insert upper middle section (B) into the lower middle section (C). (See Fig. 3)
  - Step 4. Insert tree top (A) into the upper middle section (B). (See Fig. 4)
  - Step 5. Allow branches to fall into place or gently pull branches up and out. When adjusting branches be sure that all wires are free of branch hinges. (See Fig. 5)
  - Step 6. Shape the branches. Starting with tips closest to the pole, shape one tip to the right, one to the left and one at the center of the main stem. Repeat pattern for each branch. (See Fig. 6)

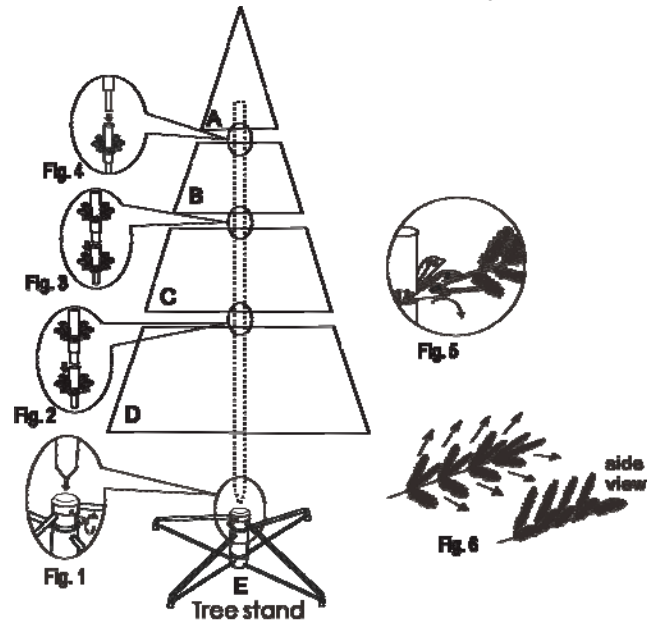

### Troubleshooting

#### Loose branches

1. If a branch of the tree in section A, B or C falls off, follow the steps below to reinstall it with a spare latch (F).
  - 1) Place the branch into the slot of the bracket.
  - 2) Insert a spare latch through the hole and use diagonal pliers (not included) to crimp the latch. (See Fig. A)
2. If a branch of the tree in section D falls off, follow the steps below to reinstall it with a spare threaded iron latch (G) and two retainer washers (H).
  - 1) Place the branch into the slot of the bracket.
  - 2) Insert a spare threaded iron latch (G) through the hole and secure using two retainer washers (H). (See Fig. B)

