



Rating	20A 125VAC 1/3HP	Mounting Hole 	Circuit Diagram 									
	16A 250VAC 1/2HP 											
	16A125VAC 10A250VAC CQC T85											
	16(4)A250Va.c 											
	16A125VAC 10A250VAC  T85											
	10(4)A 250~  25T85											
Contact Resistance	50m ohm Max.											
Insulation Resistance	DC 500V 100M ohm Min.											
Dielectric Strength	AC 1500V 1 minute											
Operation Temperature	-25°C ~ 85°C	Thickness <table><tr><td>0.75...1.25</td><td>27.6-0.1</td><td>13.8+0.1</td></tr><tr><td>1.25.....2</td><td>27.8-0.1</td><td>13.8+0.1</td></tr><tr><td>2.....3</td><td>28.0-0.1</td><td>13.8+0.1</td></tr></table>	0.75...1.25	27.6-0.1	13.8+0.1	1.25.....2	27.8-0.1	13.8+0.1	2.....3	28.0-0.1	13.8+0.1	
0.75...1.25	27.6-0.1	13.8+0.1										
1.25.....2	27.8-0.1	13.8+0.1										
2.....3	28.0-0.1	13.8+0.1										
Switch Function	2P SPST ON-OFF											



Material:
Frame: Black, Nylon 66
Actuator: Black, Nylon 66
Printed: None

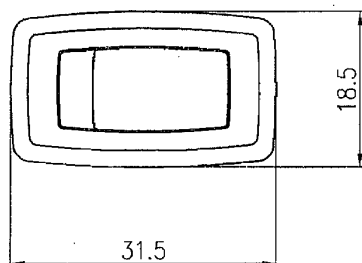