



Item # 1001 509 635  
1001 488 133  
1005 990 180

Model # G3602T-US  
G3602TR-US


## USE AND CARE GUIDE

### 36 IN. STORAGE CABINET

Questions, problems, missing parts?  
Before returning to the store, call  
Husky Customer Service  
8 a.m. - 7 p.m., EST, Monday - Friday  
9 a.m. - 6 p.m., EST, Saturday

1-888-43-HUSKY

[WWW.HUSKYTOOLS.COM](http://WWW.HUSKYTOOLS.COM)

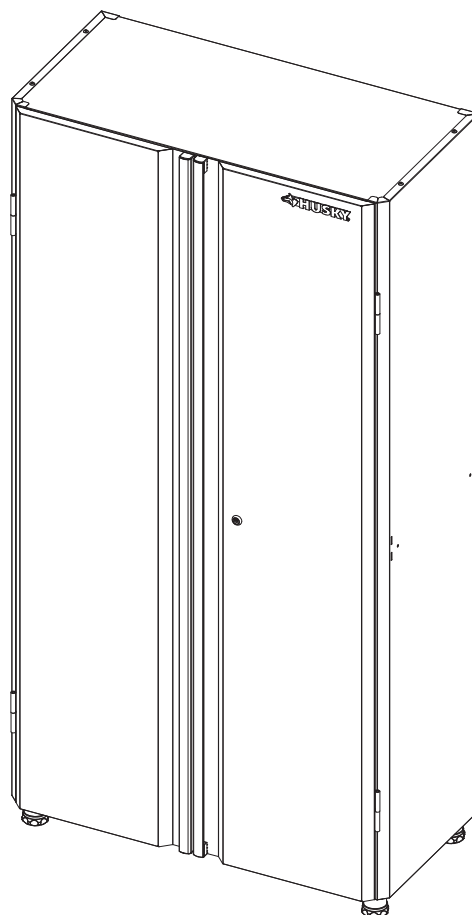

Due to continuing improvements,  
the actual product may differ slightly  
from the product described herein.

#### THANK YOU

*We appreciate the trust and confidence you have placed in Husky through the purchase of this cabinet. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Husky!*

## Table of Contents

|                          |   |
|--------------------------|---|
| Table of Contents .....  | 2 |
| Safety Information ..... | 2 |
| Warranty .....           | 2 |
| Specifications .....     | 3 |
| Pre-Installation .....   | 3 |

|                         |    |
|-------------------------|----|
| Assembly .....          | 5  |
| Maintenance .....       | 10 |
| Care and Cleaning ..... | 10 |
| Service Parts .....     | 10 |

## Safety Information

To reduce the risk of serious injury, read and follow the safety instructions below before assembling and using this product.

- This product is intended for indoor use only.
- This product is not designed for commercial nor industrial usage.



**CAUTION:** Use at least two people to move, assemble or install this product. Failure to do so can result in personal injury or product damage. Any assembly or maintenance of the product must be carried out by adults only.



**CAUTION:** Close and lock the doors before moving this product.



**CAUTION:** DO NOT alter this product in any manner. For example, do not weld external bar locks or attach electrical equipment. This may cause product damage or personal injury.



**CAUTION:** Check all nuts and bolts periodically for tightness. When required, tighten them.



**CAUTION:** DO NOT leave children unattended near this product. Cabinet may tip over if improperly opened.



**WARNING:** Keep the product on level surfaces. The product could become unstable and it may tip over if stored or moved on an uneven surface, which may cause personal injury, death or product damage.



**WARNING:** DO NOT put anything on the top panel of this product.



### WARNING

- Unit must be placed on a level surface or leveled with included hardware (when applicable).
- Do not sit or stand on or allow children to climb, sit or stand on the assembled product.
- For safety reasons, it is imperative that this unit be mounted on the wall or floor.
- Do not use without installing the tip restraint.
- Unit can tip over causing severe injury or death.
- Never open more than one drawer at a time.
- Do not exceed the recommended weight limits.
- Evenly distribute the weight on each level and always keep the heavier loads on the bottom.
- Before cutting, drilling or hammering into any wall or floor surface, verify the location of electrical, plumbing and gas lines. Cutting may cause serious injury.

## Warranty

This warranty excludes incidental/inconsequential damages and failures due to misuse, abuse or normal wear and tear.

This full warranty gives you specific rights, and you may also have other rights, which vary state to state.


Contact the customer service team at 1-888-43-HUSKY or visit [www.huskytools.com](http://www.huskytools.com).

# Specifications


|                               |                   |
|-------------------------------|-------------------|
| Maximum load for each door    | 11 lbs. / 5 kg    |
| Maximum load for each shelf   | 150 lbs. / 68 kg  |
| Maximum load for bottom panel | 150 lbs. / 68 kg  |
| Maximum total load            | 622 lbs. / 282 kg |

# Pre-Installation

## TOOLS REQUIRED




Hex Wrench (Hex Key)



Drill  
(not included)



Safety Goggles  
(not included)



Socket (10mm)  
(not included)



Hex Screwdriver Bit




Gloves  
(not included)


## HARDWARE INCLUDED



**NOTE:** Hardware not shown to actual size.




AA




BB



CC



DD



EE



FF




GG

| Part | Description                       | Quantity |
|------|-----------------------------------|----------|
| AA   | M6 x 16 hex socket head screw     | 42       |
| BB   | M6 x 40 hex tapping bolt          | 2        |
| CC   | Shelf bracket                     | 12       |
| DD   | Adjustable foot                   | 4        |
| EE   | Safety bracket                    | 1        |
| FF   | M6 x 16 hex socket head cap screw | 2        |
| GG   | Grommet                           | 2        |

# Pre-Installation (continued)

## PACKAGE CONTENTS

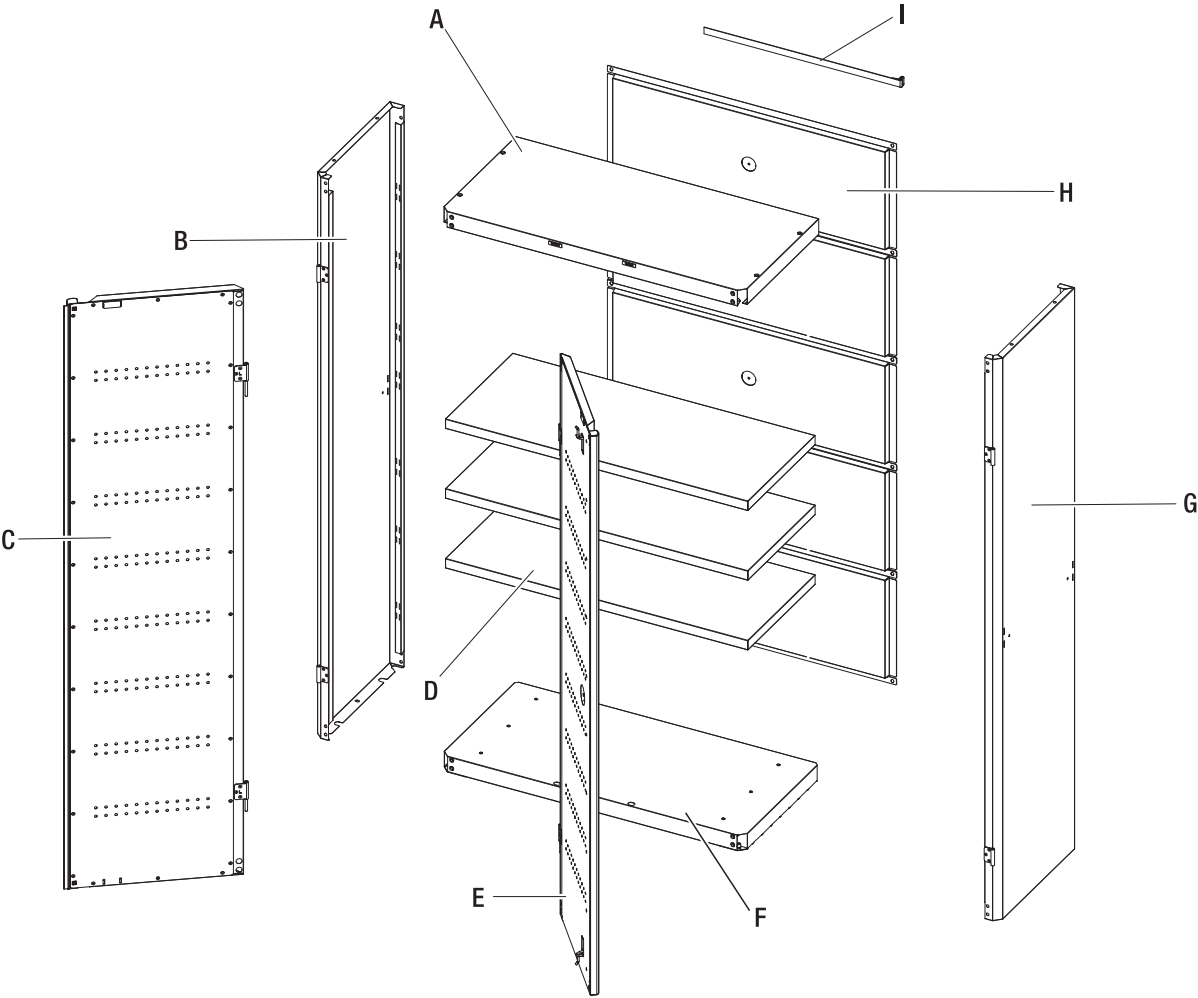

| Part | Description     | Quantity |
|------|-----------------|----------|
| A    | Top panel       | 1        |
| B    | Left side panel | 1        |
| C    | Left door       | 1        |
| D    | Shelf           | 3        |
| E    | Right door      | 1        |

| Part | Description      | Quantity |
|------|------------------|----------|
| F    | Bottom panel     | 1        |
| G    | Right side panel | 1        |
| H    | Back panel       | 5        |
| I    | Safety strap     | 1        |

# Assembly



**CAUTION:** Assemble on a flat surface. Make sure the surface is free of debris or the cabinet is protected. A piece of cardboard is recommended to keep the product from being scratched during assembly.



**CAUTION:** Please wear gloves during the whole assembling process to avoid accidental personal injury.




**IMPORTANT:** For aesthetic, films of doors and side panels are suggested to be peeled off before assembly. If customer prefers, plastic films may be left in place with no harm.



**IMPORTANT:** To avoid overtightening, use of a hand screwdriver with hex attachment is preferred. Use care to ensure threads line up. When power drivers are used for assembly, it is recommended to adjust the torque to 5 - 6 N·m (44 - 53 lbf·in). DO NOT exceed 8 N·m (70 lbf·in).


## 1 ATTACH THE SIDE AND BOTTOM PANELS

Identify the front and back as shown and attach the side panels (B & G) and bottom panel (F) together. No screws for fixation at this step.

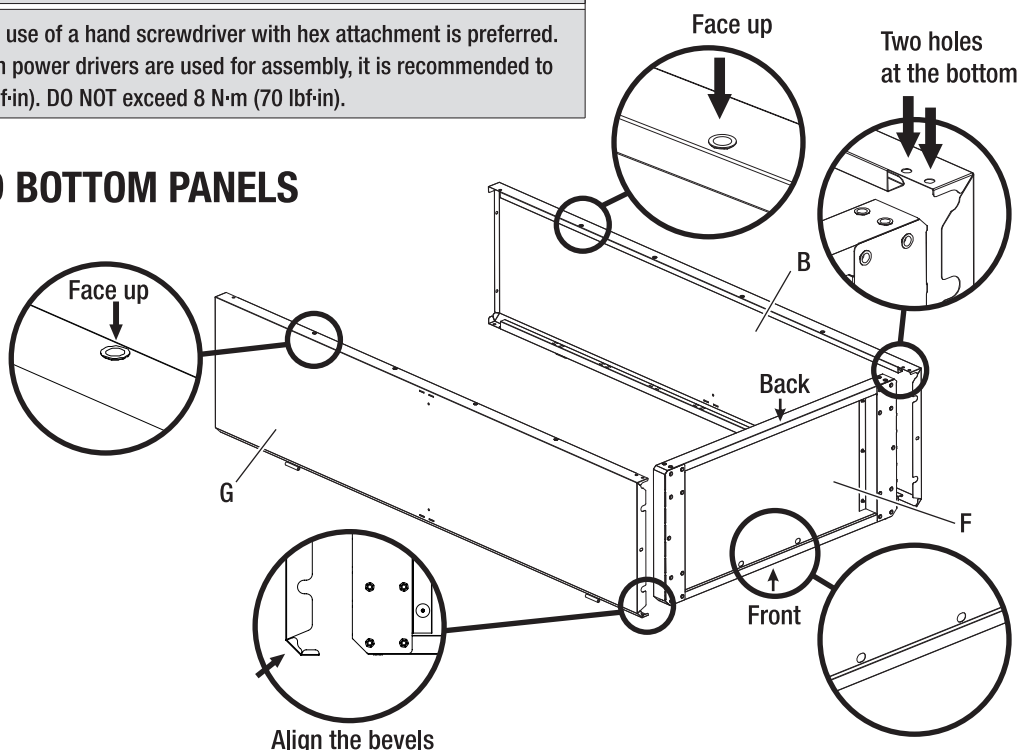

## 2 INSTALL THE ADJUSTABLE FEET


- Fix the side panels (B & G) and the bottom panel (F) with two M6 x 16 hex socket head screws (AA). Tighten securely.
- Install the adjustable feet (DD) to the bottom panel (F). Make sure side A of the adjustable feet (DD) are facing towards the outside of the cabinet. Tighten securely with sixteen M6 x 16 hex socket head screws (AA).

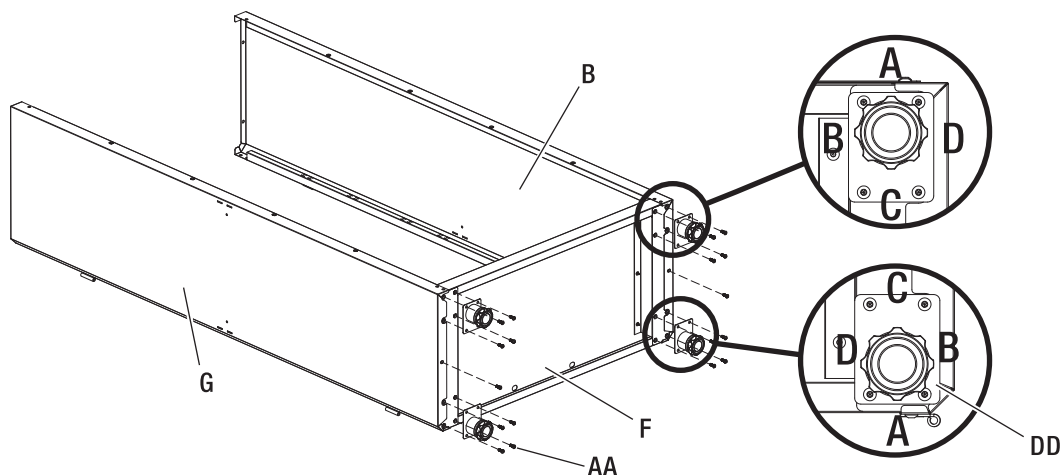

## Assembly (continued)

### 3 ATTACH THE TOP PANEL

Attach the top panel (A) to the side panels (B & G) with four M6 x 16 hex socket head screws (AA). Tighten securely.

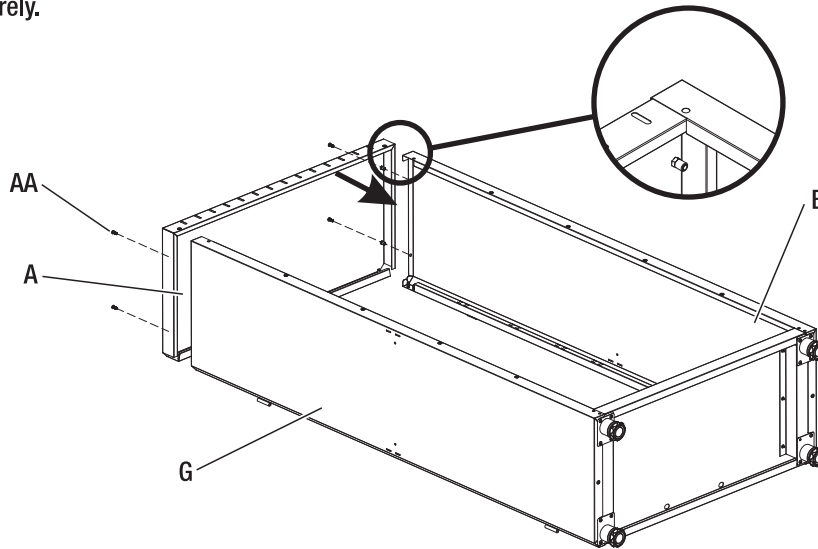


### 4 ATTACH THE BACK PANELS



**CAUTION:** Be sure to hand tighten screws first to ensure proper alignment of panels and doors.

- Lay the cabinet on its face.
- Attach the back panels (H) to the back of the cabinet with twelve M6 x 16 hex socket head screws (AA). Tighten screws only by hand. **DO NOT tighten for this step.**
- Fix the side panels (G & B) and bottom panel (F) together with two M6 x 16 hex socket head screws (AA). Tighten screws only by hand. **DO NOT tighten for this step.**

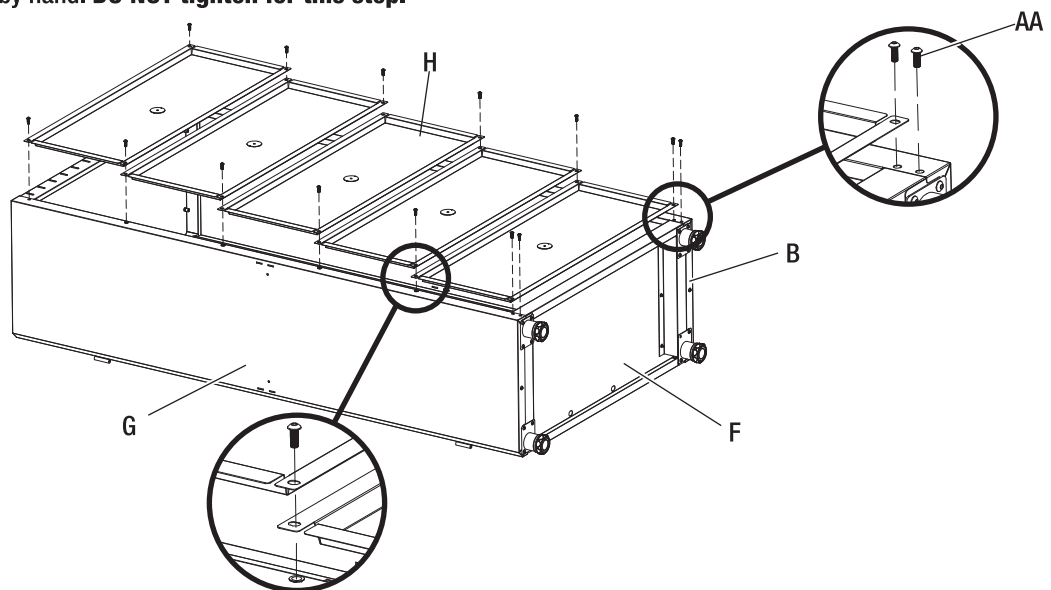

## Assembly (continued)

### 5 FIX THE TOP PANEL, BOTTOM PANEL AND SIDE PANELS




**CAUTION:** Two M6 x 16 hex socket head cap screws (FF) (security screws) should be fixed to the left bottom face of cabinet for additional door security.




**CAUTION:** Be sure to hand tighten screws first to ensure proper alignment of panels and doors.

- Fix the top panel, bottom panel and side panels with six M6 x 16 hex socket head screws (AA) and two M6 x 16 hex socket head cap screws (FF). Tighten screws only by hand. **DO NOT tighten for this step.**

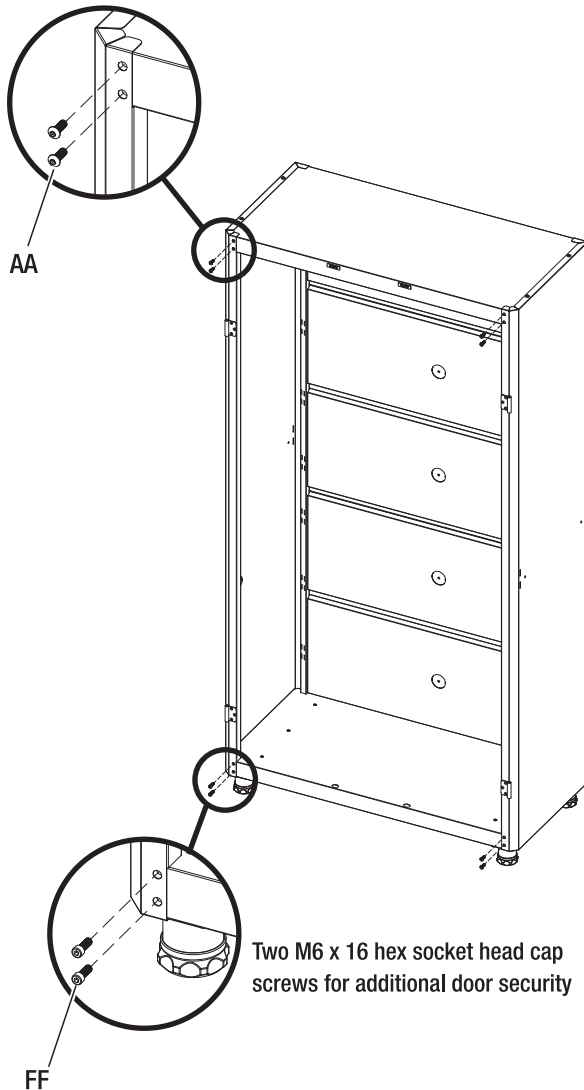

### 6 ATTACH THE DOORS

- Insert the pins of the hinges on the left door (C) into the slots of the bottom hinges at the front of the left side panel (B).
- Repeat the same procedure to attach the right door (E).

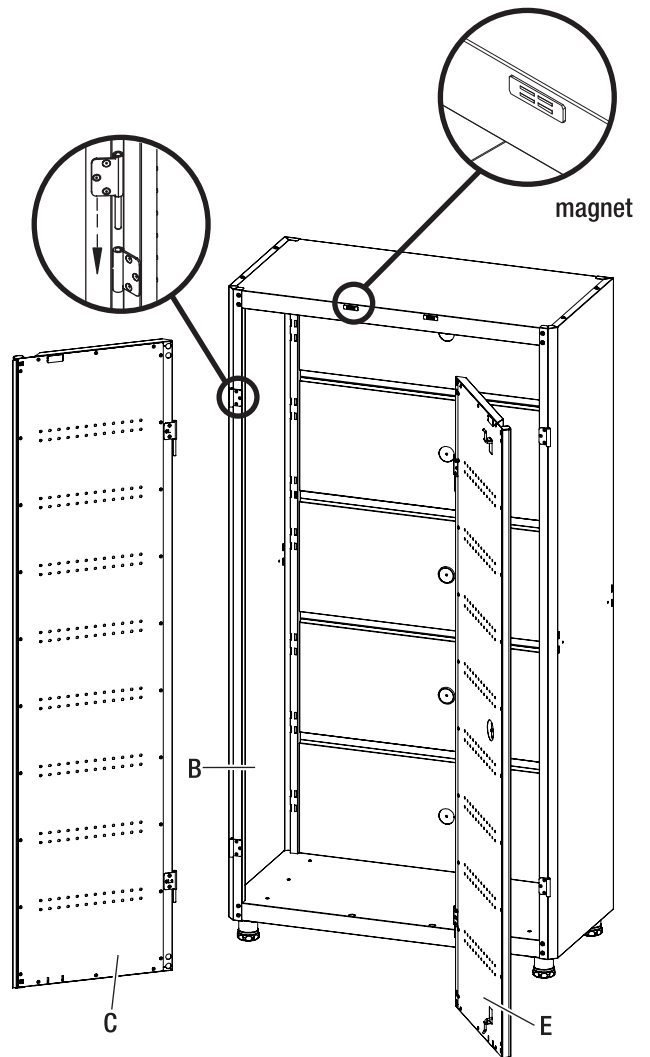


## Assembly (continued)

### 7 SQUARING THE CABINET AND TIGHTENING THE SCREWS




**CAUTION:** You need one more person for assistance to complete this step.


- Close the doors to see if they are flush with each other. If not, adjust the cabinet's top and side panels to make sure the shape of the cabinet is square and flush.
- When the doors catch the magnets completely and are flush, tighten all the screws at the cabinet back and front.



Back



Front

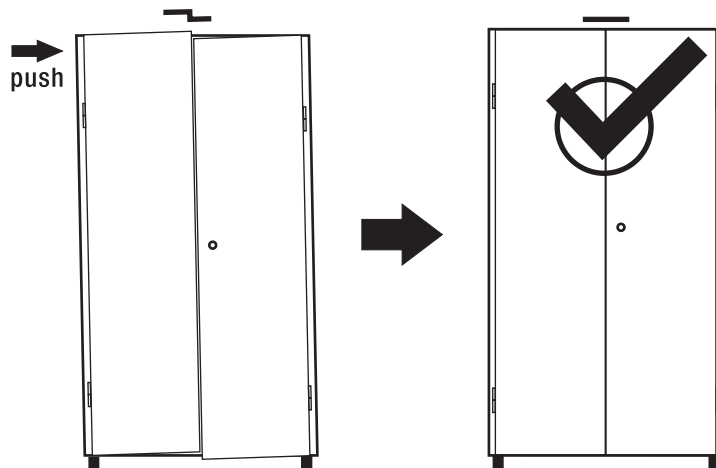

### 8 CONNECTING THE CABINET TO THE WALL



**CAUTION:** The M6 x 40 hex tapping bolts (BB) should be drilled into the stud of the wall.




**CAUTION:** The safety bracket's bottom M6 x 40 hex tapping bolt should be 70.4 in. from the floor.




**CAUTION:** For safety, two people at least are required at this step.

- Install the safety bracket (EE) to the wall with two M6 x 40 hex tapping bolts (BB).
- Move the cabinet against the wall. The doors may misalign due to floor unevenness. To solve this problem, with one person holding the cabinet, adjust the feet (DD) to make the doors flush.
- Fasten the tall cabinet by using the safety strap (I) to tie the tall cabinet and safety bracket (EE) together. Tighten securely.

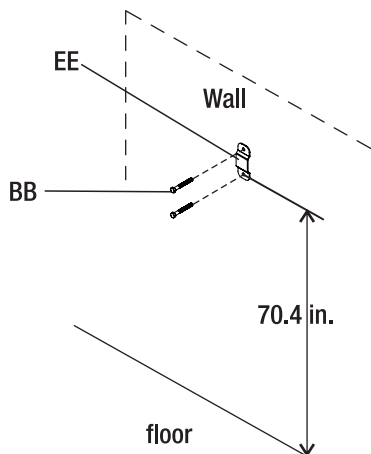

View from cabinet top


View from inside of cabinet

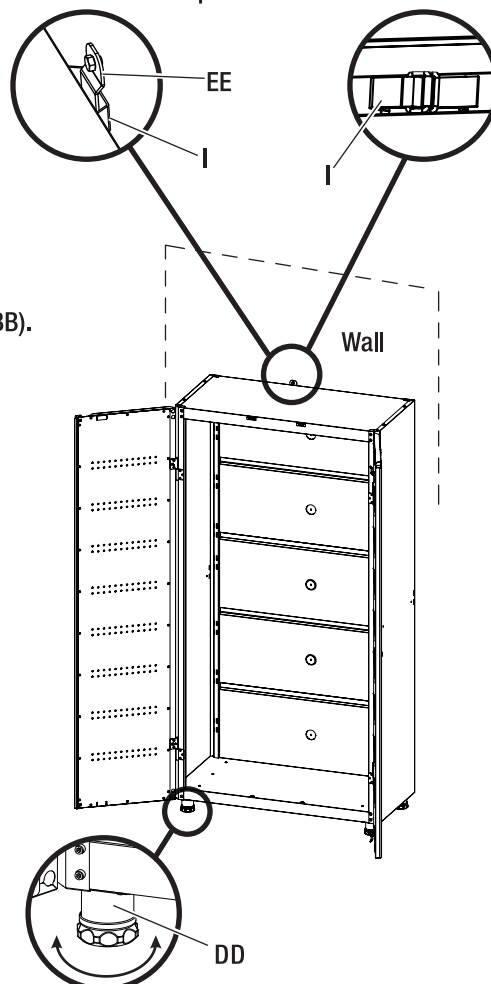

## Assembly (continued)



### 9 INSTALL THE SHELVES

- Insert twelve shelf brackets (CC) into the slots on the side panels at the desired height. Make sure the four brackets (CC) for each shelf (D) are at the same height.
- Place the shelves (D) over the shelf brackets (CC), and push them down onto the shelf brackets.
- Make sure the shelves (D) are properly and safely locked by the upright hooks of the shelf brackets.

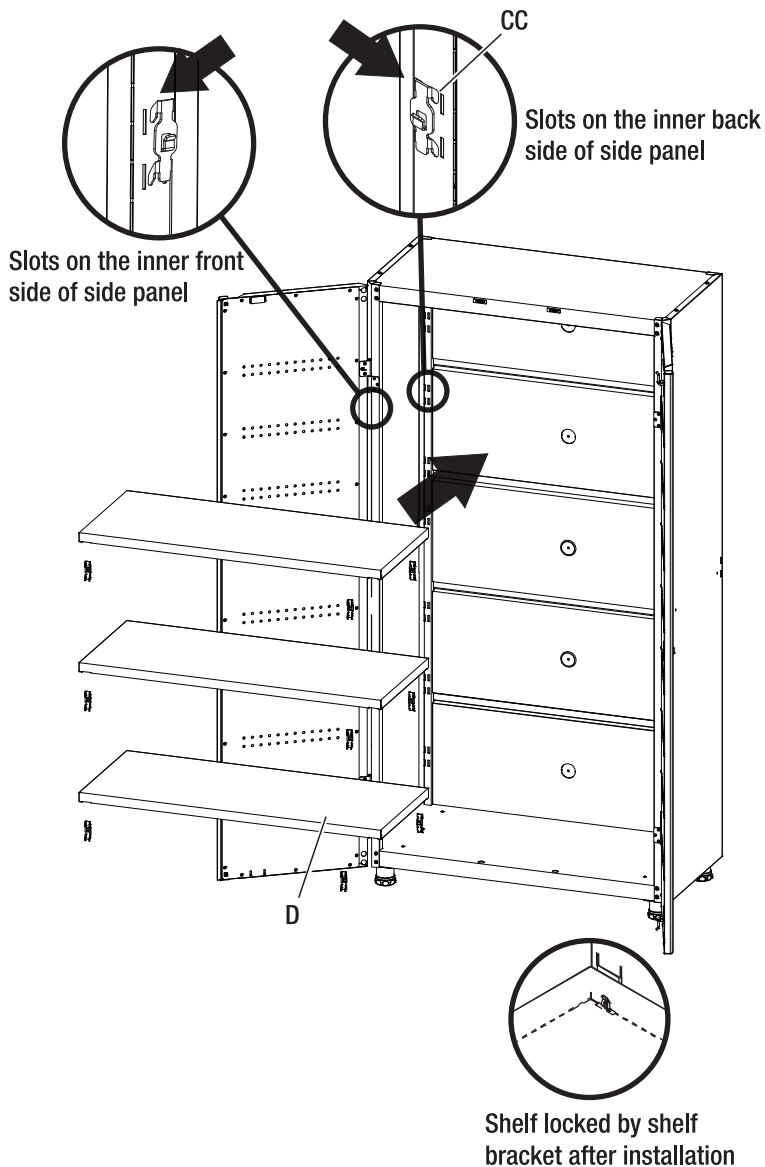

### 10 INSTALL THE GROMMETS

- Insert the short side of the hex wrench by half into your desired cord access holes, and pry the knock-outs towards your side.
- Take away the knock-outs carefully and install the grommets (GG).

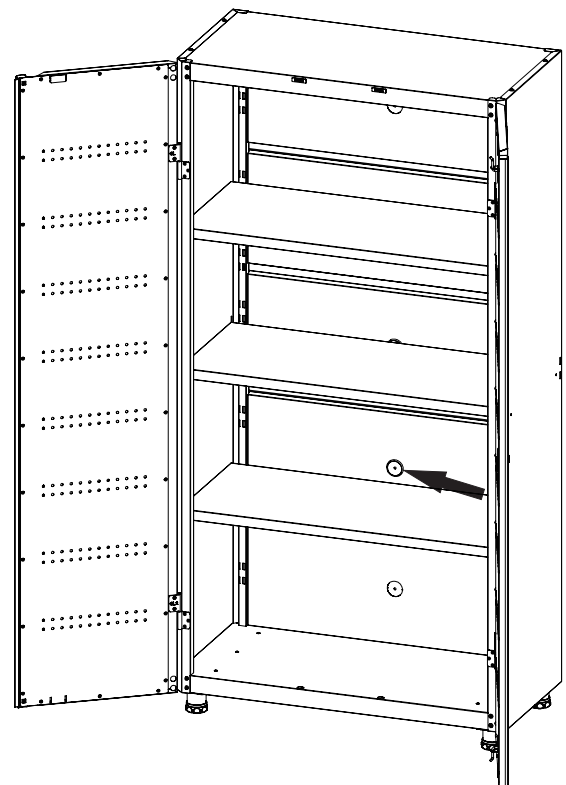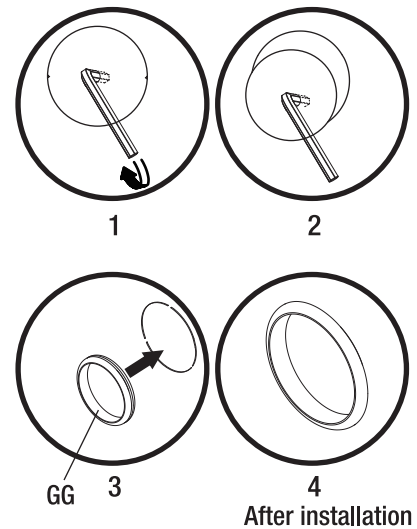


## Maintenance

- Check all the screws and nuts periodically for tightness. Tighten them when necessary.
- Check the safety strap periodically for tightness. Tighten it when necessary.

## Care and Cleaning

- Periodically clean the surfaces with a soft rag and water.
- Grease and oil can be removed with most standard cleaning fluids. For safety, use a nonflammable cleaning fluid.

## Service Parts

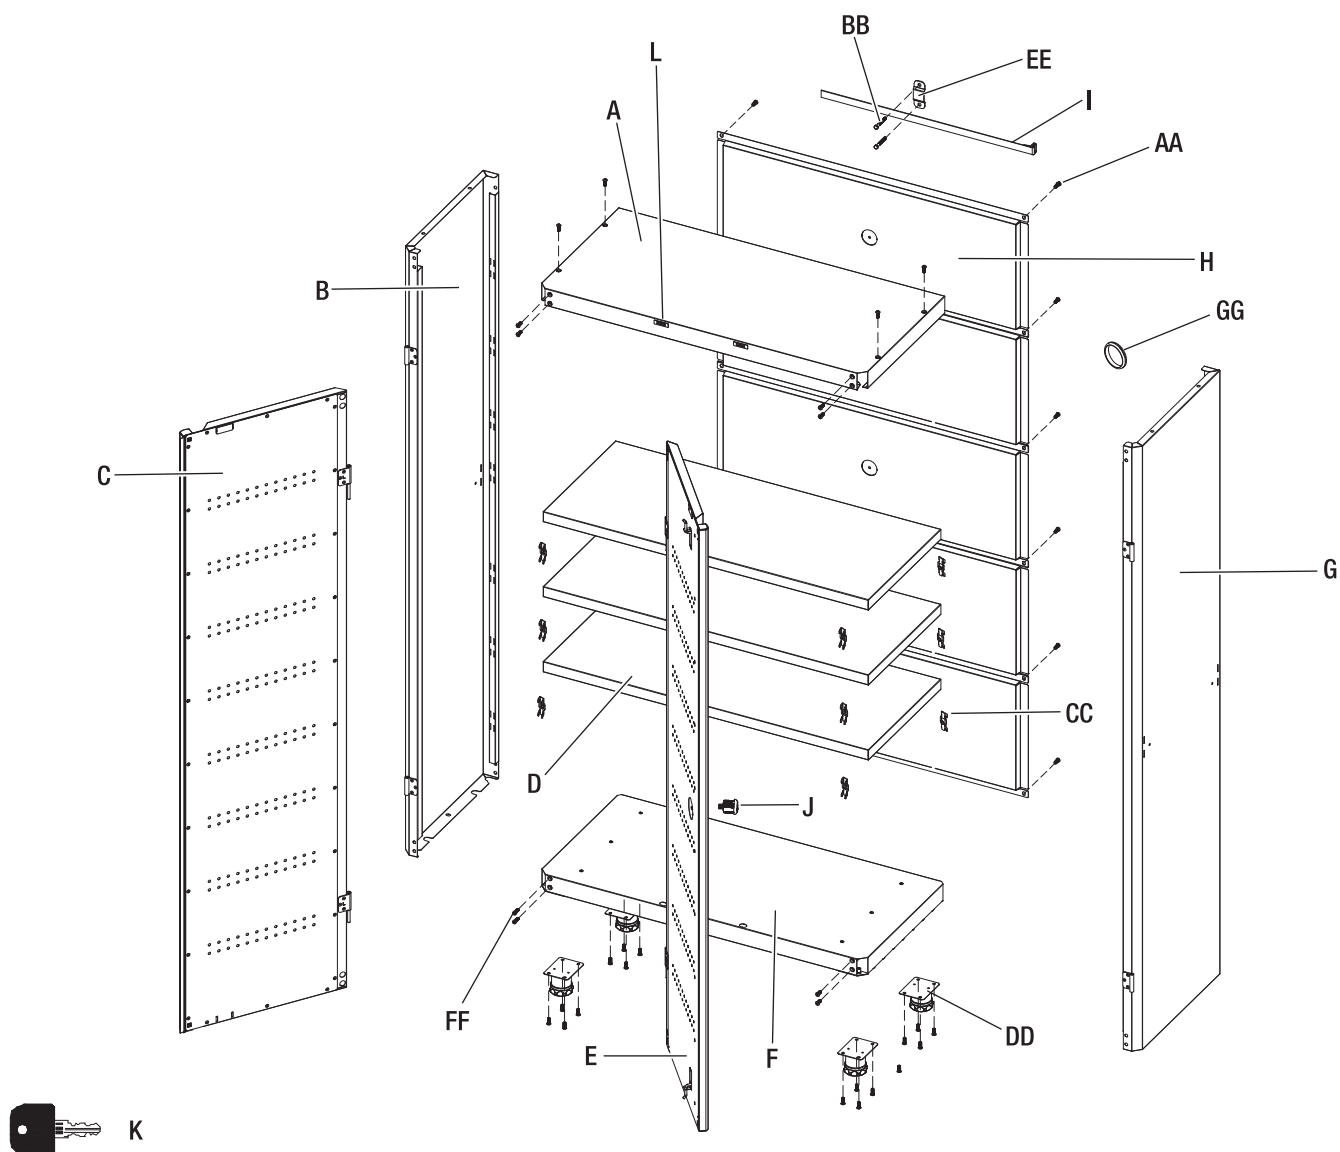

## Service Parts (continued)

### 36 in. Storage cabinet (Black): Model #: G3602T-US; SKU 1001 509 635 / 1001 488 133

| Part | Replacement Part # | Description      | Quantity |
|------|--------------------|------------------|----------|
| K    | 304213             | Key              | 2        |
| A    | 121816             | Top panel        | 1        |
| B    | 121814             | Left side panel  | 1        |
| C    | 123419             | Left door        | 1        |
| D    | 243264             | Shelf            | 3        |
| E    | 123420             | Right door       | 1        |
| F    | 121817             | Bottom panel     | 1        |
| G    | 121815             | Right side panel | 1        |
| H    | 243259             | Back panel       | 5        |

| Part | Replacement Part # | Description                       | Quantity |
|------|--------------------|-----------------------------------|----------|
| I    | 314230             | Safety strap                      | 1        |
| J    | 304212             | Lock                              | 1        |
| L    | 312033             | Magnet                            | 2        |
| AA   | 320327             | M6 x 16 hex socket head screw     | 42       |
| BB   | 320328             | M6 x 40 hex tapping bolt          | 2        |
| CC   | 243311             | Shelf bracket                     | 12       |
| DD   | 313066             | Adjustable foot                   | 4        |
| EE   | 212591             | Safety bracket                    | 1        |
| FF   | 320346             | M6 x 16 hex socket head cap screw | 2        |
| GG   | 314027             | Grommet                           | 2        |

### 36 in. Storage cabinet (Red): Model #: G3602TR-US; SKU 1005 990 180

| Part | Replacement Part # | Description      | Quantity |
|------|--------------------|------------------|----------|
| K    | 304213             | Key              | 2        |
| A    | 122256             | Top panel        | 1        |
| B    | 122250             | Left side panel  | 1        |
| C    | 123422             | Left door        | 1        |
| D    | 244164             | Shelf            | 3        |
| E    | 123421             | Right door       | 1        |
| F    | 122257             | Bottom panel     | 1        |
| G    | 122251             | Right side panel | 1        |
| H    | 244163             | Back panel       | 5        |

| Part | Replacement Part # | Description                       | Quantity |
|------|--------------------|-----------------------------------|----------|
| I    | 314230             | Safety strap                      | 1        |
| J    | 304212             | Lock                              | 1        |
| L    | 312033             | Magnet                            | 2        |
| AA   | 320327             | M6 x 16 hex socket head screw     | 42       |
| BB   | 320328             | M6 x 40 hex tapping bolt          | 2        |
| CC   | 243311             | Shelf bracket                     | 12       |
| DD   | 313066             | Adjustable foot                   | 4        |
| EE   | 212591             | Safety bracket                    | 1        |
| FF   | 320346             | M6 x 16 hex socket head cap screw | 2        |
| GG   | 314027             | Grommet                           | 2        |



**CAUTION:** Replacement keys may be ordered. Call 1-844-370-2288 .



Questions, problems, missing parts? Before returning to the store,  
call Husky Customer Service

8 a.m. - 7 p.m., EST, Monday - Friday

9 a.m. - 6 p.m., EST, Saturday

**1-888-43-HUSKY**

**[WWW.HUSKYTOOLS.COM](http://WWW.HUSKYTOOLS.COM)**

Retain this manual for future use.