

Safety Information (continued)



WARNING: Wear safety goggles at all times when working with pumps.



WARNING: When possible, connect the pump DIRECTLY to a grounded, GFCI outlet. Extension cords may not deliver sufficient voltage to the pump motor. Extension cords present a life-threatening safety hazard if the insulation becomes damaged or the connection ends fall into water. If using 25 ft. extension cord, use 16-gauge wire or thicker. If using a 50 ft. cord, use 14-gauge wire or thicker.



WARNING: Protect the electrical cord from sharp objects, hot surfaces, oil, and chemicals. Avoid kinking the cord. Do not use damaged or worn cords.



WARNING: Never operate this pump unless it is secured to a solid foundation. Do not suspend the pump by the discharge hose or power cord. Keep the pump suction strainer clear.



WARNING: Ensure that the electrical circuit to the pump is protected by a 15-amp minimum fuse or circuit breaker.



CAUTION: Know the pump and its applications, limitations, and potential hazards.



CAUTION: Periodically inspect the pump and system components to ensure the pump suction screen is free of mud, sand, and debris. Disconnect the pump from the power supply before inspecting.



CAUTION: Follow all electrical and safety codes, particularly the National Electrical Code (NEC) and in the workplace, the Occupational Safety and Health Act (OSHA).



IMPORTANT: Ensure the electrical power source is adequate for the requirements of the pump.



IMPORTANT: When the pump is running dry, it will be EXTREMELY LOUD. This is a sign to unplug the pump.



IMPORTANT: For safety, this pump motor has an automatic resetting thermal protector that automatically turns the pump off if it becomes too hot. **Overuse of this feature will damage the pump and will void the warranty.**



IMPORTANT: DO NOT RUN THE PUMP DRY. The pump depends on water for cooling and lubrication. Operating the pump without water may cause the motor to overheat or cause damage to parts of the pump. It may also shorten the life of your pump.



IMPORTANT: This pump is made of high-strength, corrosion-resistant materials. It will provide trouble-free service for many years when properly used and maintained. However, inadequate electrical power to the pump, or blockage by ice, dirt, or debris may cause the pump to fail. Please carefully read the manual and follow the instructions regarding common pump problems and remedies.



IMPORTANT: Do not leave pump unattended while in operation. Always make sure the pump is unplugged as soon as the water level reaches 1/8 in. At water levels less than this, the pump is attempting to pump air, which will cause the pump to be damaged. Running the pump without sufficient water will damage the pump and void the warranty.



IMPORTANT: You must use the included clear suction hose on the inlet of this pump, as marked on the pump. Before using this pump, check the hose for holes or excess wear, which could cause leaks. Ensure the hose is not kinked or making sharp angles. A straight hose allows the pump to move the greatest amount of water quickly. Also check that all hose connections are tight to minimize leaks.



IMPORTANT: This pump is not intended for use in sewage or septic systems. Doing so will void warranty.



IMPORTANT: Always use one of the suction strainers included with this pump to prevent debris from damaging the pump.

Warranty

The manufacturer warrants to the original purchaser that it will be free from any defect in materials and/or workmanship for one (1) year from date of purchase. This limited warranty is extended ONLY to the original purchaser, and only covers products purchased as new. If during this one-year period, the original purchaser experiences a defect which is covered by this limited warranty, it will be repaired or replaced (at manufacturer's sole option) at no cost to the purchaser. Defective parts will be repaired or replaced with new or factory rebuilt parts at the manufacturers' sole option.

The purchaser must pay all labor and shipping charges necessary to replace the product covered by this warranty.

Warranty (continued)

This limited warranty is in lieu of any other warranties, express or implied, including any implied warranty of merchantability or fitness for a particular purpose, or otherwise, and of any other obligations or liability on the seller's part. This limited warranty does not cover non-defect damage, damage caused by improper installation, or care (including but not limited to abuse, misuse, failure to provide reasonable and necessary maintenance, or dismantling or for reinstalling a repaired or replaced product or component). **The impeller and brushes are not covered under the warranty, as they are normal wear items. A replacement impeller and set of brushes are included with this pump.**

Under no circumstances shall the manufacturer be liable for consequential, incidental, or special damages arising in connection with the use of, or inability to use this product. In no event shall manufacturer's liability for breach of warranty, breach of contract, negligence or strict liability exceed the cost of the product covered hereby. No person is authorized to assume for us any liability in connection with the sale of this product. Some states do not allow limitations on implied warranties and the exclusion or limitation of consequential, incidental, or special damages, so the above limitation or exclusion may not apply to you. This limited warranty gives you specific legal rights and you may also have other rights which vary from state to state.

Contact the Customer Service Team at 1-844-251-7446 or visit HOMEDEPOT.COM.


Pre-installation

APPLICATION

- This pump is designed for portable applications. It can drain or remove water from the following: flooded areas, pool covers, clogged sinks, waterbeds, water basins, boats, stock tanks, etc. It can also be used to fill tanks or water beds.
- This pump has not been tested or approved for use in swimming pools or in salt-water marine areas.
- This pump should not be used as a replacement for a sump pump.

PACKAGE CONTENTS

Part	Description
A	Pump
B	6 ft. Suction Hose
C	Puddle Suction Strainer
D	Suction Strainer
E	Repair Kit

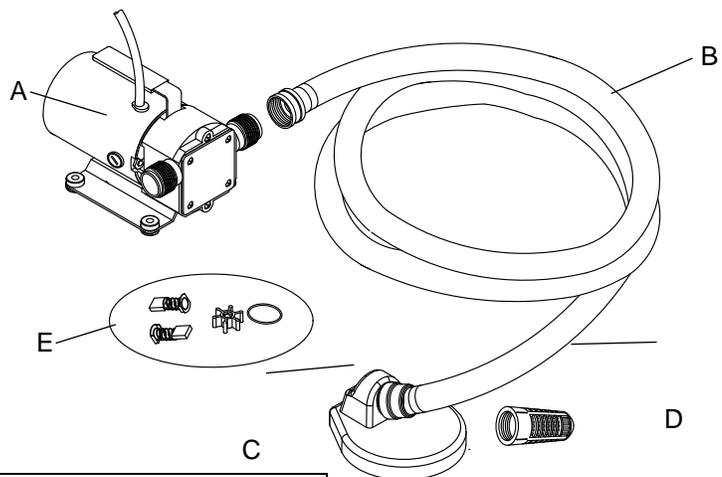

SPECIFICATIONS

Power Supply Required	115V, 60 HZ
Liquid Temp. Range	32°F to 95°F (0°-35°C)
Individual Branch Circuit Required	15 Amp Minimum
Discharge Connection	3/4 in. garden hose connection
Discharge Hose Needed	3/4 in. garden hose
Power Cord	SJTW, 18AWG/3C, 8.36 ft.