


KNOW YOUR UNIT

NO ASSEMBLY TOOLS REQUIRED

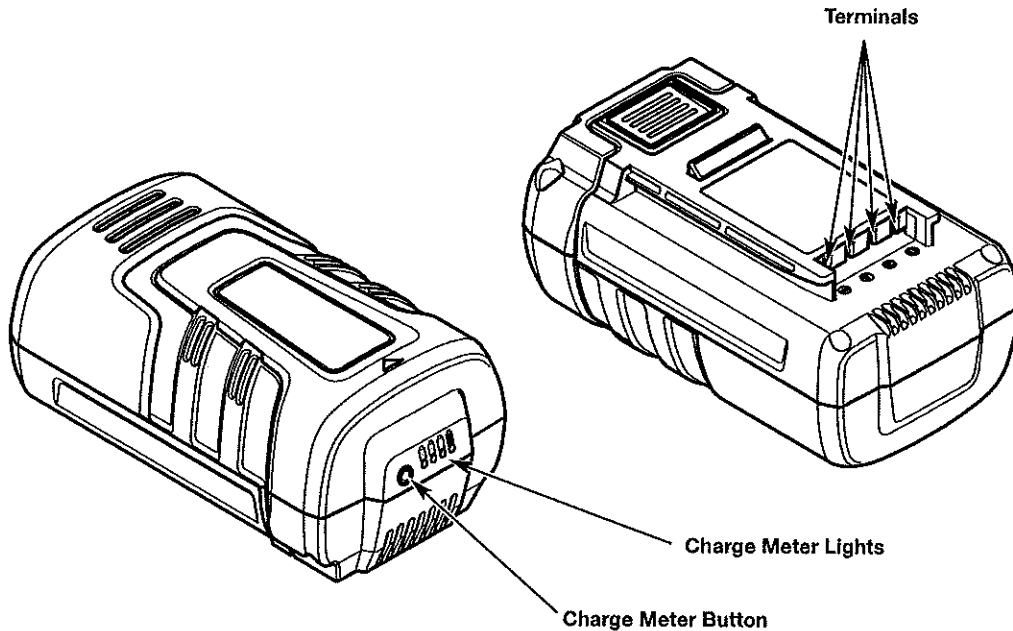

SPECIFICATIONS

Battery Type (Model RM4130)	40V, 2.5 Ah Lithium-Ion
Battery Type (Model RM4140)	40V, 4.0 Ah Lithium-Ion
Battery Type (Model RM4150)	40V, 5.0 Ah Lithium-Ion
Approximate Battery Weight (Model RM4130)	1.9 - 2.4 lbs. (0.9 - 1.1 kg)
Approximate Battery Weight (Model RM4140)	2.9 - 3.4 lbs. (1.3 - 1.5 kg)
Approximate Battery Weight (Model RM4150)	3.0 - 3.5 lbs. (1.4 - 1.6 kg)
Optimum Battery Charging Temperature	32° to 104° F (0° to 40° C)
Optimum Battery Storage Temperature	64° to 73° F (18° to 23° C)
Optimum Battery In-Use Temperature	32° to 113° F (0° to 45° C)

All specifications are based on the latest product information available at the time of printing. We reserve the right to make changes at any time without notice.

ASSEMBLY

CHARGING THE BATTERY

The battery is not shipped fully charged. For maximum run time, fully charge the battery before each use. Refer to *Charging the Battery* in the unit and/or battery charger operator's manual.

NOTE: Lithium-ion batteries will not develop a memory and may be charged at any time.