


ASSEMBLY AND INSTALLATION INSTRUCTIONS

LK35454



WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. The combined weight of your ceiling fan and light kit cannot exceed 35 pounds unless additional support is provided for the fan.

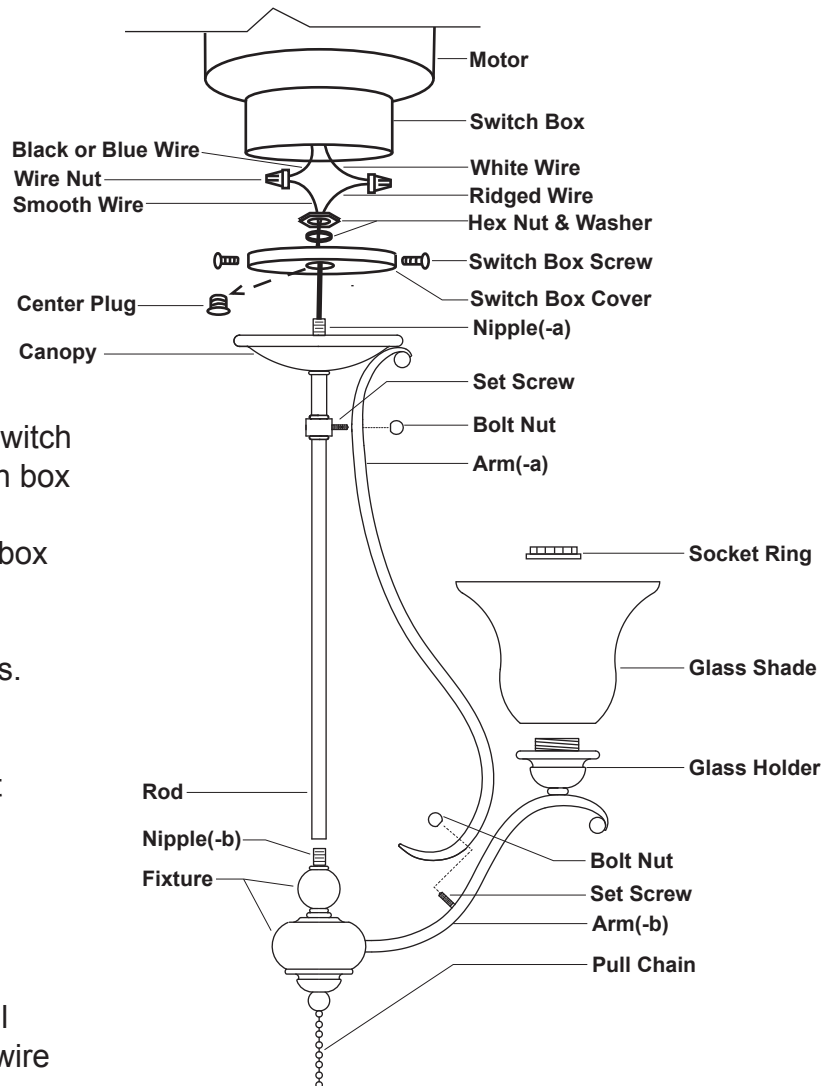

For Light Kit:

1. Remove the switch box cover from the switch box of the fan by loosening the three switch box screws.
2. Unscrew the center plug from the switch box cover and discard it.
3. Secure the rod to nipple(-b).
4. Unscrew the bolt nuts from the set screws.
5. Attach a arm(-a) to the rod and a arm(-b) according to the drawing of the package by inserting the set screws, then secure it with the bolt nuts.
Repeat with other arms(-a).
6. Attach nipple(-a) of the light kit to the switch box cover, then secure it with a washer and hex nut.
7. Cut the redundant wires if necessary. Pull out the wires from the switch box. Make wire connections using the wire nuts:
 - The smooth (marked) wire from the fixture to the black (or blue) wire from the switch box.
 - The ridged (unmarked) wire from the fixture to the white wire from the switch box.Carefully tuck the wires back into the switch box.
8. Attach the switch box cover back to the switch box using the three switch box screws.
9. Attach the glass shades to the glass holders and secure them with the socket rings.
10. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
11. Turn on the power at the main fuse or circuit breaker box. (You can control the light with the pull chain.)

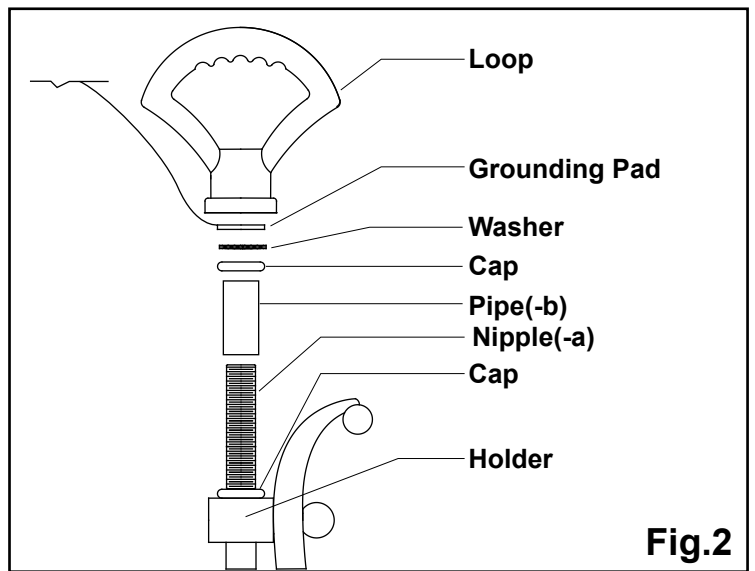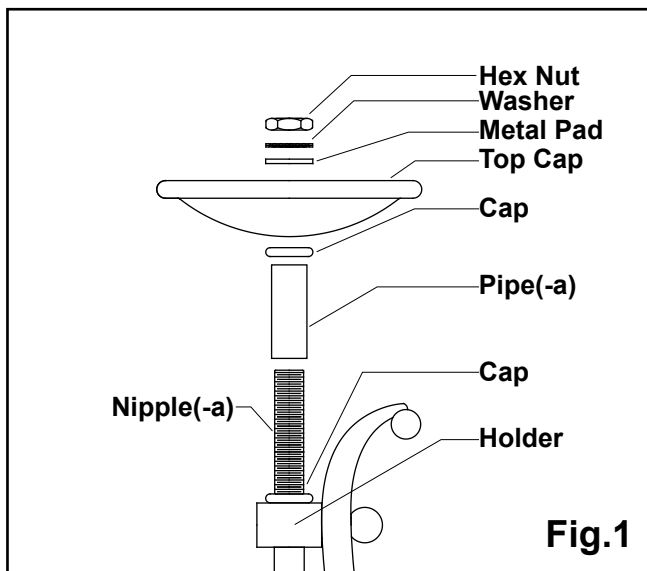

For Mini Chandelier: (See Fig.1, Fig.2 & Fig.3)

1. Unscrew and take out the hex nut, washer, metal pad, top cap, cap and pipe(-a) from nipple(-a). (See Fig.1)
2. Take out the loop, grounding pad and pipe(-b) from the hardware package for Mini Chandelier.
3. Attach pipe(-b), cap with the open side facing downward, washer and grounding pad to the holder by inserting nipple(-a), then secure them with the loop. (See Fig.2)
4. Repeat the steps 3~5 for Light Kit.
5. Choose the length of the chain you need, then weave the fixture wire and the fixture grounding wire through the chain. Then connect one end of the chain with the loop by using one loop lock.
6. Secure the top loop to nipple(-c).
7. Thread the fixture wire and fixture grounding wire through the collar, canopy, top loop, nipple(-c) and mounting strap.
8. Connect the other end of the chain with the top loop by using the other loop lock.
9. Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections using the wire nuts:
 - The smooth wire (marked) from the fixture to the black wire from the power source.
 - The ridged wire (unmarked) from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.
 Carefully tuck the wires back into the outlet box.
10. Attach the canopy to the mounting strap by inserting the top loop, then secure it with the collar.
11. Repeat the steps 9~11 for Light Kit.

Mounting Parts for Mini Chandelier

