




3-PERSON 2-IN-1 CONVERTING PATIO SWING WITH CANOPY

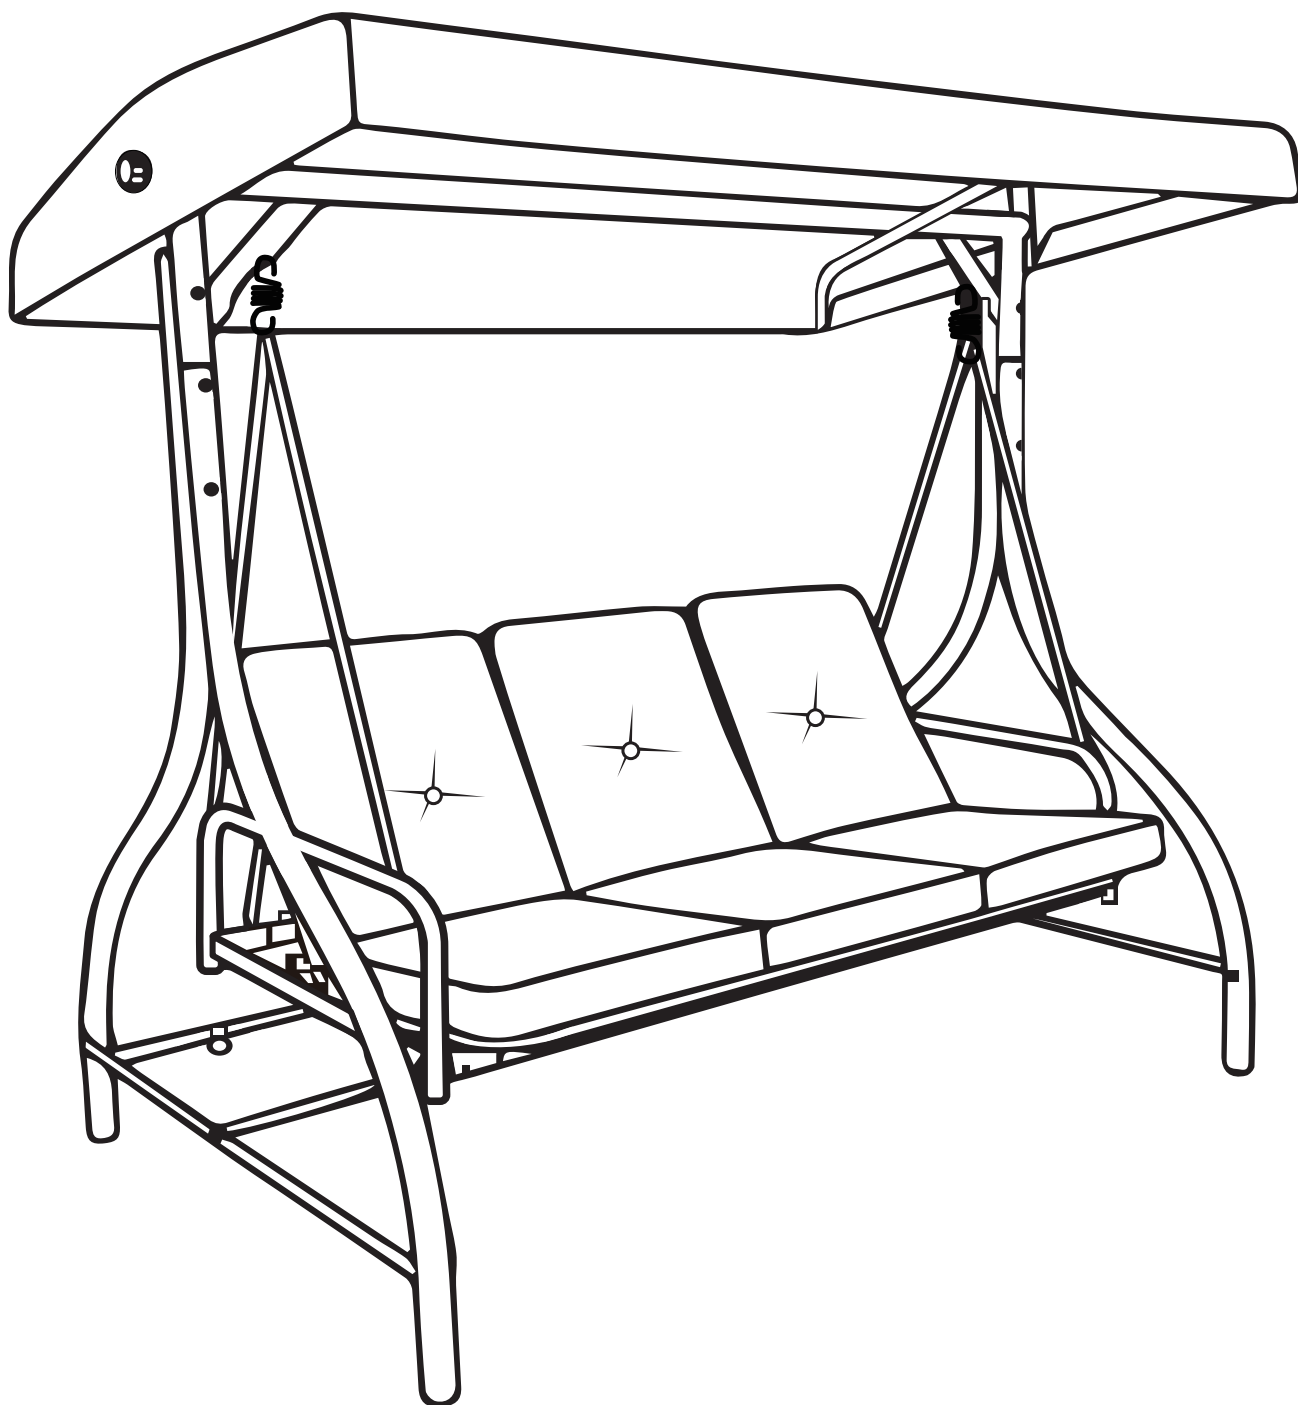

STOP

**MISSING A PART?
CALL US BEFORE GOING
BACK TO THE STORE**

The store where you made your purchase
Does not stock parts for this item.
If you have assembly questions or you are missing or
have damaged parts, please call

1-858-324-1911

(Mon - Fri, 10:00 am to 7:00 pm EST)

you can also e-mail customerservice@veikous.com


or visit www.veikous.com

Please prefer email contact. Due to busy lines,
there may be a wait for calls to be answered.


Please have the following information ready when you make your call:

- Model Number of the product located on the front of the assembly manual
 - Description of the part from the parts list
-
- Read entire assembly manual, paying special attention to the important tips and safety information .
 - Ensure there are no missing pieces by first separating and identifying all parts.
 - Make sure to check packing material for small parts that may have fallen out during shipment.
 - Structures are not intended for public use. The Company does not warranty any of its residential structures subjected to commercial use such as: Daycare, Preschool, Nursery School, Recreational Park, or any similar Commercial Application.
 - This manual contains helpful information concerning assembly preparation, installation procedure and required maintenance.
 - Always keep safety in mind as your structure is being built.
 - Keep these instructions for future reference.


HARDWARE LIST

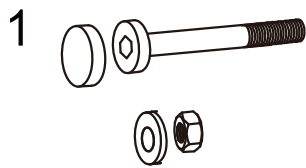


M8X100 Bolt
2PCS

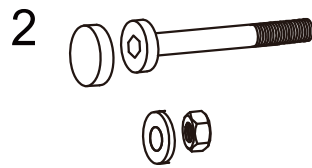


M8X98 Bolt
4PCS

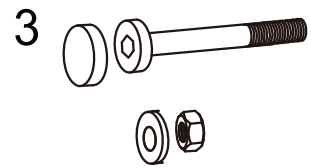


M8X75 Bolt
2PCS

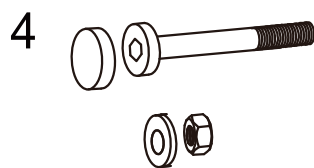


M6X60 Bolt
6PCS

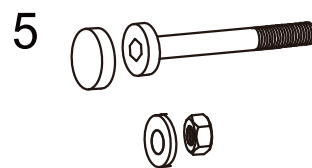


M6X40 Bolt
4PCS

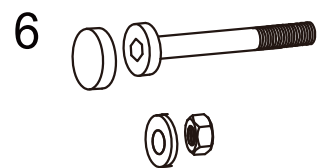


M6X35 Bolt
4PCS




M6X32 Bolt
6PCS

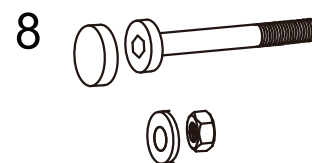


M6X30 Bolt
2PCS




Nut cover
24PCS



2PCS




2PCS



2PCS



















1PC





1PC

PARTS LIST

A  X1	B  X2	C  X2	
D  X2	E  X1	F  X1	
G  X1	H  X1	I  X1	
J  X1	K  X4	L  X1	
M  X2	N  X2	O  X1	P  X3



Step1 Assembling the swing frame

1. Attach the shorter leg(B) and the longer leg(C) on one side as shown below, and put one bolt(1) on the first top hole, two bolts(2) on the bottom two holes and then fasten all of them by using three nuts(9) at back.
2. Repeat the step to make sure you have the entire swing frame assembled ready on both sides.

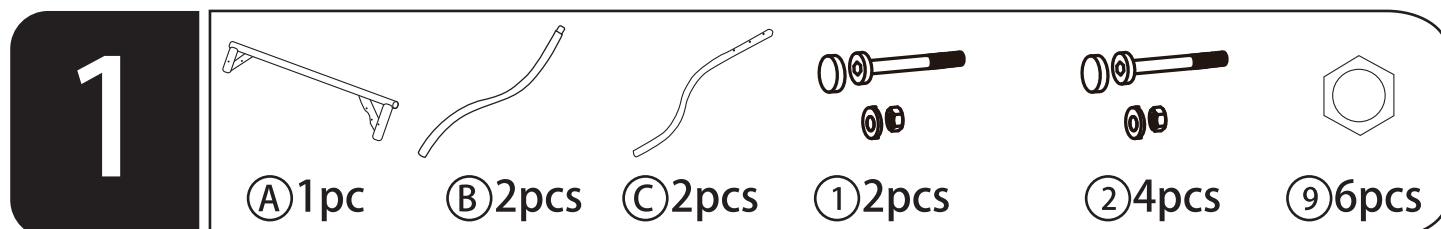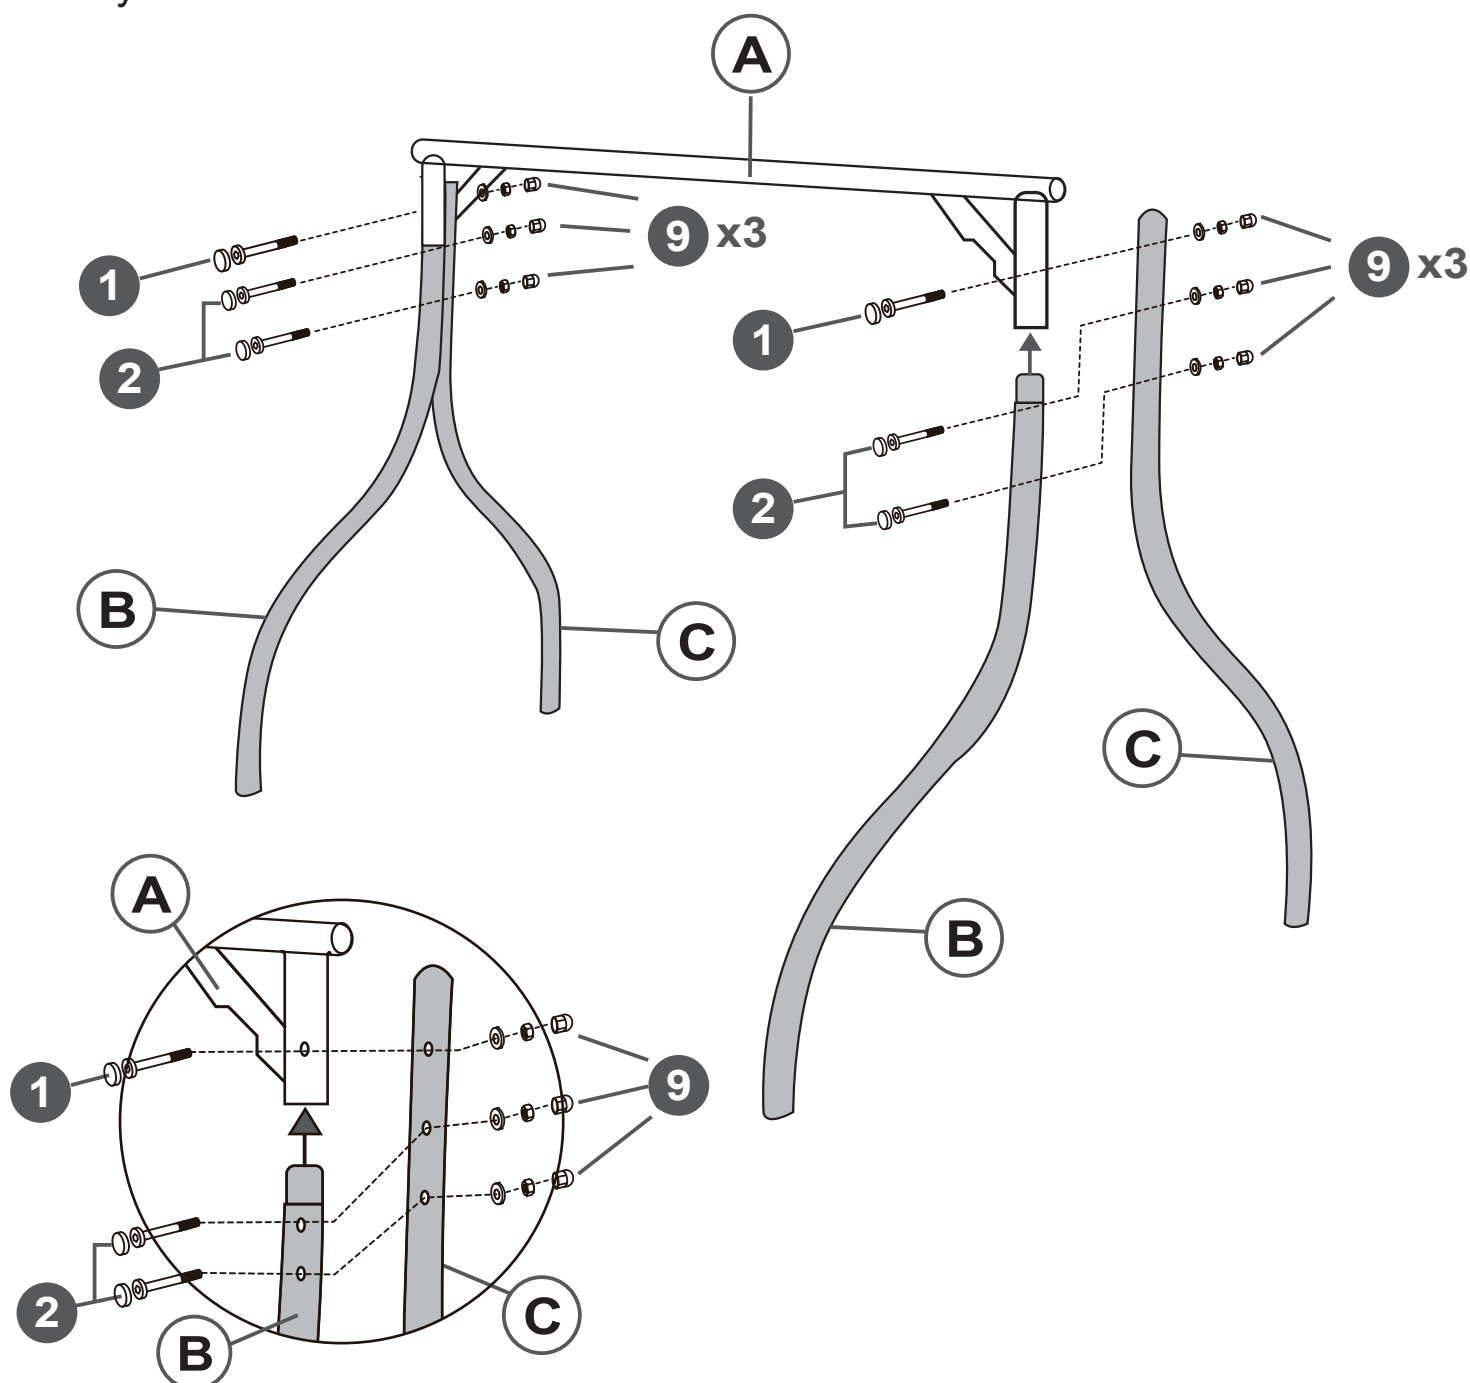



Step2 Assembling the swing frame support

1. Attach the support bar(E) in between to the legs(C) (the back of the swing), and then fasten it by using one bolt(4) and one nut(9) ONLY at the bottom hole on each side.(DO NOT do with the top hole now)
2. Attach two side bars(D) in between the leg(B) and leg(C) on both sides with four bolts(4) and four nuts(9). Now you can fasten the top holes of bar(E) by putting the bolt(4) across side bar(D) as shown below.

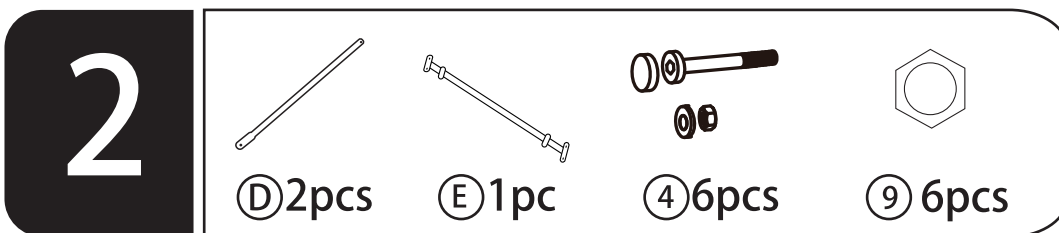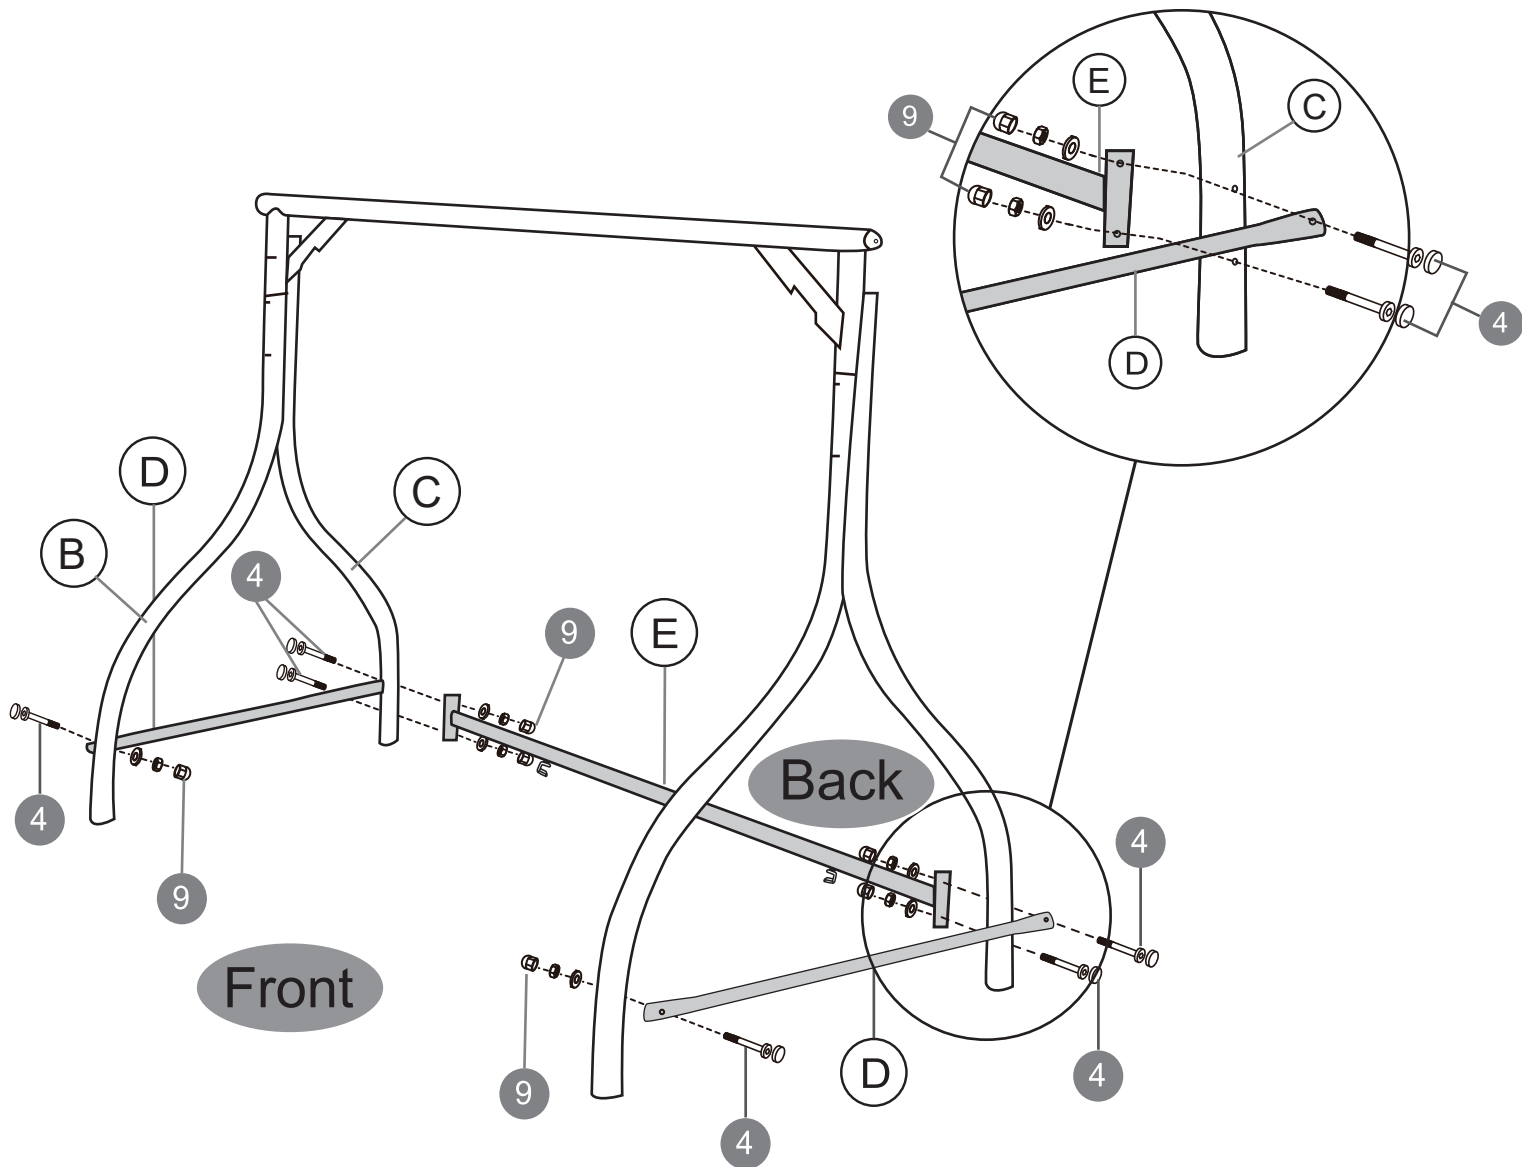


Step3 Assembling the swing frame support


Attach the bottom supporting bar(F) in between to the two side bars(D) with two bolts(8)and two nuts(9).

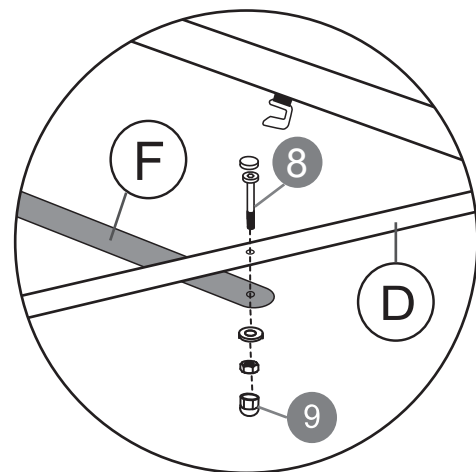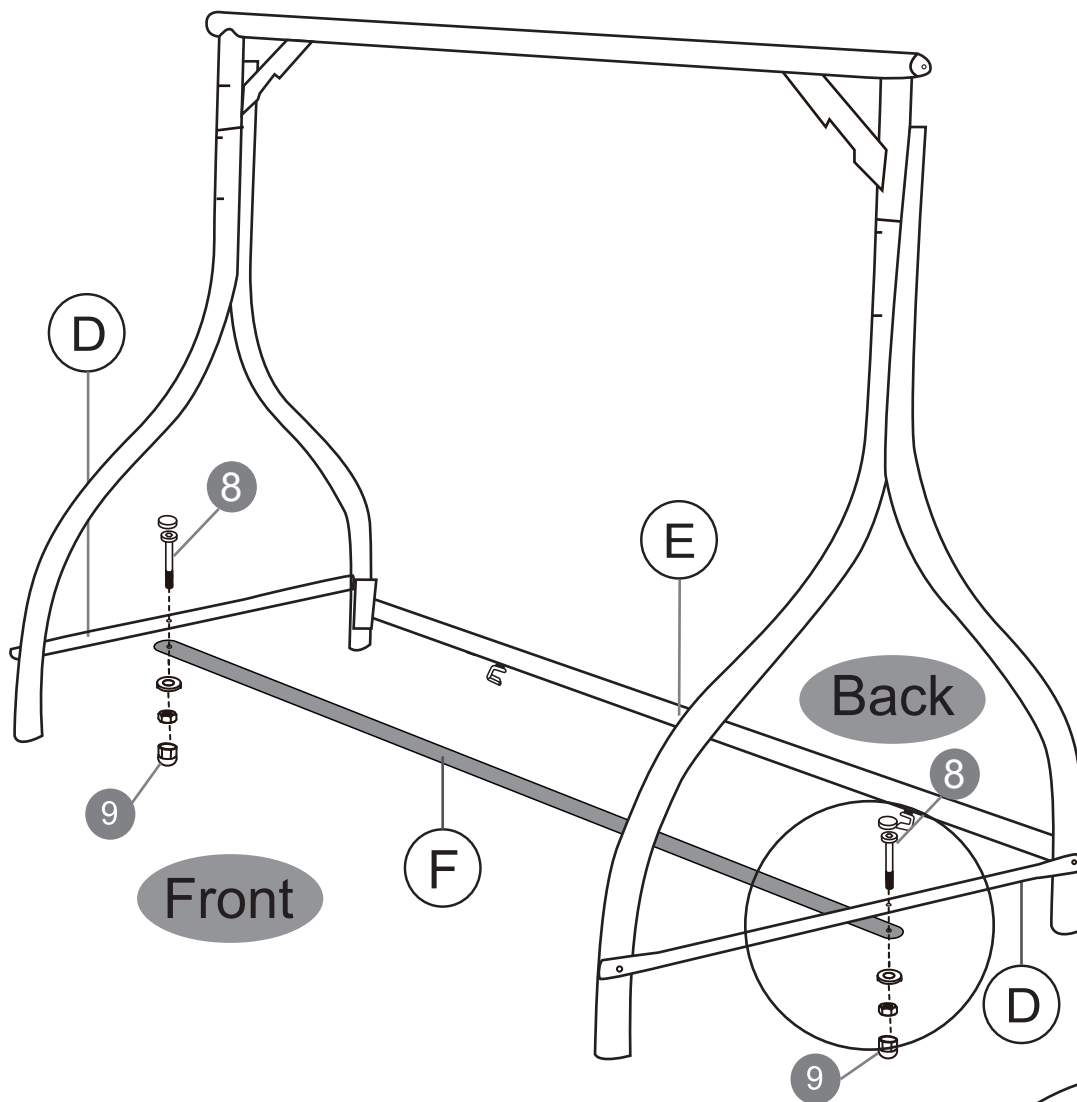

3



(F) 1pc




(8) 2pcs




(9) 2pcs

Step4 Assembling the seat frame

1. Insert the front bar(G) and rear bar(H) into the arm(J) and the arm(I), and then connect them with four bolts(6) and four nuts(9).
2. Attach the four swing pipes(K) to the arm(J) and the arm(I) using four bolts(5) and four nuts(9).
3. Connect the top of the two swing pipes using the spring hooks (10).

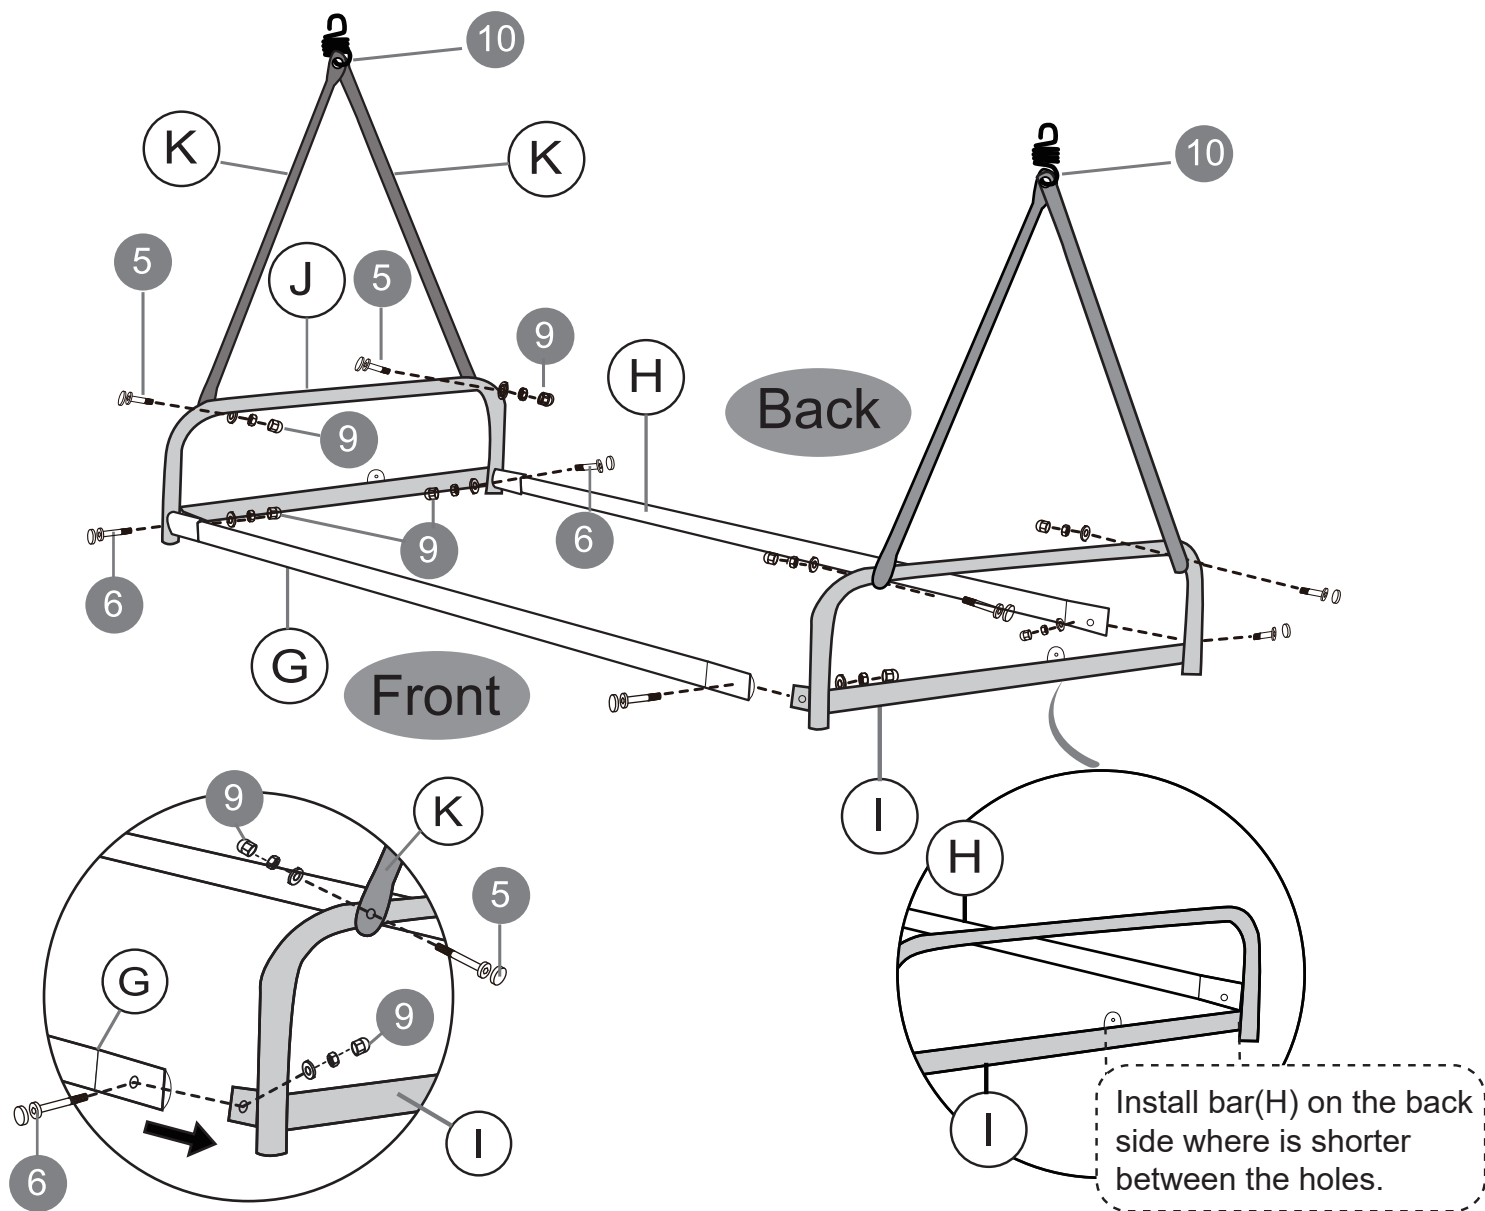


4

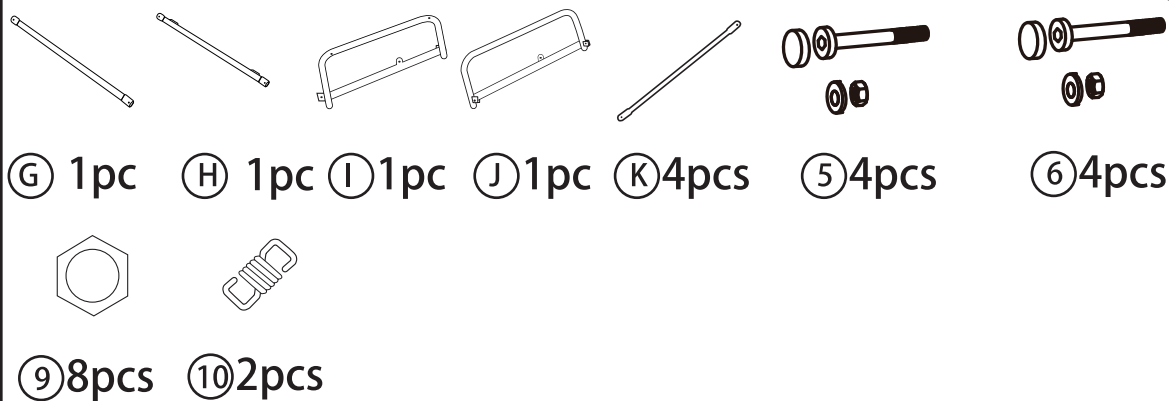


Step5 Assembling the seat

Connect the seat(L) to the arm(I) and arm(J) on both sides with two bolts(3), two nuts(9) and two plastic gaskets(11) as shown below.

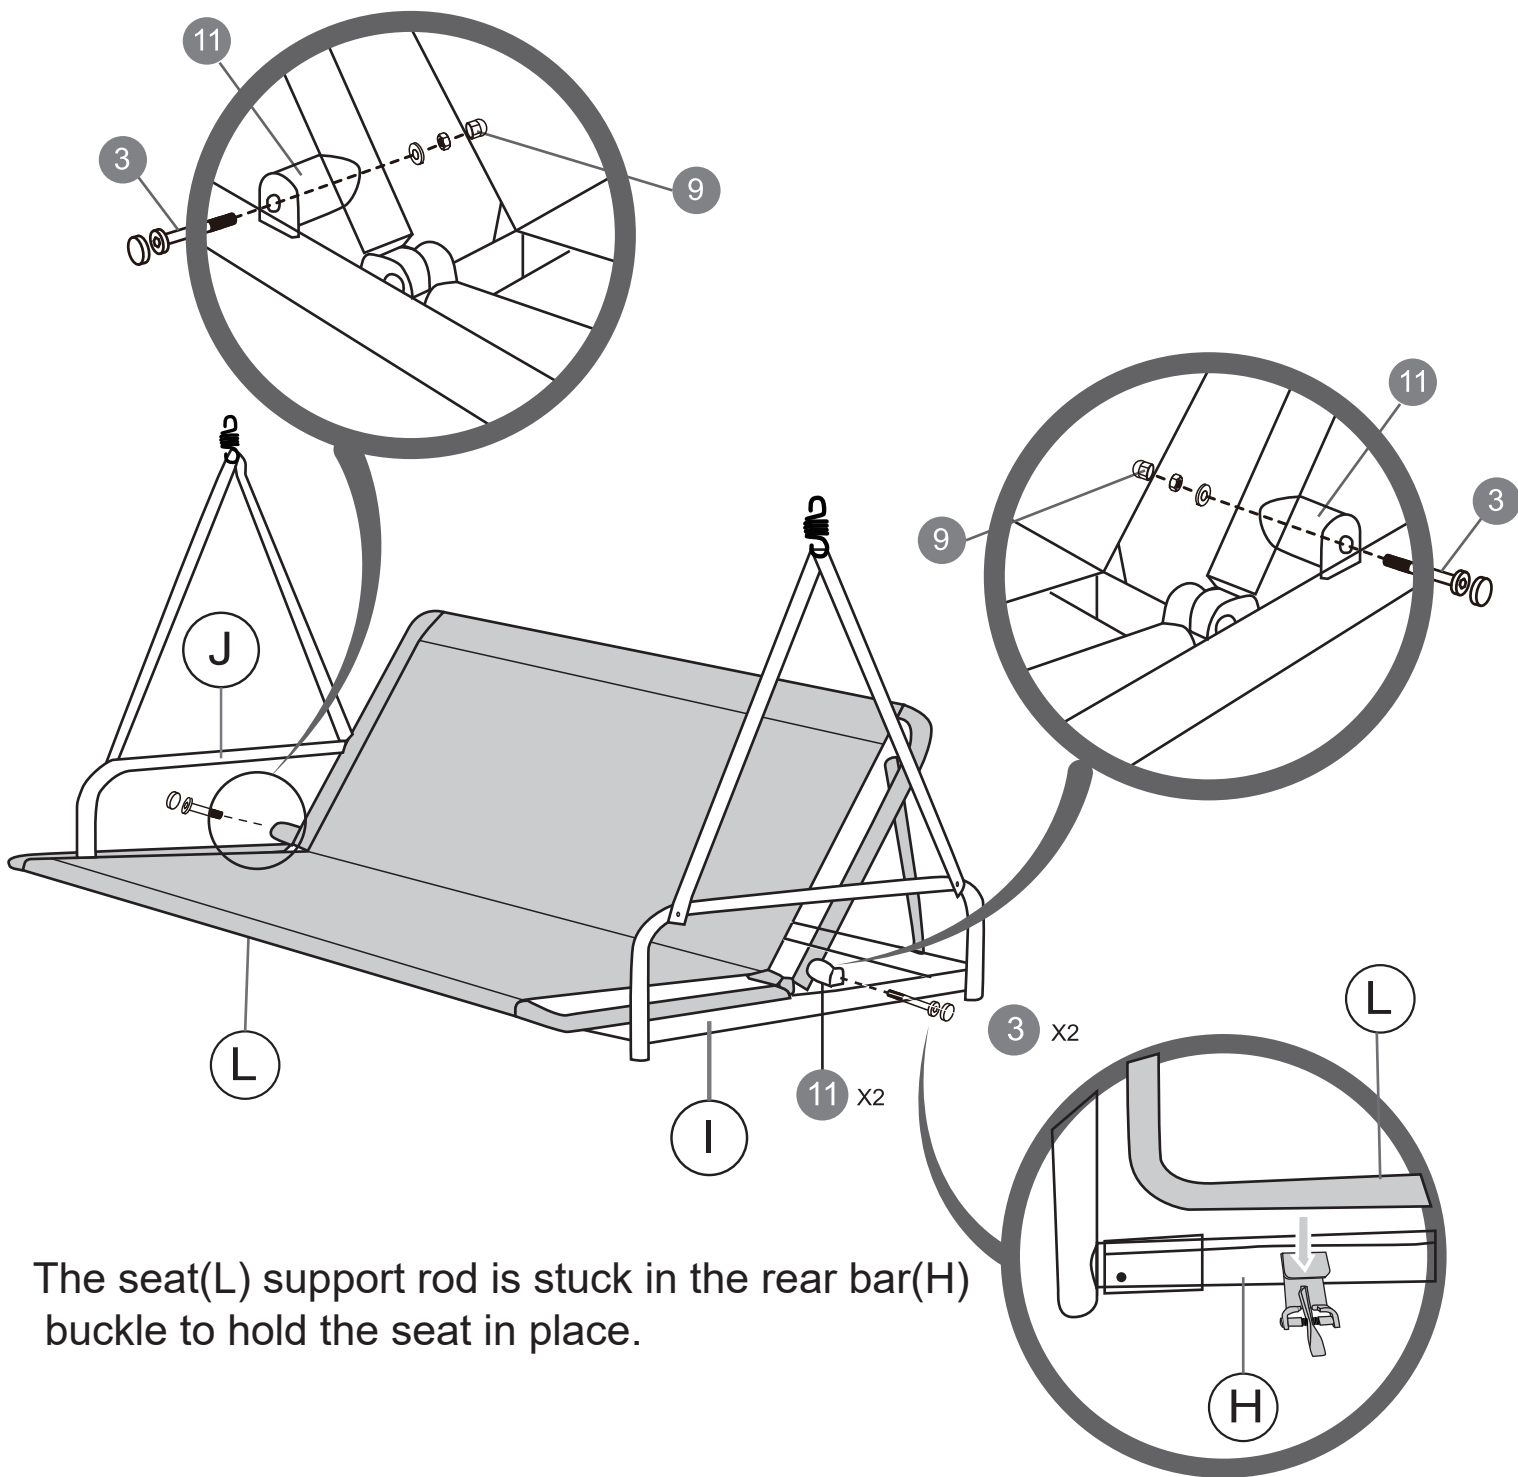


The seat(L) support rod is stuck in the rear bar(H) buckle to hold the seat in place.

5



①1pc



③2pcs




⑨2pcs




⑪2pcs

Step6 Assembling the canopy 1

Place the two supporting bars(N) across the canopy(O) as shown below.

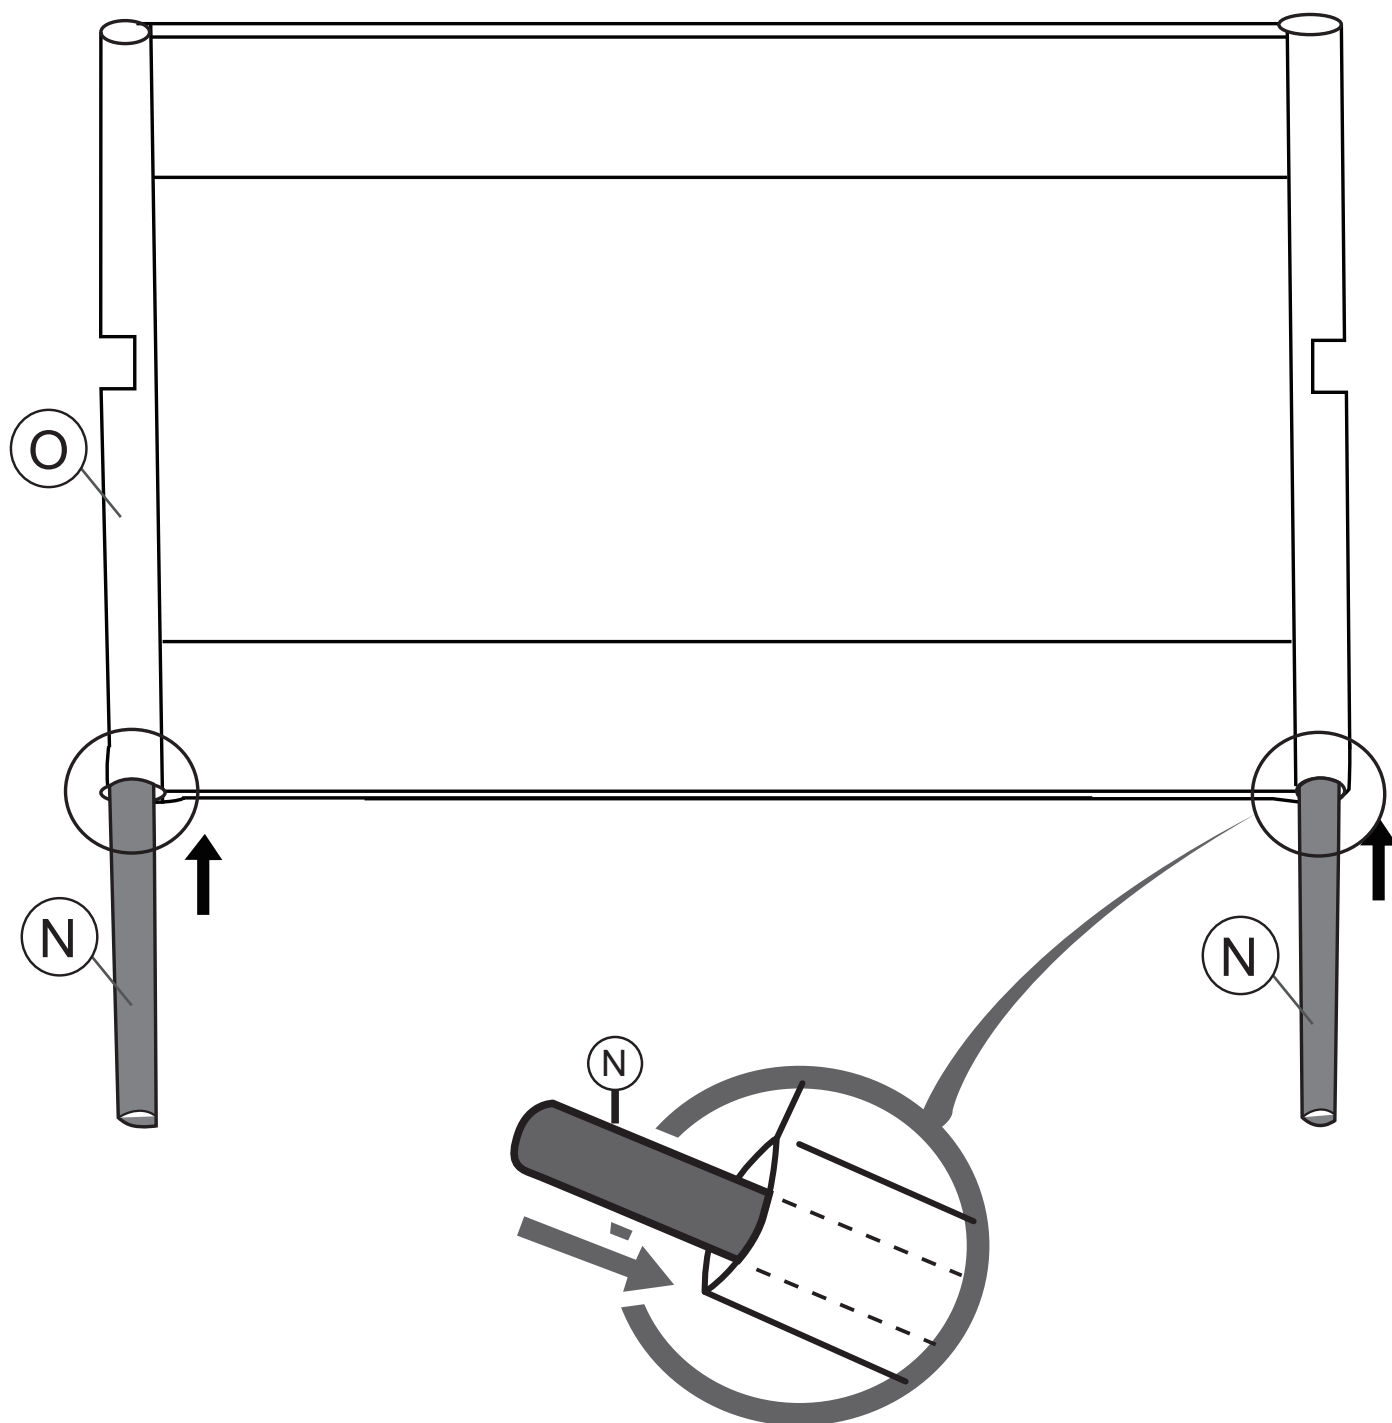

6





Ⓝ2pcs



⓪1pc


Step7 Assembling the canopy 2

- 1.Connect the bar(N) to the curved bar(M) with three bolts(7).
- 2.Repeat the step twice to make sure you get the whole canopy frame assembled.

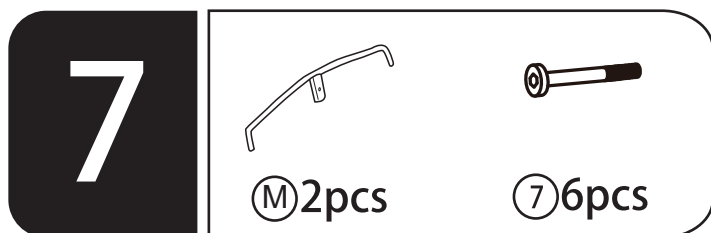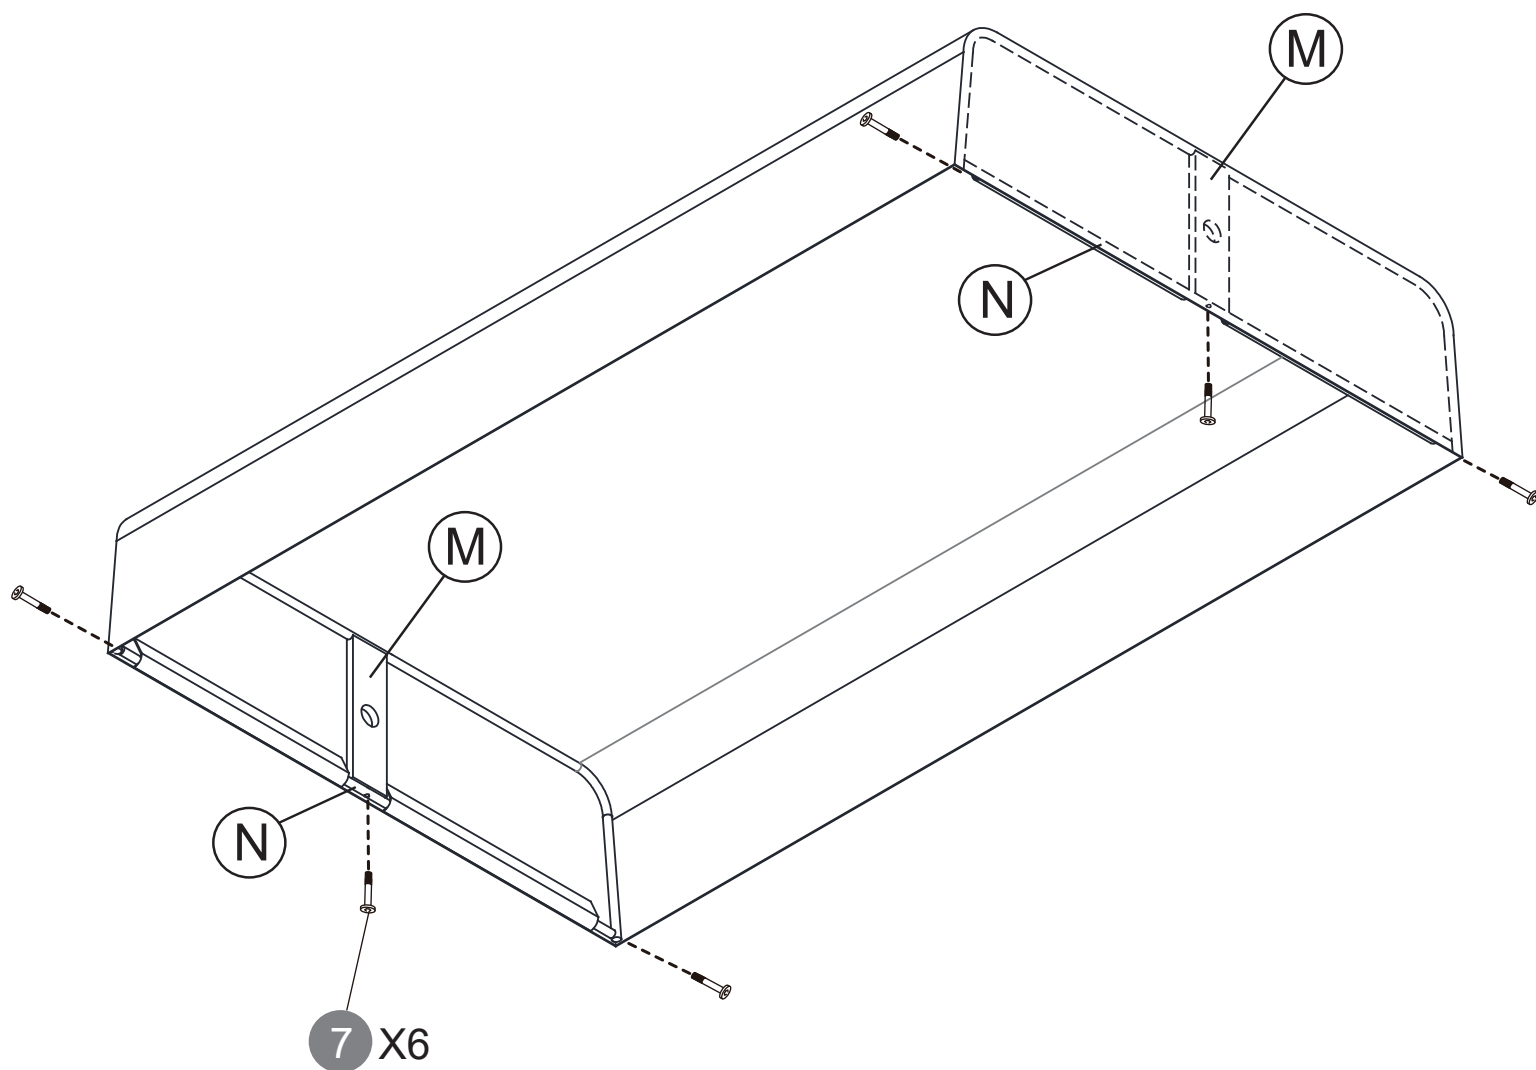

Step8 Assembling the canopy 3

1.Place the canopy(O) on the assembled top frame.Attach the top frame to the top bar using the screw knobs(12) on both sides.



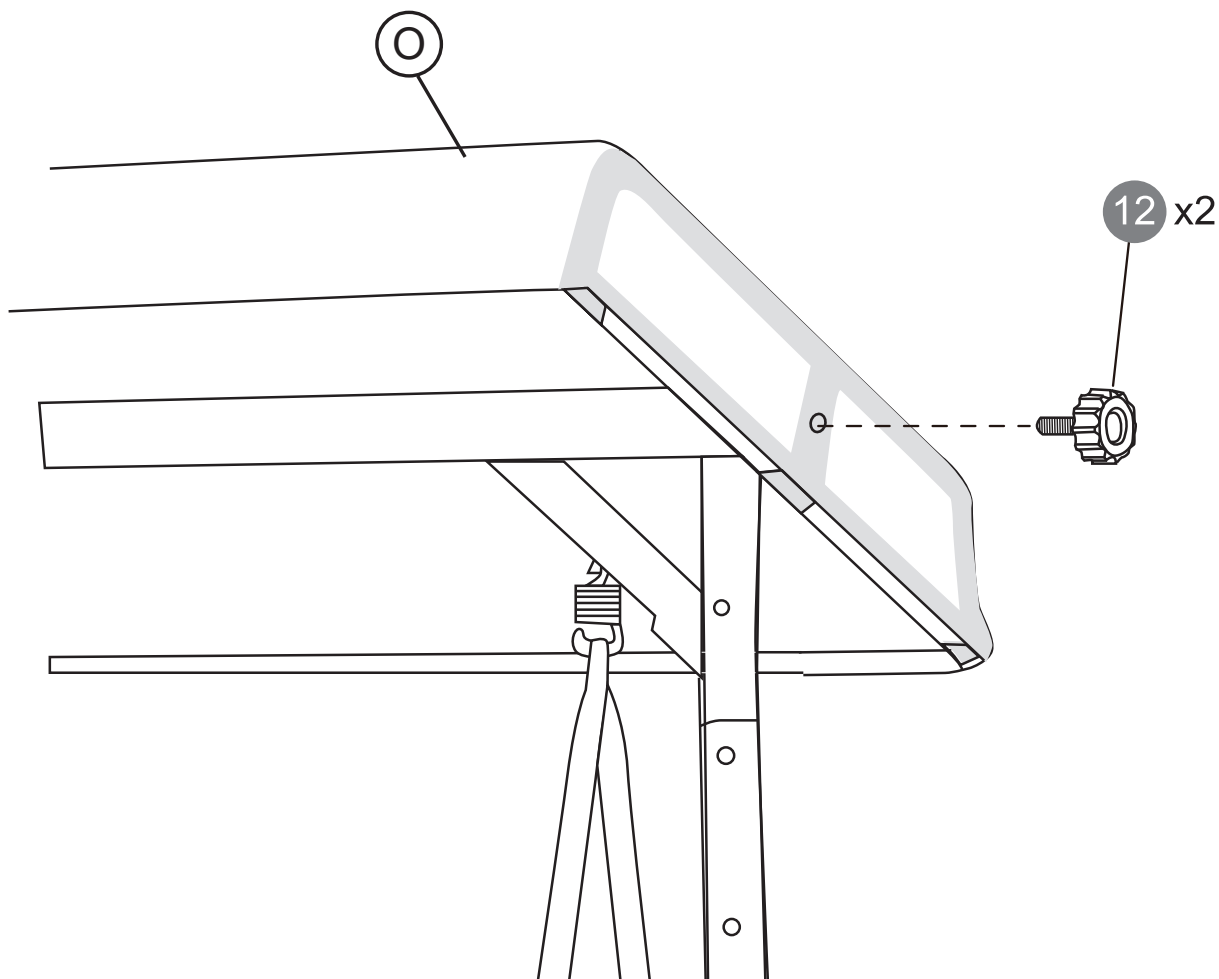


Another side is also assembled in the same way



Step9 Attaching the seat to the swing frame




1. Attach the assembled seat to the swing frame using the two spring hooks(10).
2. Place the three seat cushions(P) on the seat.

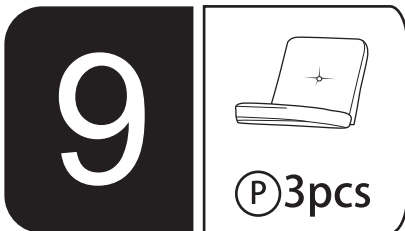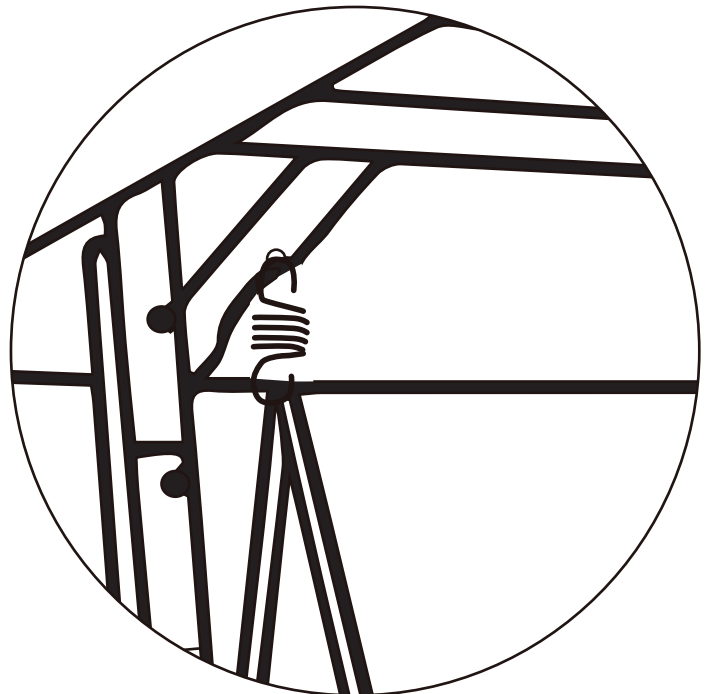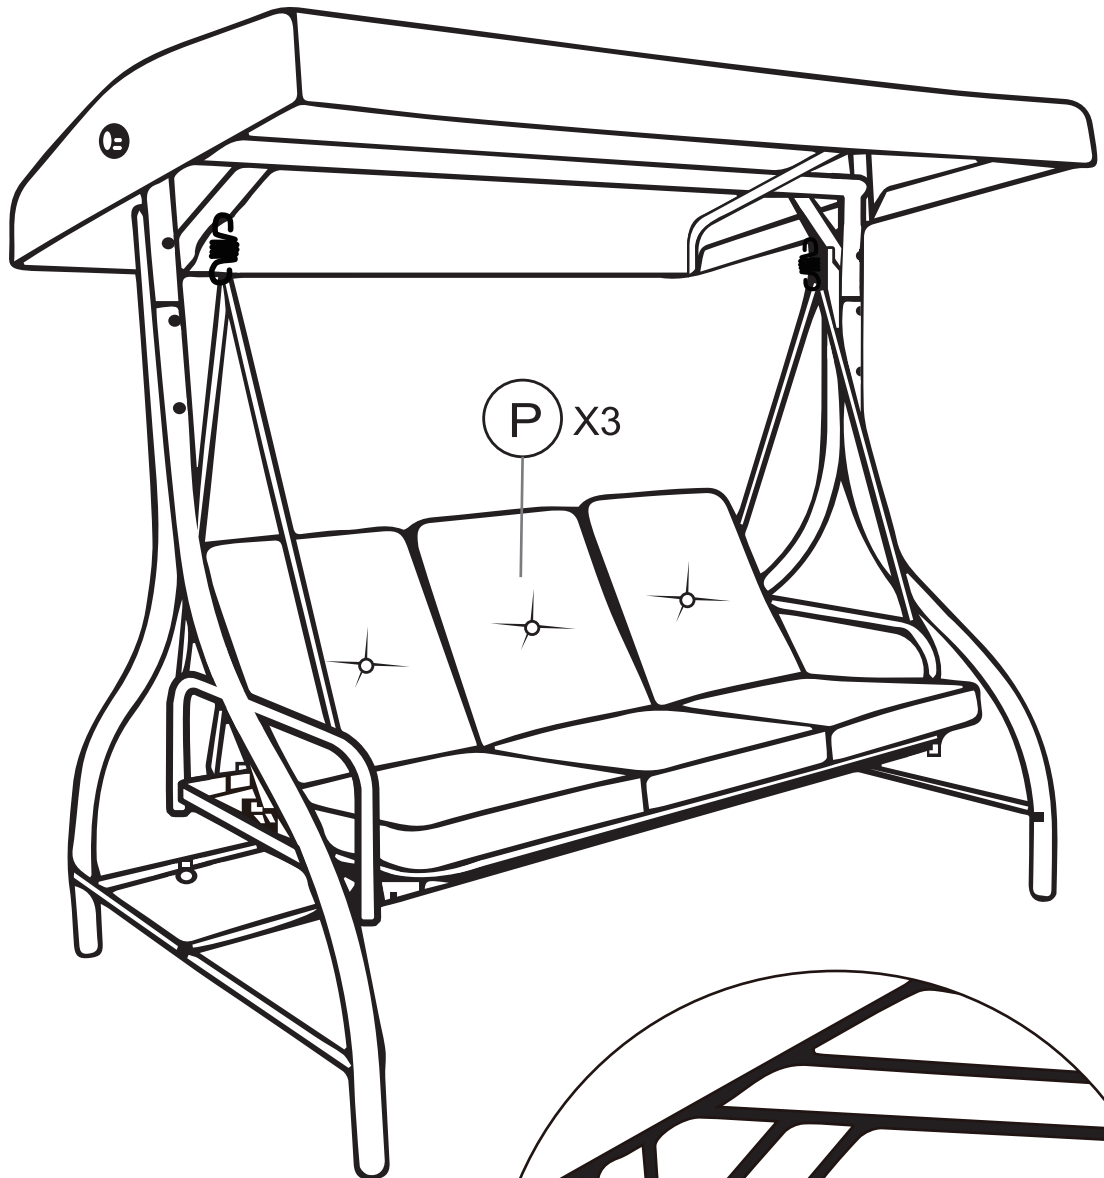

The product can be used in 2 ways


10

Patio swing as normal
with upright backrest.

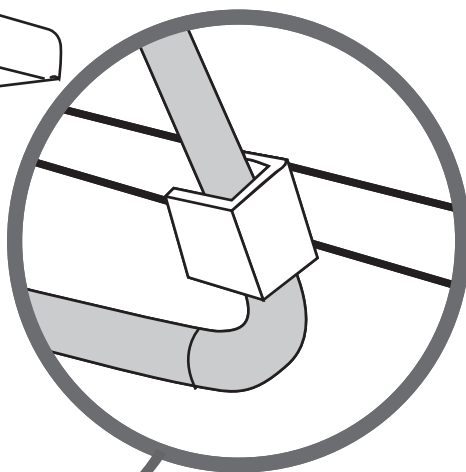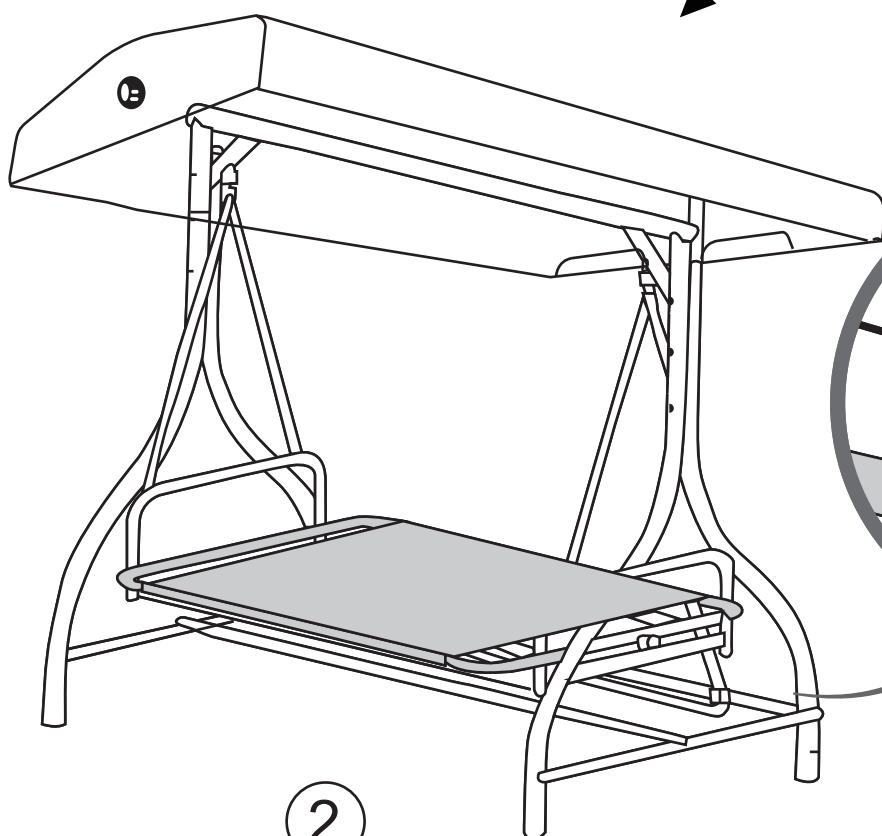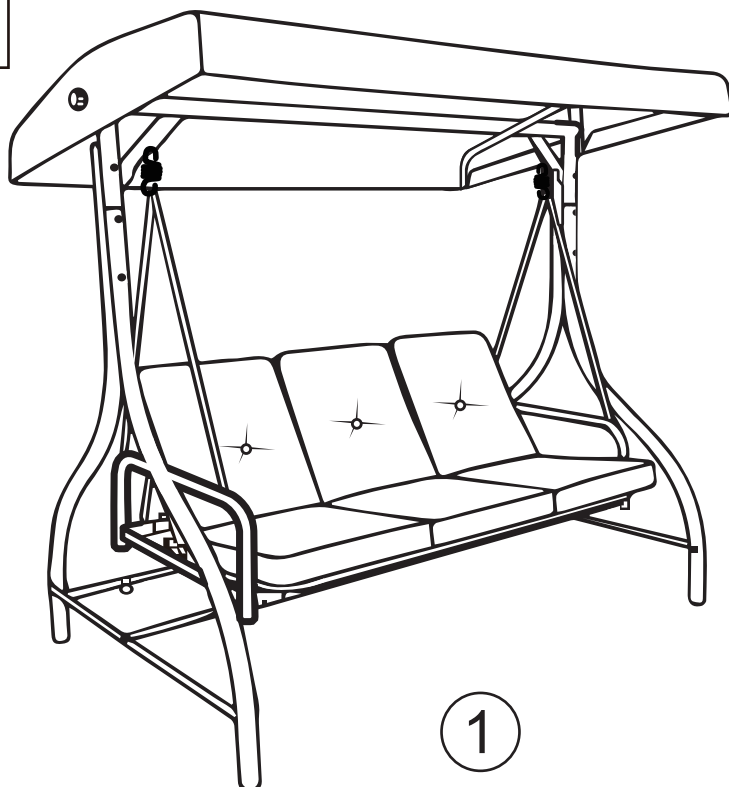

Laying down as a swing bed with the
back fixed to the rear supporting bar.

Enjoy your product!

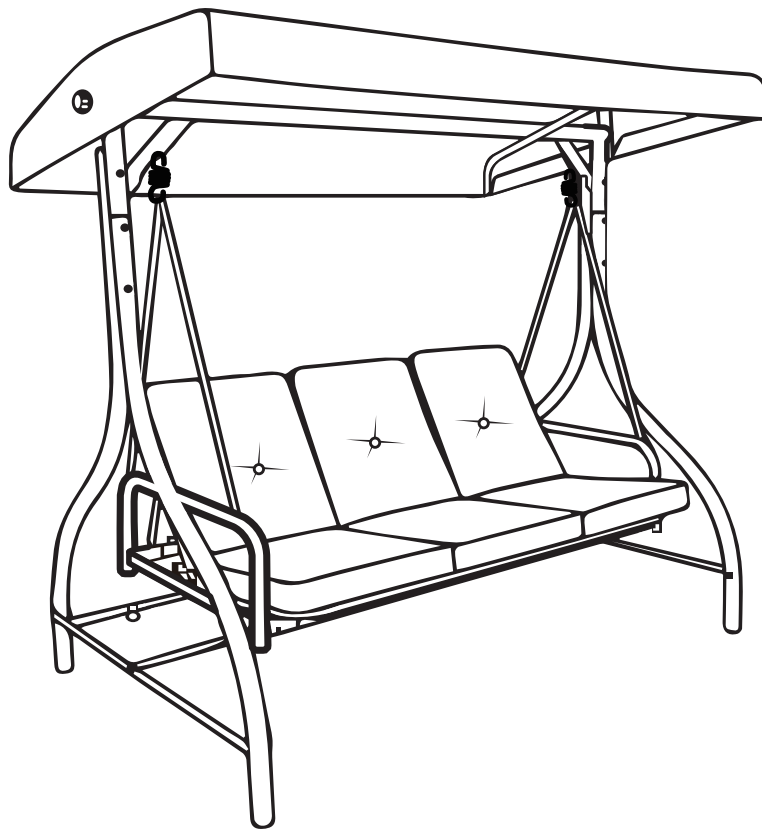

Note

1. Adjust the angle of the top frame and fully tighten the screw knobs for everytime you adjust the canopy.
2. Make sure to fix all cushions to the seat using ties in case they are blew away by wind.

Care and Cleaning

1. For best results, clean the swing with a damp cloth and dry thoroughly. This will help prevent mildew by removing dirt particles that may accumulate.
2. Do not clean with abrasive materials, bleach, or solvents.
3. Store the swing in a dry, sheltered place when not in use.
4. Keep the swing away from fire, extreme heat, freezing conditions, and inclement weather such as rain, hail, sleet, snow, or wind.