

STERLING®


A KOHLER COMPANY

ALL PRO®

Features

- Compression molded from our exclusive solid Vikrell® material
- Convenient shelving and acrylic towel bar on back wall
- Tongue-and-groove 4-piece modular design allows for easy "snap together" installation
- Durable swirl-gloss finish
- Caulk required for installation
- 10-year consumer/3-year commercial limited warranty
- 15" (38.1 cm) bath depth (floor to top of threshold)
- 60-1/4" (153 cm) x 31-1/2" (80 cm) x 74" (188 cm) complete unit rough-in dimensions include flange
- 60" (152.4 cm) x 30" (76.2 cm) x 72-3/4" (184.8 cm) complete unit finished dimensions

60" (152.4 cm) BATH AND WALL SURROUND
61040110
ALSO 61040120, 61040510, 61040520

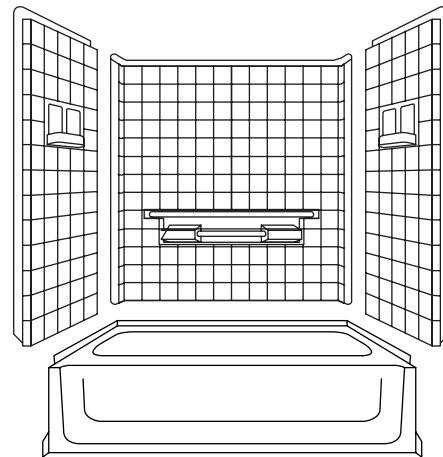

Codes/Standards Applicable

Specified model meets or exceeds the following:

- HUD, UM Bulletin 73A
- NAHB Research Foundation, Inc.
- ANSI Z124.1.2
- ASTM E162
- ASTM E662
- CSA B45

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Complete Unit Description	Colors/Finishes	
61040110	60" (152.4 cm) bath and wall surround, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
61040120	60" (152.4 cm) bath and wall surround, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
61040510	60" (152.4 cm) bath and wall surround, 5 pack, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
61040520	60" (152.4 cm) bath and wall surround, 5 pack, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Model	Wall Component Description	Colors/Finishes	
61042100	Back wall	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
61043110	Left end wall	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
61043120	Right end wall	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
61044100	Complete wall set	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
61044800	Complete wall set, specialty	<input type="checkbox"/> 0	
61045100	End wall set	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Technical Information

Fixture*:	shipping weight
Complete bath/shower	78 lbs (35.4 kg)
* Approximate measurements for comparison only.	

Fixture*:	water depth	capacity
To overflow	9-3/8" (23.8 cm)	44 gal (166.6 L)
* Approximate measurements for comparison only.		

Model	door maximum width	door maximum height
61040110	*57-1/2" (146.1 cm)	*NA
61040120		
61040510		
61040520		
* Varies with alternative walls		

Installation Notes

Install this product according to the installation guide.

Size the drain cutout to fit the drain assembly that will be used.

End stud positioning is critical if nailing-in flanges are to be used.

Double studding is recommended for pivot shower door installations.

Studs should be positioned roughly as shown for support clip or roofing nail installation.

