


Project		Catalog #		Type	
Prepared by		Notes		Date	

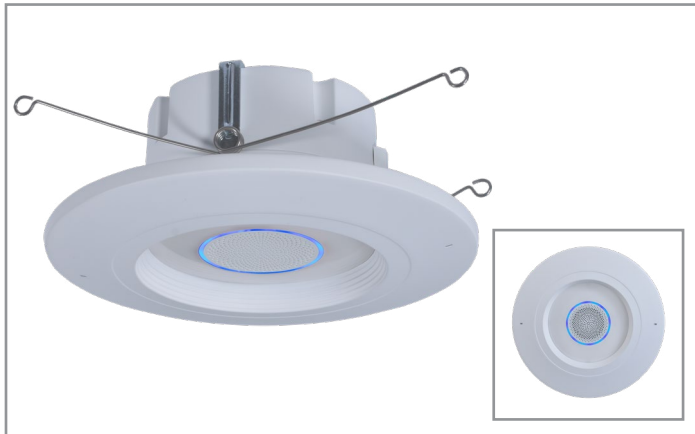

## HALO HOME

### RL56-HVA | VOICE

5/6-Inch Alexa Voice Integrated LED Retrofit Module

#### Typical Applications

Residential

#### Interactive Menu

- Order Information [page 2](#)
- Product Specifications [page 3](#)
- Energy & Performance Data [page 3](#)
- Product Warranty

#### Product Certification



-CA models only


#### Product Features



#### Top Product Features

- Amazon Alexa Voice integration
- Adjustable white tuning: 2700K - 5000K, 90 CRI
- Connect to the HALO Home Bluetooth Mesh network, no hub required
- Suitable for new construction, remodel and retrofit
- Certified for use with HALO 5" & 6" housings. Certified for use with other 5" & 6" housings

#### Dimensions

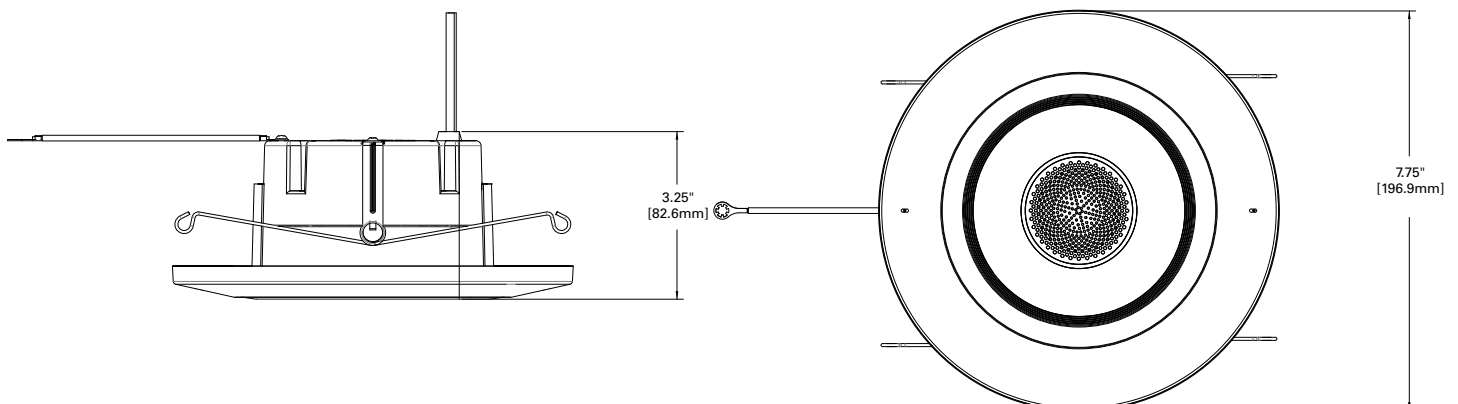

Kit Order Information

SAMPLE ORDER NUMBER: **RL56HVAHWB1**

Module	Kit Type
<b>RL56</b> = HALO Voice RL56 LED module	<b>HVAHWB1</b> = 5/6" Halo Voice + Bridge <b>HVAHIWAC</b> = 5/6" Halo Voice + Accessory + Bridge Kit

Order Information

SAMPLE ORDER NUMBER: **RL56069B4AWHVA**

Module	CRI/CCT	Protocol	Finish	Type	T24 Compliant
<b>RL5606</b> = HALO Voice RL56 LED module	<b>9</b> = 90 CRI minimum, white tuning, select CCT 2700K – 5000K, in the mobile app	<b>B4A</b> = Bluetooth Mesh wireless control, 4, 0, and Amazon Alexa Voice Services module	<b>W</b> = matte white baffle	<b>HVA</b> = Halo Voice Alexa	<b>-CA</b> = T24 Compliant

Housing Compatibility

Compatible Halo Incandescent E26 Screwbase Housings	
<p><b>Halo Standard Housings 5-inch</b></p> <p><b>H5ICAT</b>= 5" Insulated Ceiling, Air-Tite New Construction Housing  <b>H5RICAT</b>= 5" Insulated Ceiling, Air-Tite Remodel Housing  <b>H5ICATNB</b>= 5" Insulated Ceiling, Air-Tite New Construction Housing, No Socket Bracket  <b>H5T</b>= 5" Non-IC, New Construction Housing  <b>H5RT</b>= 5" Non-IC, Remodel Housing  <b>H25ICAT</b> = 5" Shallow, Insulated Ceiling, Air-Tite New Construction  <b>H25ICATNB</b> = 5" Shallow, Insulated Ceiling, Air-Tite New Construction, No Socket Bracket  <b>E5TAT</b>= 5" Non-IC, New Construction Housing  <b>E5RTAT</b>= 5" Non-IC, Remodel Housing  <b>H5TNB</b>= 5" Non-IC, New Construction Housing, No Socket Bracket  <b>E5TATNB</b>= 5" Non-IC, New Construction Housing, No Socket Bracket  <b>E5ICAT</b>= 5" Insulated Ceiling, Air-Tite New Construction Housing  <b>E5RICAT</b>= 5" Insulated Ceiling, Air-Tite Remodel Housing  <b>E5ICATNB</b>= 5" Insulated Ceiling, Air-Tite New Construction Housing, No Socket Bracket</p> <p><b>Halo Standard Housings 6-inch</b></p> <p><b>H7ICAT</b>= 6" Insulated Ceiling, Air-Tite New Construction Housing  <b>H7RICAT</b>= 6" Insulated Ceiling, Air-Tite Remodel Housing  <b>H7ICT</b>= 6" Insulated Ceiling, New Construction Housing  <b>H7RICT</b>= 6" Insulated Ceiling, Remodel Housing</p>	<p><b>H7ICATNB</b>= 6" Insulated Ceiling, Air-Tite New Construction Housing, No Socket Bracket  <b>H7ICTNB</b>= 6" Insulated Ceiling, New Construction Housing, No Socket Bracket  <b>H7T</b>= 6" Non-IC, New Construction Housing  <b>H7RT</b>= 6" Non-IC, Remodel Housing  <b>H7TNB</b>= 6" Non-IC, New Construction Housing, No Socket Bracket  <b>H7TCP</b>= 6" Non-IC, Chicago Plenum, New Construction/Remodel Housing  <b>H7UICAT</b>= 6" Insulated Ceiling, Universal, Air-Tite, New Construction Housing  <b>H27ICAT</b>= 6" Shallow, Insulated Ceiling, Air-Tite New Construction  <b>H27RICAT</b>= 6" Shallow, Insulated Ceiling, Air-Tite Remodel Housing  <b>H27T</b>= 6" Shallow, Non-IC, New Construction Housing  <b>H27RT</b>= 6" Shallow, Non-IC, Remodel Housing  <b>E27ICAT</b>= 6" Shallow, Insulated Ceiling, Air-Tite New Construction  <b>E27RICAT</b>= 6" Shallow, Insulated Ceiling, Air-Tite Remodel Housing  <b>E27TAT</b>= 6" Shallow, Non-IC, New Construction Housing  <b>E27RTAT</b>= 6" Shallow, Non-IC, Remodel Housing  <b>E7ICAT</b>= 6" Insulated Ceiling, Air-Tite New Construction Housing  <b>E7RICAT</b>= 6" Insulated Ceiling, Air-Tite Remodel Housing  <b>E7ICATNB</b>= 6" Insulated Ceiling, Air-Tite New Construction Housing, No Socket Bracket  <b>E7TAT</b>= 6" Non-IC, New Construction Housing  <b>E7RTAT</b>= 6" Non-IC, Remodel Housing  <b>E7TATNB</b>= 6" Non-IC, New Construction Housing, No Socket Bracket</p>

**RL56 Series LED Retrofit is UL Classified for retrofit in the follow 5/6" recessed housings:**

The RL56 Voice Series LED light module - trim combination is UL Certified for use with any 5/6" diameter recessed housing constructed of steel or aluminum with an internal volume that exceeds 107.9 in3 in addition to those noted above.

## Product Specifications

### Wireless System

- For use with the Halo Voice and Halo Home mobile apps.
- Wi-Fi module connects product to wireless network through the Halo Voice app. Sign-In to Amazon Account within the Halo Voice app for Alexa functionality.
- Bluetooth low energy (BLE) mesh allows on/off, white tuning and lumen output to be controlled wirelessly with companion wall switches, smart phones and tablets using Halo Home mobile application.
- Group, schedule, scenes and automate lighting actions through Halo Home mobile app.
- Bridge required to control the light with voice.
- Not compatible with Spotify, intercom, drop-in, or multi-room music features.

HALO Home products work better together. Smartphone will need to be within range to control a HALO Home device. Expand and strengthen the Bluetooth network range by adding more HALO Home devices. Visit [halohomesupport.eaton.com](http://halohomesupport.eaton.com) to learn more.

### Wireless Pairing

- See HALO Home Quick Start Guide for wireless setup, guidance and troubleshooting: [halohomesupport.eaton.com/downlight](http://halohomesupport.eaton.com/downlight)

### Module - Trim

- Module construction includes LED Array, heat sink, reflector, lens, baffle and trim ring.
- Regressed baffle
- Heat sink designed to conduct heat away from the LED Array, keeping the junction temperatures below specified maximums, even when installed in insulated ceiling environments.

### LED Array

- Mid power LED array provides a uniform source with high efficiency and no pixilation.
- 90 CRI minimum, R9 greater than 50
- Color accuracy within 3 SDCM at the CCT endpoints and 4 SDCM in between endpoints, provide color accuracy and uniformity.
- Color Temperature (CCT) has an adjustable range from 2700K to 5000K within the mobile app (factory default 3000K)
- 50,000 hour life

### Optical Assembly

- Regressed lens
- Impact-resistant polycarbonate
- Convex form and lamp-like appearance
- Diffuse for even illumination

### Driver

- Integral 120V 50/60 Hz constant current driver provides noise free operation
- Inline electrical quick connect and E26 adapter (provided in non California version) provides mains connections
- Consult instruction sheets and quick start guide for more information

### Dimming

- In the Halo Home mobile app, or through Alexa commands for continuous, flicker-free dimming from 100% to 5%.
- It is not recommended with any in wall dimmers.

### Retention

- Integral torsion springs for quick and secure installation

### Compliance

- UL Certified for US and Canada for use with Halo housings and other's housings
- EMI/RFI emissions per FCC 47CFR Part 15 consumer limits
- Contains no mercury or lead and RoHS compliant
- Photometric testing in accordance with IES LM-79-08
- Lumen maintenance projections in accordance with IES LM-80-08 and TM-21-11
- Can be used for State of California Title 24 high efficacy luminaire compliance. Complies with Title 24 JA8-2016-E.
- FCC ID - 2AKCY-RL56BLEHVA
- IC Code - 4706A-RL56BLEHVA

### Warranty

- Five year limited warranty, consult website for details. [www.cooperlighting.com](http://www.cooperlighting.com)

## Energy and Performance Data

### Standard Efficacy Versions

Catalog Number	Lumens	Watts	lm/W
RL56069B4AWHVA	827	12.5	66.2

## Lighting Facts

PRODUCT SPECIFICATIONS	
Brightness	827 lumens
Energy Used	12.5 watts
Lumens per Watt (Efficacy)	66.2
Color Accuracy	92
Light Color (CCT)	3000K
Correlated Color Temperature (CCT)	
	Color Temp Range
Performance metrics are measured at the factory setting; 3000K Las métricas de rendimiento se miden en la configuración de fábrica: 3000K	