


# HOTPOINT®

## HSWP1000M– Hotpoint® 3.5 DOE cu. ft. capacity ExtrAction™ ribbed basket

### Washer Dimensions (in inches)

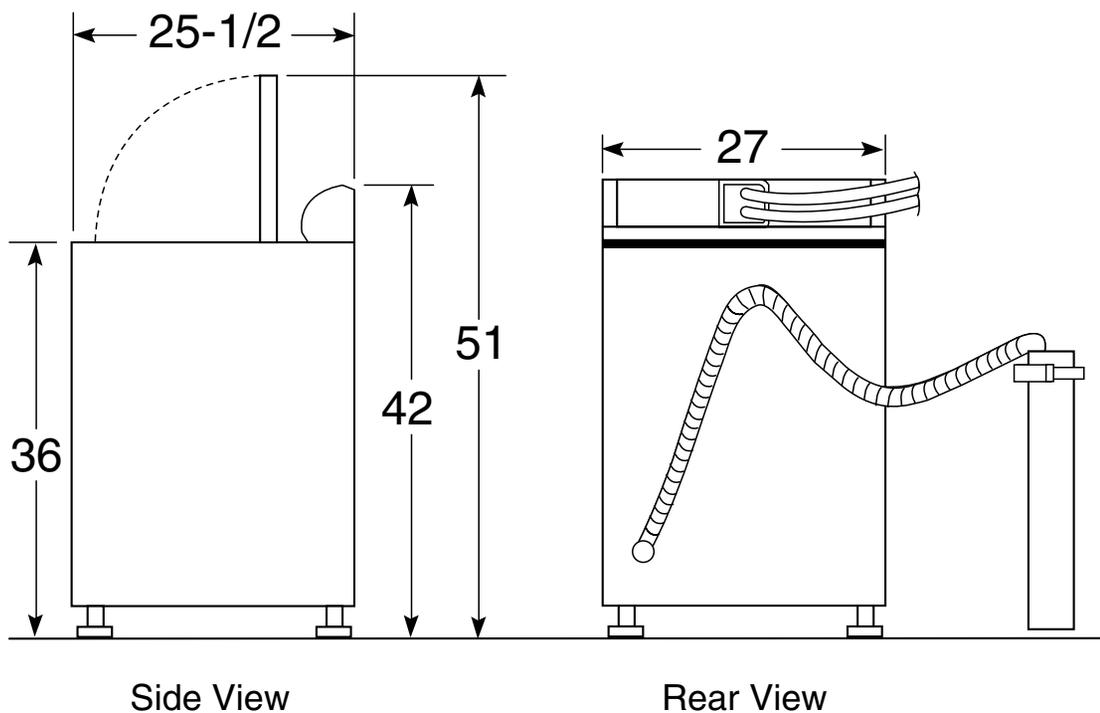

**Circuit Requirements:** An individual, properly-grounded branch circuit, with a three-prong grounding-type receptacle, protected by a 15 or 20 amp circuit breaker or a time-delay fuse, is required.


**Electrical Rating:** 115V, 60Hz, 10 Amps

**Installation Information:** Before installing, consult installation instructions packed with product for current dimensional data.

**Washer Note:** Washer wall outlet must be located within 36" of service cord entry. Wall outlet must not be located behind dryer.

# HOTPOINT®

## HSWP1000M– Hotpoint® 3.5 DOE cu. ft. capacity ExtrAction™ ribbed basket

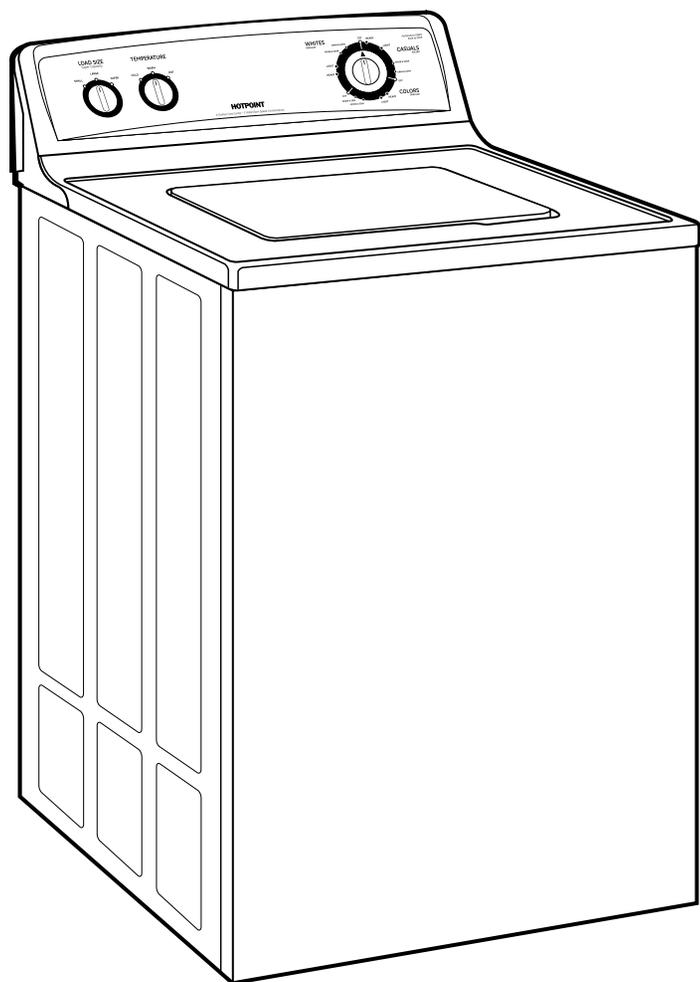

### Features and Benefits

- ExtrAction™ ribbed basket - Removes more moisture than smooth baskets
- Auto balance suspension system - Handles the heaviest loads without banging or walking, to help reduce noise
- Dual-Action Agitator - Provides gentle, dual-action wash
- 3 water levels - Allows user to match the water level to each load of wash
- 8 wash cycles - Multiple cycles are designed to specifically handle various fabrics and soils
- 3 wash/rinse temperatures - A variety of temperatures provide great wash results and longer fabric life
- 630 RPM spin speed - Fast speeds remove more water during the spin cycle to minimize drying time
- Model HSWP1000MWW – White on white