


ACE 300 CONTROL PANEL



QUICK START GUIDE

1. Power ON.

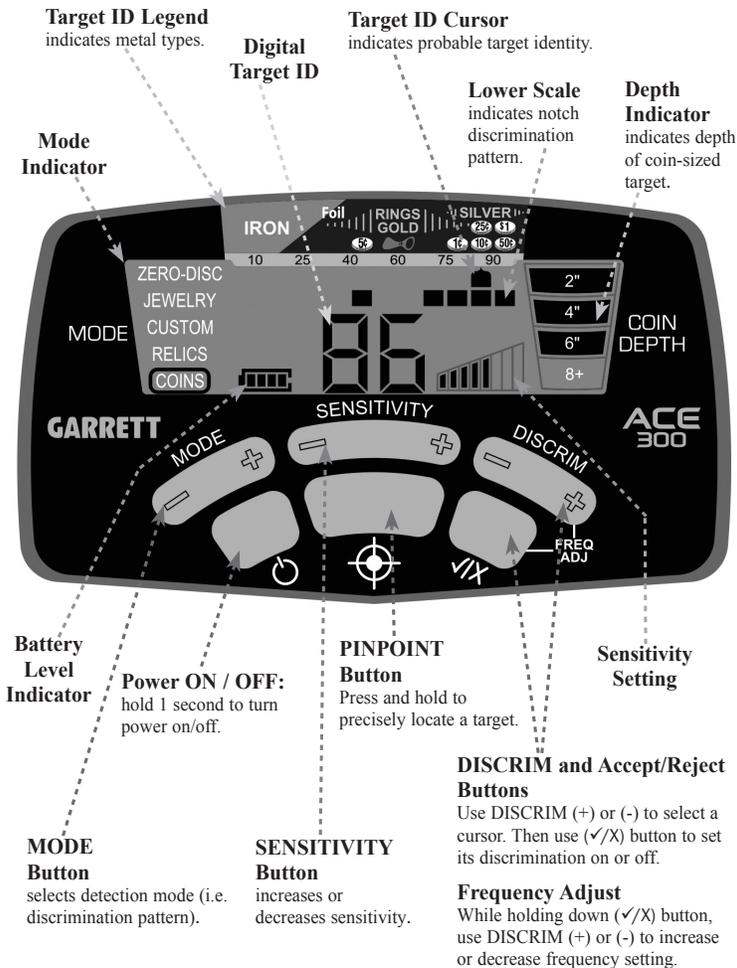

Press and release the ON / OFF Power button. The ACE 300 powers on in the last mode used, automatically adjusts for ground minerals and is ready to search. The detector operates with four (4) AA batteries which are already installed by Garrett. (Factory default mode is Coins.)

2. Select Mode.




Use the Mode button to select a different detection mode, when desired.

3. Adjust settings.

Adjust Sensitivity or Discrimination settings, if desired.

4. Begin scanning.

Lower the searchcoil to approximately 1 inch above the ground and scan the coil left and right at approximately 3 ft/second. The coil must be in motion for target detection, but can remain stationary during Pinpoint.

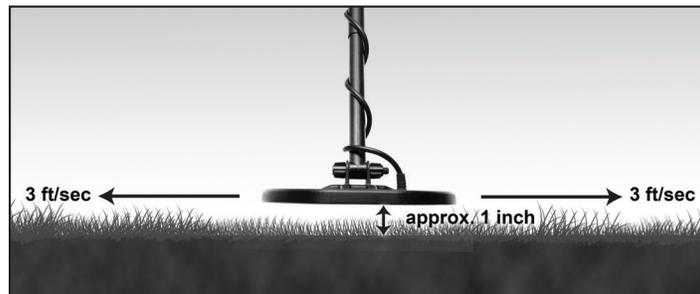


ACE 300 CONTENTS




If any part is missing, please contact Garrett Customer Service.

DETECTOR ASSEMBLY

Loosen lower camlock and extend lower stem. Insert mounting washers, connect searchcoil to stem as shown, and hand-tighten wing nut.

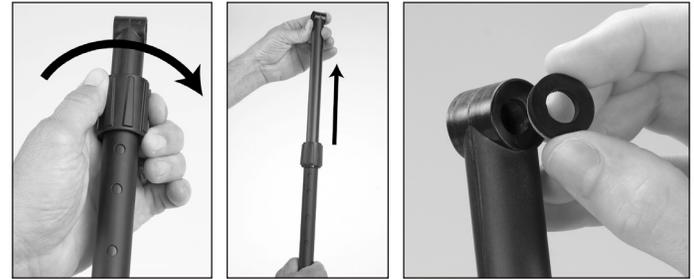

Loosen upper camlock, insert S-stem with control housing, adjust lower stem to comfortable length, and hand-tighten the camlocks. Wrap cable snugly around the stem with the first turn of the cable over the stem.

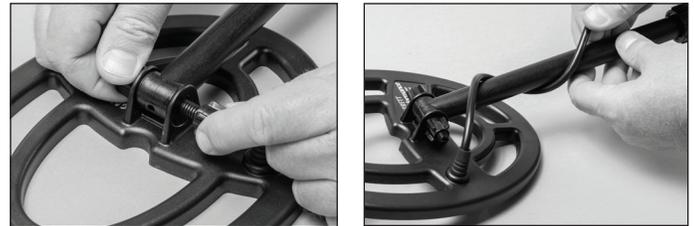

Note: The arm cuff can be adjusted by removing the screw on the bottom and moving it to the other hole.

