


	<b>Installation Instructions</b> Laminate Click-Lock Flooring For Assistance, Call: 1-877-630-1800 Homedepot.com/lifeproof	<b>Products Description</b> 12mm Click Hillcrest Oak Laminate Flooring	<b>Grade Levels</b> Above Grade / On Grade Below Grade	<b>Warranty</b> Lifetime Residential Warranty 7- year Commercial	<b>Installation Method</b> Glueless installation 48 hour acclimation required	<b>Model #HL1312</b> <b>Item # 1002707951</b>
---	--	---	--	--	---	--

 <b>WARNING: CALIFORNIA RESIDENTS:</b> This product can create wood dust and emit formaldehyde of which are known to the State of California to cause cancer.
--

<b>MANUFACTURER’S REQUIRED MINNESOTA DISCLOSURE -IMPORTANT HEALTH NOTICE:</b> SOME OF THE BUILDING MATERIALS USED IN THIS HOME (OR THESE BUILDING MATERIALS) EMIT FORMALDEHYDE. EYE, NOSE, AND THROAT IRRITATION, HEADACHE, NAUSEA AND A VARIETY OF ASTHMA-LIKE SYMPTOMS, INCLUDING SHORTNESS OF BREATH, HAVE BEEN REPORTED AS A RESULT OF FORMALDEHYDE EXPOSURE. ELDERLY PERSONS AND YOUNG CHILDREN, AS WELL AS ANYONE WITH A HISTORY OF ASTHMA, ALLERGIES, OR LUNG PROBLEMS, MAY BE AT GREATER RISK. RESEARCH IS CONTINUING ON THE POSSIBLE LONG-TERM EFFECTS OF EXPOSURE TO FORMALDEHYDE.  REDUCED VENTILATION MAY ALLOW FORMALDEHYDE AND OTHER CONTAMINANTS TO ACCUMULATE IN THE INDOOR AIR. HIGH INDOOR TEMPERATURES AND HUMIDITY RAISE FORMALDEHYDE LEVELS. WHEN A HOME IS TO BE LOCATED IN AREAS SUBJECT TO EXTREME SUMMER TEMPERATURES, AN AIR-CONDITIONING SYSTEM CANBE USED TO CONTROL INDOOR TEMPERATURE LEVELS. OTHER MEANS OF CONTROLLED MECHANICAL VENTILATION CAN BE USED TO REDUCE LEVELS OF FORMALDEHYDE AND OTHER INDOOR AIR CONTAMINANTS.  IF YOU HAVE ANY QUESTIONS REGARDING THE HEALTH EFFECTS OF FORMALDEHYDE, CONSULT YOUR DOCTOR OR LOCAL HEALTH DEPARTMENT.
---

 <b>CAUTION: ASBESTOS IN EXISTING FLOOR:</b> Lifeproof product does not contain asbestos. Existing installed resilient flooring and asphaltic adhesive may contain asbestos fillers or crystalline silica. Do not sand, dry sweep, dry scrape, drill, saw, bead-blast, or mechanically chip or pulverize existing resilient flooring, backing, lining felt, asphaltic “cutback” adhesive or other adhesive. See “Recommended Work Practices for Removal of Resilient Floor Coverings” (rfci.com) for detailedinformation and instructions on removing all resilient covering structures.
---

 <b>CAUTION: WOOD DUST:</b> Sawing, sanding and machining this product can produce wood dust. It can cause respiratory, skin and eye irritation. Avoid prolonged exposure to wood dust. Power tools should be equipped with a dust collector. If possible, perform wood dust generating activities outdoors. If high dust levels are encountered, use an appropriate NIOSH-designated dust mask.
---

**Safety and Health Precautions**

Power tools can be dangerous. Operate in strict accordance to manufacturer’s operating instructions and safety precautions. Unsafe and improper use can cause serious injuries. Avoid inhalation and exposures to wood dust by mechanical means and by wearing personal protective equipment. Wear appropriate personal protective equipment (PPE) which includes NIOSH or OASH-approved dust masks, safety goggles and work gloves.

**Warranty**

This flooring product comes with a manufacturer Lifetime Limited Residential and a 7-year Commerical Warranty. The warranty applies to the original purchaser of the flooring for the duration of the stated warranty from date of purchase. It guarantees the original purchaser that (1) the finish surface will not wear through, stain, or fade, and (2) the floor will resist damage due to moisture from general cleaning and water spills if removed within 24 hours.

**Pre-Installation**

**OWNER/INSTALLER RESPONSIBILITY**

The owner is advised to be at home during the installation for consultation/direction. The owner and installer should discuss installation and layout to maximize satisfaction. If this is not possible, consultation should be done prior to installation. Installers should be familiar with installation guidelines from National Wood Flooring Association (woodfloors.org). The owner/installer assumes all responsibility for product quality of completed installation.

PERFORM PRE-INSTALL INSPECTION. FOR CLAIMS PURPOSES, YOU ARE ALLOWED TO OPEN UP TO 4 BOXES FOR PRODUCT INSPECTION. DO NOT OPEN ALL THE BOXES. OPENING ALL THE BOXES CONSTITUTES YOUR ACCEPTANCE OF THE PRODUCT. INSPECT ALL THE PLANKS IN THESE 4 BOXES CAREFULLY. EXAMINE FLOORING FOR COLOR, FINISH AND QUALITY. IF YOU DISCOVER THAT PRODUCTS ARE DEFECTIVE, OR IF MATERIAL IS QUESTIONABLE, YOU SHOULD CONTACT THE RETAILER. IF YOU ARE SATISFIED, PROCEED WITH INSTALLATION. Prior to installation, arrange planks from several boxes to ensure even distribution of colors, shades and characteristics in the installed flooring.

Purchase flooring to be installed in one large area at the same time. Product purchased at a later time than the first purchase may vary beyond your expectations.

Accessories, trims and moldings are manufactured to coordinate with the varied appearances of the floor planks. Any exact matches are coincidental. Non-matching accessories are not defective products.

This product is manufactured according to strict quality standards. In the event that defects are discovered in the field, the industry standards permit a defect tolerance not to exceed 5%. Order an additional 5% extra for cutting wastage and grading allowances (10% for diagonal installations).

During installation, inspect the planks continuously. Defects that can be seen from a standing position should be cut off or held out. Installing defective planks implies acceptance.

Squeaking and clicking noises are the result of interactions among flooring, joists and subfloors when they move. Limiting the movements of the flooring system usually eliminates most of these noises. Sometimes, it is impossible to eliminate them completely and minor squeaking or clicking noises are to be accepted as normal flooring phenomenon.

Minor scratches can generally be repaired with the use of putty, stain or filler. It is an industry standard practice of flooring installation and it should be accepted as normal by the home owner.

To assure the warranty is not inadvertently voided, before proceeding with any activity that is not covered in this manual, please contact our Customer Support Team at 877-630-1800.

**CONCRETE SUBFLOOR REQUIREMENTS**

- Concrete subfloors must:
- Have minimum rated strength of 3000psi.
  - Be level to within 1/8 in. in a 6 ft. span or 3/16 in. in a 10 ft. span; no bumps or low spots. High spots can be removed by grinding; depressions can be filled with patching compound formulated for use in floor installation.
  - Be clean; no construction debris, soil, mud and any other objects on or adhering to the floor; if necessary,scrape and sweep away before the installation; no protrusions of nails, debris, metals should remain.
  - New concrete slab must cure for at least 60 days. It must have a minimum 10 mil polyethylene sheet between the ground and the concrete.
  - Be free from moisture related conditions which can damage the installed flooring.

**CONCRETE MOISTURE**

Test all concrete subfloors for moisture content and document the results. Visual checks are not reliable. Perform tests at locations around exterior doorways, near walls containing plumbing, near foundation walls and in the center of the room. Minimum sample size is 3 samples per 1000 sq. ft. of area and one test for every additional 1000 sq. ft. thereafter. Moisture content should meet one of the following criteria:

- 5% when tested using Tramex Concrete Moisture Encounter.
- Less than 3 pounds per 1000 sq. ft. per 24 hours when using Calcium Chloride test (ASTMF1869).
- 75% when using Relative Humidity Testing (ASTMF-2170).

<b>NOTE:</b> Concrete moisture content may be acceptable the time of the test. These tests do not guarantee a perpetual “dry” concrete slab. The concrete slab moisture content can vary at other times of the year. We are not responsible for moisture-related damage to installed flooring.
--

**WOOD SUBFLOOR REQUIREMENTS**

The subfloor must be clean; no presence of construction debris, soil, mud and any other objects on or adhering to the floor; no protrusions of nails, debris, or metals should remain. If necessary, scrape and sweep the subfloor before the installation.

The subfloor must be structurally sound and stable; no movements or squeaks; no loose panels or loose nails; no signs of ply de-lamination or other damages. Repair all shortcomings before installation.

The subfloor must be flat; no visible bumps or low spots; the subfloor should be flat to within 1/8 in. in 6 ft. span or 3/16 in. in 10 ft.. Test for moisture using a reliable moisture meter. Perform tests at locations around exterior doorways, near foundation walls, near walls containing plumbing lines and in the center of the room. Measure 20 locations per 1000 sq. ft. Moisture content of the subfloor should be less than 12%. Moisture content difference between the subfloor and flooring should be 2% or less.

**PLYWOOD OR ORIENTED STRAND BOARD (OSB) SPECIFICATIONS**

On truss/joist spacing of 16 in. (406 mm) O/C or less, the industry standard for single-panel subflooring is a minimum 5/8 in. (19/32 in., 15.1 mm) CD Exposure 1 plywood subfloor panels (CD Exposure 1) or 23/32 in. OSB Exposure 1 subfloor panels, 4 ft. x 8 ft. sheets. Expansion gap between panels should be 1/8 in. (3 mm). If panels are not tongued and grooved and there is not sufficient spacing or is inadequate, cutintherequiredspacingwithacircularsaw.Donotcutinexpansionspaceontongueandgroovepanels.

**PARTICLE BOARD OR FIBER BOARD**

Only for floating installation.

**Helpful Pointers**


- GENERAL TIPS**
- Make sure your work area is well lit. Good visibility ensures that color is consistent and that visually defective planks are detected and removed.
  - The remainder of the last plank can be used as a starter board on the following rows.The minimum length of the first and last plank needs to be longer then the width of the material being installed.
  - Using a shorter piece at under cut door jams will help when fitting flooring in place.
  - Never hit the flooring directly with the tapping block and be careful not to fracture floor edges.

**CUTTING THE LAST ROW TO WIDTH**

- Most often the entire length of the last row will need to be cut so that it is narrow enough to fit the remaining space.
- Measure the distance between the floor face edge (exclude the tongue) to the wall. Subtract [ 5/16 – 3/8 in.] from this measurement for expansion gap. Draw a line. Cut through the line. Discard the excess piece. Proceed with the installation.

**Preparing for Installation**

- 48 hour acclimation is required. Installation temperature range is 60°F - 80°F with a relative humidity (RH) of 35%-55%. Conditions in which the floor was installed should be maintained continuously thereafter.
- Ensure subfloors are clean. Lay out several cartons. Randomly arrange planks to ensure good color and shade mixture and end joint spacing. Inspect plank quality and grading Lay out trim moldings in advance and find planks whose shade closely matches. Set these aside for future use.
- Remove the existing base, shoe molding or threshold carefully. They can be used to cover the 5/16 – 3/8 in. expansion gap left around the edge of the room.
- Undercut doors and casings using a handsaw laid flat on a piece of scrap flooring.
- Install the underlayment (if used) parallel to the flooring according to the underlayment manufacture instruction. Any overlap (top) should be on the same side as the groove of the flooring so that the floor planks will slide smoothly into place. Tape all seams. Secure the underlayment material as necessary to prevent excessive movement.

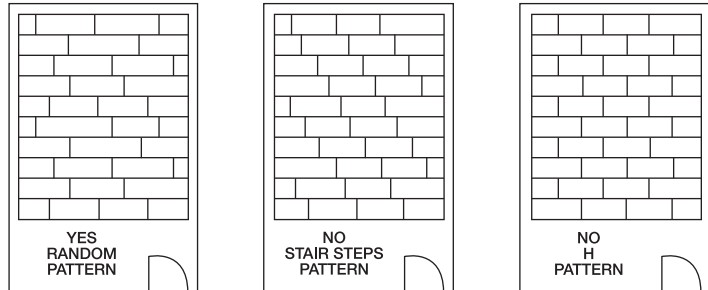

**Installation**

**1. INSTALLING THE FIRST ROW**

When starting the first row; remove the tongue from the width and length of the first plank. This is the starter plank that will guide the expansion gap between the plank and the wall around the perimeter of the area. Be sure to allow enough space for the 5/16-3/8in expansion.

Saw off the tongue from only the length of the remaining planks to be installed in the first row.

**2. INSTALLING THE SECOND AND REMAINING ROWS**

Install planks by angling them 35°-45° into the joint of the previous plank. Make sure the tongue is tightly engadged in the groove by applying balanced pressure in the direction of the groove. Use spacers or scrap pieces of flooring along the wall to maintain the expansion gap.

Make sure there is a random stagger at the end joints of at least 6in apart.

**3. USING A TAPPING BLOCK**

A tapping block is recommended to ensure there's no gapping in the installation process between rows. A tapping block protects the from the hammer and allows you to set it gentaly into the groove of the adjacent plank.







**4.EXPANSION GAP AND SPACERS**


Continue with the installation process. Ensure the expansion gap is maintained around the entire perimeter by using spacers.

**5.INSTALLING THE LAST ROW**

Use a pull bar to draw the last row to fit tightly to the previous row.

Once install is complete, use 100% silicon sealant around the perimeter of the installed flooring. Fill the expansion gap with compressable PE foam backer rod and cover with 100% silicon sealant.




	<b>Installation Instructions</b> Laminate Click-Lock Flooring For Assistance, Call: 1-877-630-1800 Homedepot.com/lifeproof	<b>Products Description</b> 12mm Click Hillcrest Oak Laminate Flooring	<b>Grade Levels</b> Above Grade / On Grade Below Grade	<b>Warranty</b> Lifetime Residential Warranty 7- year Commercial	<b>Installation Method</b> Glueless installation 48 hour acclimation required	<b>Model #HL1312</b> <b>Item # 1002707951</b>
---	--	---	--	--	---	--

Finishing Touches


- Finished the perimiter of the installed floor with 100% silicone sealant. Do not use acrylic sealant.
- Fill expansion 3/8" expansion gap with compressable PE foam backer rod and cover with 100% silicon sealant. Be sure expansion space is completly covered from edge to edge with no gaps.
  - When using molding accessories, apply 100% silicon to a portion of the molding or transtionon that will conctact with the lamiante flooring surface.
  - Wipe away any excess sealant imediately.
  - Apply 100% Silicon sealant at connection to doorframes or any other fixed objects.

Accessories


- Pictures are for general illustrative purposes only. Actual products may differ from diagrams.
- Clean the floor.
  - Use matching putty where necessary.
  - Install or reinstall all wall trim pieces. Nail them through the wall, but not to the subfloor to avoid restricting the expansion gap.
  - Install transition trim pieces. Nail them to the subfloor, not theflooring.
  - At doorways, transitions should be used to protect the edges of the floor and to provide a decorative transition from one floor type to another.
  - If the floor is to be covered, use a breathable material such as cardboard. Do not cover with plastic.




**T-Molding:** Used to create a transition between floor coverings of similar heights or to cover an expansion gap




**Stair Nose:** Used in conjunction with flooring installed on stair steps or finished edges of a higher level floor like in a sunken living room.




**Carpet Reducer (also called Baby Threshold or End Cap):** Used to transition floor coverings of differing heights. This reducer strip is also commonly used to border a fireplace, sliding glass door and other exterior door jambs.



**Hard Surface Reducer:** Used to transition to another hard surface flooring of different heights such as tile, vinyl, or concrete.



**Wall Base:** Used to give a finished look at the base of the walls. It can be used with or withoutquarter round.



**Quarter Round:** Used to cover the expansion space between the wall base and your flooring. It can also be used to make smooth transitions between the floor and cabinetry. It can be used with or without wall base molding.

Care and Maintenance

DAILY MAINTENANCE

- Sweep, dust, mop, or vacuum your floor regularly to remove any particles that could cause abrasion or scratch your floor.

**CAUTION:** Vacuums with a beater bar or power rotary brush head can damage a floor and should never be used.

- Use a damp mop to remove spots and soil. Apply appropriate cleaning solution to the cleaning cloth / mop. Do NOT apply directly to the floor.
- For lightly soiled areas, clean with distilled water.
- For moderately soiled areas, use a mild solution of isopropyl (rubbing) alcohol and distilled water. Dilute the mixture by mixing one part alcohol and 2 parts distilled water. For tougher spots, use a higher concentration of isopropyl alcohol and distilled water. For extreme cases, a solution of nail polish remover and distilled water can be used.
- HINT: For best results, clean the floor in the same direction of the planks. When the cleaning cloth/mop becomes soiled, rinse or replace it with a clean one. Following up with a clean, dry cloth will remove residual streak marks and spots.
- DO NOT** leave any amount of liquids (water, juice, soft drinks, spills, etc.) on the floor. Clean any wet spots immediately.
- DO NOT** use a steam cleaner.
- DO NOT** use a wet mop or douse the floor with water or liquid cleaners. Liquid can seep between the cracks and cause moisture damage.
- DO NOT** use any cleaning agents containing wax, oil or polish. Left over residue will form a dull film.
- DO NOT** use steel wool or scouring powder which will scratch the floor.

BRANDED OR OFF-THE-SHELF FLOOR CARE PRODUCTS  
If none of the above are effective and you choose to use a store bought product, test the product in a non-conspicuous area (i.e., closet, corner, or scrap pieces) for potential adverse side effects.

PREVENTATIVE MAINTENANCE

- Protect your floor when using a dolly for moving furniture or appliances. Protective sheets and/or plywood may be needed. Never slide or roll heavy furniture or appliances across the floor.
- Place protective pads beneath furniture legs and other heavy objects.
- Avoid excessive exposure to water from being tracked in during periods of inclement weather.
- Minimize abrasive material and dirt by placing mats on both sides of exterior doors and by using area rugs in high-traffic areas.
- Rearrange furniture and rugs periodically to avoid uneven color and shade changes from light exposure.
- Use protective mats beneath rolling chairs and keep furniture casters clean.
- Keep pets' nails trimmed.
- Remove shoes with cleats, spikes or exceptionally pointy heels before walking on the floor.

CLIMATE MAINTENANCE

- Care should be taken to control humidity levels within the 35%-55% range. Flooring, especially hardwood and bamboo, dimensions will be affected by varying levels of humidity.
- Dry Climates: Ahumidifier is recommended to maintain humidity levels. Wood stoves and electric heat tend to create very dry conditions during the winter months. This also will cause shrinkage inflooring.
- Humid, Wet Climates: By using an air conditioner, heater, or dehumidifier, proper humidity levels can be maintained to prevent excessive expansion due to high moisture content.

FLOOR REPAIR

- Very light and small surface scratches can be repaired with a staining "touch up" pen of the appropriate color.
- Slightly deeper scratches can be repaired by means of colored putty or stains. Fill the scratches with the putty. Level with putty knife. Wipe off excess putty.
- Very deep scratches may require the replacement of the planks.