

#### **H413608 HOPE FLUSH MOUNT**

#### ASSEMBLY AND MOUNTING INSTRUCTIONS

#### **GENERAL**

- WARNING-DISCONNECT POWER BEFORE RELAMPING OR WIRING THE FIXTURE. TURN OFF THE ENTIRE ELECTRICAL CIRCUIT TO WHICH THE LIGHTING FIXTURE IS ATTACHED
- INSTALLATION AND MAINTENANCE OF THIS FIXTURE SHOULD BE COMPLETED BY A LICENSED ELECTRICAN
- FAILURE TO INSTALL FIXTURE CORRECTLY COULD RESULT IN SERIOUS INJURY OR DEATH
- READ ALL INSTRUCTIONS BEFORE STARTING INSTALLATION.

- IF AN EXISTING FIXTURE IS BEING REPLACED, REMOVE IT AND NOTE TO WHICH WIRE IN THE OUTLET BOX THE ORIGINAL FIXTURE WAS ATTACHED.
- BEFORE DISCARDING THE CARTON DOUBLE CHECK THE PACKAGING TO MAKE SURE ALL PARTS HAVE BEEN FOUND.
- THIS FIXTURE WAS DESIGNED TO BE MOUNTED TO AN OCTAGON OUTLET BOX. THE BOX MUST BE SECURELY MOUNTED TO THE STRUCTURE OF THE BUILDING.

#### **INSTALLATION**

STEP 1.	Pull the wires out from the outlet box and install mounting	FAILURE T
	plate onto the outlet box by using the (2) mounting screws.	CORRECTI

- STEP 2. Fasten bare ground wire to ground wire from the wall outlet box (usually green or copper color) or connect ground wire to green screw on the mounting plate.
- STEP 3. Connect the neutral (white) fixture wire coming from the fixture base to neutral (usually white) outlet wire. Fasten both wires together with a plastic wire nut and tightly wrap the wire nut with electrical tape.
- STEP 4. Repeat the previous step with the hot (black wires). Make sure there are no exposed wires or strands that could cause a dangerous short circuit.

# FAILURE TO CONNECT THE APPROPRIATE WIRES CORRECTLY COULD RESULT IN SEROIUS INJURY OR DEATH!

- **STEP 5.** Carefully place connections back into the outlet box
- STEP 6. Lift the canopy up over the mounting plate and secure with
- STEP 7. Install the lamp(s). The fixture is rated for 60-watt type G25 lamp.

#### DO NOT EXCEED RECOMMENDED WATTAGE!

**STEP 8.** Restore power to the circuit at breaker or fuse-box.

## DIMMING

The fixture can be controlled by a wall dimming device. Only use triac/electronic dimmer. Make sure carton is marked for use with LED compact fluorescent-incandescent light source only. These can be

provided by your local electrical distributor, home center, or hardware store.


#### CLEANING

Please clean with a soft, dry cloth ONLY! Do not use cleaning products.



# **H413608 HOPE FLUSH MOUNT**

# ASSEMBLYANDMOUNTINGDIAGRAM

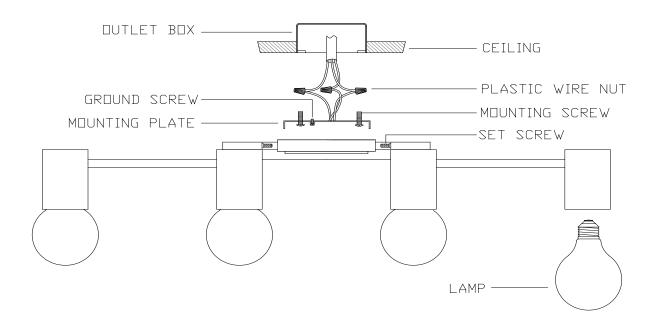

### WIRE NUT/TAPINGDIAGRAM

