

# Iron/Tones®

# Top-/Under-Mount Kitchen Sink K-6587

#### **Features**

- 21-inch minimum base cabinet width (top-mount applications).
- 24-inch minimum base cabinet width (under-mount applications).
- Acid-resistant enamel finish.
- Single bowl.
- Top-mount or under-mount.
- 20-7/8" (530 mm) x 20-7/8" (530 mm) (top-mount)

#### Material

KOHLER® enameled cast iron.

## **Recommended Accessories**

K-6539 Drainboard with Sink Rack

K-6377 Sponge Caddy

K-6378 Kitchen Brush Caddy

K-6379 Kitchen Squeegee

K-6382 Disinfecting Wipes Dispenser

K-6383 Soap Dispenser

K-8618 Paper Towel Holder

K-8619 Flexible Kitchen Mat

K-8624 Dish Scraper

K-3192 Sink Rack

K-5184 Sink Rack

# **Optional Accessories**

K-8801 Sink Strainer

## Components

Product includes:

52047 Clamp Accessory Pack, 4 Ea.



## Codes/Standards

ASME A112.19.1/CSA B45.2

# KOHLER® Enameled Cast Iron Kitchen Sink Lifetime Limited Warranty

See website for detailed warranty information.

## **Available Color/Finishes**

Color tiles intended for reference only.


Color	Code	Description
	0	White
	FF	Sea Salt™
	96	Biscuit
	47	Almond
	FD	Cane Sugar™
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	K4	Cashmere
	FT	Basalt
	58	Thunder™ Grey
	20	Suede
	KA	Black 'n Tan
	FP	Caviar
	7	Black Black™





# Iron/Tones®

# Top-/Under-Mount Kitchen Sink K-6587

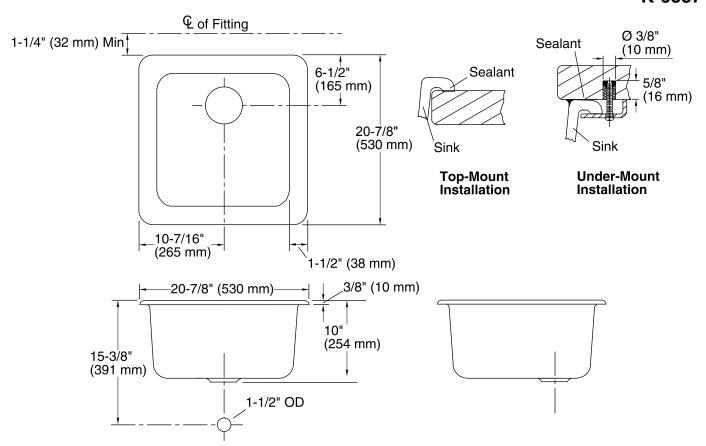

### **Technical Information**

All product dimensions are nominal.

Bowl configuration: Single

Installation: Top-mount, Under-mount Bowl area: Length: 18" (457 mm) Width: 18" (457 mm)

Bowl depth: 9-1/2" (241 mm)

Drain hole: 3-7/8" (98 mm)

114335-7, required, included Template:

#### **Notes**

Install this product according to the installation instructions.

Supplied bowl clamp assemblies require 1" (25 mm) minimum countertop thickness. Installer must supply hardware for thinner countertops.

For multiple bowl under-mount installations, a minimum distance of 3-3/8" (86 mm) is required between bowls. Countertop supplier to determine

required support.

