


MAKE WORK FLY

Eagle™ 10,000 Plus

KOHLER.

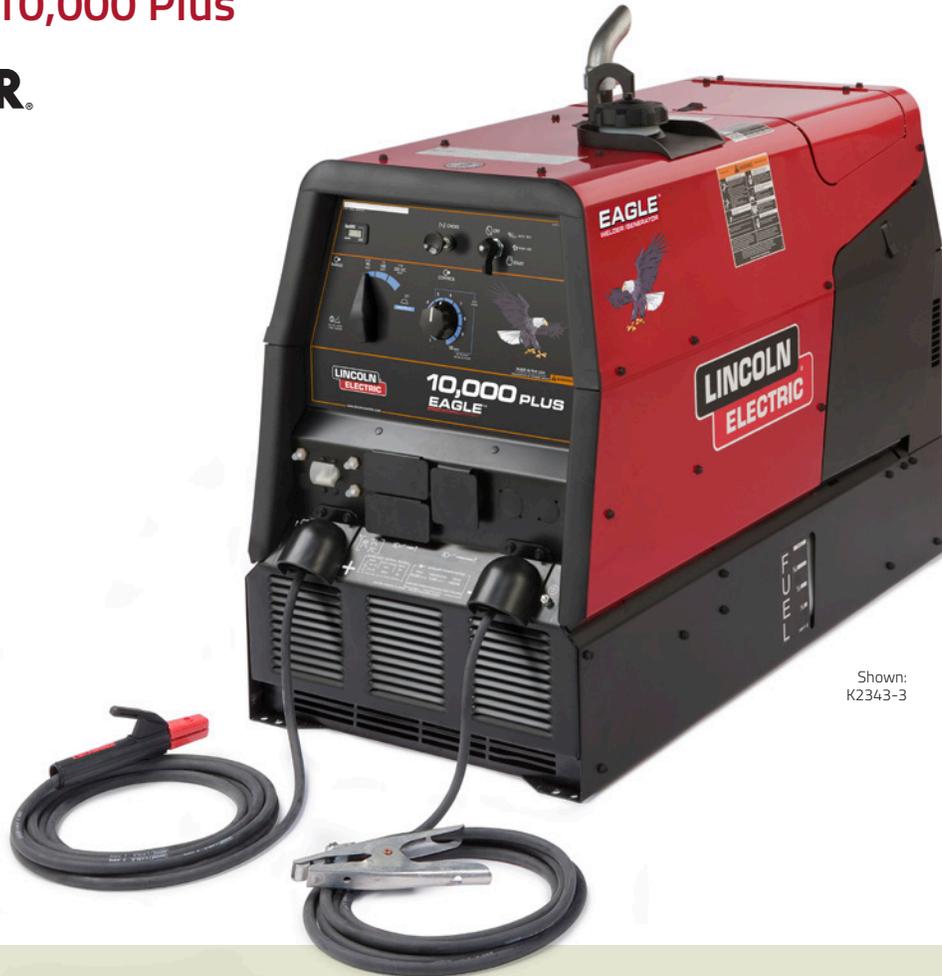

Shown:
K2343-3

KEY FEATURES

A great choice for getting the job done! For construction contractors, maintenance crews, farmers or ranchers, the Eagle™ 10,000 Plus does a variety of basic welding jobs. And with 10,500 watts of surge AC generator power, it handles a variety of other jobs: lights, grinder, Lincoln Electric inverter, plasma cutter (separate air supply needed) or emergency power.

- Totally enclosed case protects the engine and limits noise
- Smooth DC welding output
- 10,500 Watts AC generator power

Processes »

Stick, TIG, MIG, Flux-Cored, Gouging

Output »



Input »



Product Number »

K2343-3



Two Year Extended
Warranty Available in
the U.S.A. and Canada

FEATURES

- » **Totally Enclosed Case**
 - Engine is fully protected.
 - 3 service access doors.
 - Low noise – 76.4 dBA sound level at 23 ft. (7 m). 100.7 dB sound power (Lwa) at rated output.
- » **Versatile DC Welding**
 - Smooth DC welding output for a broad range of stick electrode types.
 - MIG, flux-cored and TIG capable (with optional equipment)⁽¹⁾.
- » **10,500 Watts Peak Single-Phase AC Generator Power**
 - Surge for motor starting.
 - 9,000 watts continuous power for generator, plasma cutter or inverter welder.
 - Lights, grinder, power tools.
- » **23 HP Kohler® Gasoline Engine**
 - 2 cylinder, 4 cycle overhead valve air-cooled design.
 - Oil drain extension for easy oil changes.
 - 12 gallon tank for extended run times.
 - Only 1.5 gallons/hour at 210 amps DC, 25V, 100% duty cycle. Visual fuel level gauge on both sides of unit.
- » **Rugged Reliability**
 - Welding and AC generator outputs rated at 104°F [40°C].

⁽¹⁾ A constant voltage (CV) power source is recommended for wire feeder applications. The across-the-arc Lincoln Electric LN-Series wire feeders may be used with a constant current (CC) power source, such as the Eagle™ 10,000 Plus, for non-critical applications where weld quality and deposition properties are not critical.

PERFORMANCE

Arc Performance

- Smooth DC welding output for a broad range of stick electrodes sold at a retailer near you, including Lincoln Electric Fleetweld® 37 [AWS E6013], Fleetweld® 47 [AWS E7014], Fleetweld® 180 [AWS E6011], Lincoln 7018AC [AWS E7018 H8] and Excalibur® 7018 MR [AWS E7018 H4R]. Also capable of MIG or flux-cored welding or basic TIG welding in constant current mode.
- Choose DC(+) for a deep penetrating arc or DC(-) for less penetration on thin sheet metal.
- Rated 225 amps/25 volts/40% duty cycle and 210 amps/25 volts/100% duty cycle for CC. All rated outputs at 104°F [40°C].
- Simple Output Range Selector can be used to select one of three amperage ranges with generous overlap for Stick/TIG welding.
- Fine adjustment control allows you to dial in just the right welding output for each application.
- Add productivity with self-shielded flux-cored wire welding in CC mode. Compatible with Lincoln Electric across-the-arc wire feeders for use with a variety of wire electrodes. For applications where weld quality and deposition properties are not critical.
- Expand to AC TIG welding with optional Square Wave™ TIG 200 (powered by AC generator power from the Eagle™ 10,000 Plus) for aluminum and other alloy welding.
- Arc gouge with up to 5/32 in. (4.0 mm) carbon electrode.
- Easy to maintain - Engine requires an oil change only every 100 hours and every 200 hours for the oil filter.

AC Generator Performance

- 10,500 watts surge AC generator power. Most surge power in its class. Use for motor starting.
- 9,000 watts continuous AC generator power. For high capacity needs such as a back-up generator, powering a Tomahawk® 1000 plasma cutter, an Invertec® inverter welder or a Square Wave™ TIG 175 welder. Also for lights, a grinder or other power tools.
- Delivers up to 38 amps from the single 120V/240V full-KVA receptacle. Standard circuit breakers protect the machine as well as your power tools.
- Delivers up to 40 amps from two 120V duplex receptacles.
- Get two tools in one when you use the Eagle™ 10,000 Plus as a power generator for emergency standby power, and/or for welding.
- Optional GFCI (Ground Fault Circuit Interrupter) Kit available for additional protection from electrical shock for 120V receptacles.
- Simultaneous welding and AC generator power – power up to 3,950 watts while welding at 145 amps (AC generator power is reduced when welding simultaneously per table below).

SIMULTANEOUS WELDING AND POWER LOADS

DC Welding Output (Amps)	Permissible Power (Watts)
0	9,000
90	6,000
145	3,950
225	0

FEATURES

- Top-of-the-line OHV engine: Kohler® Command® 23 HP CH730.
- Three engine doors provide machine protection and easy service access.
- Easy to Maintain – Engine requires an oil change only every 100 hours and every 200 hours for the oil filter.
- Electric Start Switch for easy starts. Switch combines OFF, START, and IDLER functions into one simple, compact, easy to use switch.
- Circuit breaker on the 12V battery circuit provides added component protection.
- Convenient truck or trailer mounting with front and rear holes in base.
- Fuel level slots in both sides of the base with a decal to easily read the fuel level in the tank. Helps you avoid running out of fuel during critical jobs.
- Large top fuel filler neck is easily accessed for refueling.
- Oil drain valve (no tools required) with removable extension tube.
- Includes: 20 ft. (6.0 m) of #2 electrode cable, electrode holder, 15 ft. (4.5 m) of #2 work cable and work clamp to get you started!



KEY CONTROLS



1. Engine Hour Meter
2. 3 Position Output Range Selector
3. Circuit Breakers
4. 120 Volt AC Receptacles (NEMA 5-20R)
5. Output Stud Covers
6. Ground Stud
7. 120/240 Volt AC Full KVA Receptacle (NEMA 14-50R)
8. Fine Output Control
9. Engine Choke Control (Stainless Steel Cable)
10. Engine Start Switch with Idler Control

- Oil dip stick, filters and spark plugs are easily accessed with left, right and top engine doors. Left and right doors are removable, if desired, for service.
- Adjust exhaust direction with top-mounted 360° rotatable exhaust muffler. Muffler made from aluminized steel for long life.
- Red and black powder paint finish offers increased durability with added protection from rust and corrosion. Also ultraviolet resistant to better retain color and gloss.
- Longer engine life, reduced noise emissions and greater fuel economy with automatic engine idler.
- Conveniently located engine maintenance label under top engine door.
- Engine hour meter makes it easy to schedule regular maintenance.
- Automatic engine shutdown protection for low oil pressure.
- Reliable start-up with Group 58 battery with 435 cold cranking amps.
- Dependability and long life aided by all-copper windings in rotor and stator with high quality insulation.
- Manufactured under a quality system certified to ISO 9001 requirements.
- Canadian Standards Association (CSA) certified.
- Three-year Lincoln Electric warranty (parts and labor) on welder (engine is warranted separately by the manufacturer).
- Backed by Lincoln Electric's Service Parts Commitment — We will ship in-stock parts within 24 hours of receipt of the order to anywhere within the U.S.

MACHINE SPECIFICATIONS

Product Name	Ordering Information	Description	CC Rated Output Current/Voltage/Duty Cycle	Generator AC Power ⁽¹⁾⁽²⁾	Dimension H x W x L inches (mm)	Weight lbs. (kg)
Eagle™ 10,000 Plus	K2343-3	225 Amp DC Arc Welder 10,500 Watts Surge 9,000 Watts Continuous AC Power	DC Constant Current 225A/25V/40% 210A/25V/100% Current Ranges 120-225A 70-145A 50-90A Max OCV @ 3700 RPM 80V RMS	10,500 Watts Surge 9,000 Watts Continuous 60 Hz Single Phase Two 120V Duplex Receptacles 20A per Duplex 40A Total ⁽³⁾ 120V/240V Receptacle 38A Each 120V Branch 38A @ 240V	29.9 x 21.5 x 42.3 (759 x 546 x 1074) To top of exhaust tube: 36.2 (920)	514 (233)

⁽¹⁾ When welding, available auxiliary power will be reduced. Output voltage is within +/- 10% at all loads up to rated capacity.

⁽²⁾ 120V will operate either 60 Hz or 50/60 Hz power tools, lights, etc.

⁽³⁾ Circuits cannot be wired in parallel to operate the same device.

ENGINE SPECIFICATIONS

Engine Model	Description	Horsepower & Displacement	Ignition	Capacities	Operating Speeds	Fuel Consumption
Kohler® OHV ⁽⁴⁾ Command CH730 (Gasoline)	2 Cylinder, 4 Cycle, OHV Air-Cooled Gasoline Engine Aluminum Alloy with Cast Iron Liners	23 HP @ 3600 RPM 44 cu in (725 cc)	Electric Start 12V Battery 435 Cold Cranking Amps Manual Choke	FUEL: 12 Gals (45 Ltrs) OIL: 2.0 Qts (1.9 Ltrs)	210A DC 3,500 RPM	1.5 Gals/Hr 5.7 Ltr/Hr
					High Idle 3,700 RPM	0.9 Gals/Hr 3.5 Ltr/Hr
					Low Idle 2,200 RPM	0.4 Gals/Hr 1.6 Ltr/Hr

⁽⁴⁾ Kohler® warranty is 3 years.

RECOMMENDED ACCESSORIES



GENERAL OPTIONS

Power Plug Kit (20 amp)

Provides four 120V plugs rated at 20 amps each, and one dual voltage, full KVA plug rated at 120/240V, 50 amps. 120V plug may not be compatible with common household receptacles.
Order K802N



Full-KVA Power Plug

One dual voltage plug rated at 120/240V, 50 amps. (NEMA 14-50P)
Order T12153-9



Full-KVA Adapter Kit

Provides convenient connection of Lincoln Electric equipment having a 240V AC 1-phase plug (NEMA 6-50P) to the full-KVA receptacle on engine-driven welders.
Order K1816-1



GFCI Receptacle Kit

Includes one UL approved 120V ground fault circuit interrupter duplex type receptacle and installation instructions. Replaces the factory-installed 120V duplex receptacle. Each receptacle of the GFCI duplex is rated at 20 amps. Maximum total current from the GFCI duplex is limited to 20 amps. Two kits required.
Order K1690-1



Spark Arrestor Kit

Attaches to muffler exhaust tube. Virtually eliminates spark emissions.
Order K1898-1



Canvas Cover

To protect the Eagle™ 10,000 Plus when not in use. Made from attractive red canvas material that is flame retardant, mildew resistant and water repellent.
Order K886-2



All-Terrain Undercarriage

For moving by hand at construction sites. Maneuvers over obstacles. Heavy-duty puncture-resistant (inner tube and sealant) tires.
Order K1737-1



Factory Undercarriage

For moving by hand on smooth surface floors. Heavy-duty, puncture-resistant (inner tube and sealant) tires and front caster. Convenient steering handle.
Order K1770-1



Welding Gas Cylinder/LPG Tank Holder

Holds welding gas cylinder or LPG tank (for products with LPG engine). For LPG: Use first holder for LPG tank and second holder for welding gas cylinder. Both holders will attach to the K1770-1 undercarriage.
Order K1745-1



Kohler Tune-Up Kit (CH235/Ch730/ECH740)

Includes: Spark Plug (Qty 2); In-Line Fuel Filter (Qty 1); Air Filter (Qty 1); Air Filter Pre-Cleaner (Qty 1); Oil Filter (Qty 1)
Order K3494-1



TIG OPTIONS

Square Wave TIG 200

This 46 lb (21 kg) TIG and stick welder includes adjustable AC Frequency Control and AC Balance for great results on aluminum, pulse mode and 120V or 230V input power capability.
Order K5126-1



WIRE FEEDER OPTIONS⁰⁰

LN-Series Across-The-Arc Wire Feeder and Accessories
See Publication E8.101



EASY-MIG® 180

Compact wire welder with tapped voltage control for MIG and flux-cored welding. 30 to 180 amp output range. Get input power from the AC generator of the engine-driven welder with the K1816-1 Full-KVA Adapter Kit (required). Add the K2532-1 Magnum™ 1005G Spool Gun for aluminum MIG welding.
Order K2698-1



Magnum® 1005G Spool Gun

Designed to easily feed 4 in. (102 mm) diameter 1 lbs. (0.45 kg) spools of .030 in. (0.8 mm) or .035 in. (0.9 mm) diameter SuperGlaze® aluminum MIG wire. Includes gun, adapter kit, .035 in. (0.9 mm) contact tips (qty. 3), gas nozzle, and a 1 lbs. (0.45 kg) spool of SuperGlaze® 4043 .035 in. (0.9 mm) MIG wire. Packaged in a convenient carrying case.
Order K3269-1



PLASMA CUTTING OPTIONS

Tomahawk® 1000

Cuts metal using the AC generator power from the engine-driven welder. Requires the T12153-9 Full-KVA Power Plug (1-Phase).
Order K2808-1

⁰⁰ A constant voltage (CV) power source is recommended for wire feeder applications. The across-the-arc Lincoln Electric LN-Series wire feeders may be used with a constant current (CC) power source, such as the Eagle™ 10,000 Plus, for non-critical applications where weld quality and deposition properties are not critical.

PRODUCT SPECIFICATIONS

Product Name	Rated Output Current/Voltage/Duty Cycle	Output Range	Engine	Number of Cylinders	HP@ Speed (rpm)	H x W x D inches (mm)	Net Weight lbs. (kg)
Eagle™ 10,000 Plus	225A DC CC/25V/40% 210A DC CC/25V/100%	50-225A DC 10,500 watts surge 9,000 watts continuous	Kohler® OHV Command® CH730	2	23 @ 3600	29.9 x 21.5 x 42.3 (759 x 546 x 1074) To top of exhaust tube: 36.2 (920)	514 (233)

For best welding results with Lincoln Electric equipment, always use Lincoln Electric consumables. Visit www.lincolnelectric.com for more details.

Manufactured at a facility with certified ISO Quality and Environmental Management Systems.

CUSTOMER ASSISTANCE POLICY

The business of The Lincoln Electric Company is manufacturing and selling high quality welding equipment, consumables, and cutting equipment. Our challenge is to meet the needs of our customers and to exceed their expectations. On occasion, purchasers may ask Lincoln Electric for information or advice about their use of our products. Our employees respond to inquiries to the best of their ability based on information provided to them by the customers and the knowledge they may have concerning the application. Our employees, however, are not in a position to verify the information provided or to evaluate the engineering requirements for the particular weldment. Accordingly, Lincoln Electric does not warrant or guarantee or assume any liability with respect to such information or advice. Moreover, the provision of such information or advice does not create, expand, or alter any warranty on our products. Any express or implied warranty that might arise from the information or advice, including any implied warranty of merchantability or any warranty of fitness for any customers' particular purpose is specifically disclaimed.

Lincoln Electric is a responsive manufacturer, but the selection and use of specific products sold by Lincoln Electric is solely within the control of, and remains the sole responsibility of the customer. Many variables beyond the control of Lincoln Electric affect the results obtained in applying these types of fabrication methods and service requirements.

Subject to Change – This information is accurate to the best of our knowledge at the time of printing. Please refer to www.lincolnelectric.com for any updated information.



The Lincoln Electric Company
22801 St. Clair Avenue · Cleveland, OH · 44117-1199 · U.S.A.

www.lincolnelectric.com