

FRESHPOINT EASY FLOW

UNDER COUNTER WATER FILTRATION SYSTEM



APPLICATION

- ◆ Drinking water

FEATURES • BENEFITS

- ◆ Great tasting water from an existing faucet
- ◆ NSF/ANSI certified to reduce 99% of lead
- ◆ Easy DIY install requires only what is supplied in box
- ◆ Compact design saves space under the sink
- ◆ Filter Release Button enables quick and easy change-outs
- ◆ Filter Life Indicator takes the guesswork out of filter replacement timing
- ◆ QR code enables quick access to product information and replacement orders
- ◆ Reduces up to 98% of PFOA/PFOS

OPERATION TIPS

- ◆ Replace filter every 3,000 gallons or 1 year, whichever comes first (or if flow has diminished).
- ◆ Filter Life Indicator provides visual reminder when it is time to replace the filter.


FILTER REPLACEMENT

- ◆ To check the remaining life of your filter, push Filter Life Indicator Button. In response, each blue light flash indicates three months of remaining filter life (e.g. two flashes represent six (6) months remaining life).
- ◆ When the filter needs to be changed, a red light will blink (3) three times, continuing three (3) times daily for eight (8) seconds for a period of 60 days unless deactivated by pressing the Filter Life Indicator Button.
- ◆ If red and blue lights are flashing alternately, batteries need to be replaced.
- ◆ After replacing filter, press and hold the Filter Life Indicator Button for five (5) seconds. The blue lights will flash four (4) times.

INCLUDES

- ◆ System with pre-attached hoses
- ◆ Wrenches (qty 2) and screwdriver
- ◆ User's Guide
- ◆ 2 AA Batteries

FRESHPOINT EASY FLOW UNDER COUNTER WATER FILTRATION SYSTEM

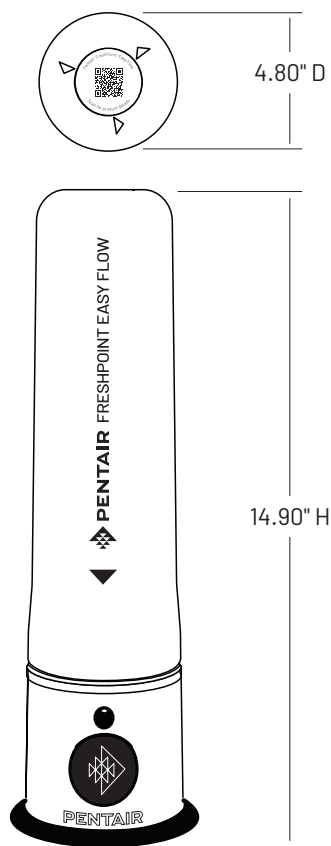

SPECIFICATIONS

- ◆ **System** (Model/Part No.)
Freshpoint Easy Flow/4005450
- ◆ **Inlet Size**
3/8" (.38 mm) Compression
- ◆ **System Dimensions (w/o Hoses)**
14.90" H X 4.80" D
(378.46 mm x 101.09 mm)
- ◆ **System Weight**
3.3 lbs
- ◆ **Contaminant Reduction**
Lead, Chlorine taste and odor, Sediment* and Cyst: NSF/ANSI Standard 53 certified to reduce cysts such as *Cryptosporidium* and *Giardia* by mechanical means.
- ◆ **Filter Life****
Up to 1 year
- ◆ **Capacity**
3,000 Gallons (11,356.24 Liters)
- ◆ **System Production Rate**
@ 60 psi: Up to 2.2 gpm* (8.33 Lpm)
- ◆ **Certifications**
NSF/ANSI Standards 42, 53
- ◆ **Feed Pressure Range**
40 - 125 psi (2.75 - 8.62 bar)
- ◆ **Temperature Range**
40 - 100°F (4.4 - 37.8°C)
- ◆ **Replacement Filter** (Model/Part No.)
RC-LCT/4005657
- ◆ **Replacement Filter Dimensions**
13.60" H x 3.90" D
(345.44 mm x 99.06 mm)

*Not Performance Tested By NSF

** Filter life dependent on gallon usage and overall incoming water quality.



System Tested and Certified by NSF International against NSF/ANSI Standards 42 and 53 for the reduction of the claims specified in the Performance Data Sheet and at www.nsf.org.

EPA EST NO. 090375-MEX-001



The model Easy Flow is certified by IAPMO R&T against NSF/ANSI 53 for the reduction of perfluorooctanoic acid (PFOA) and perfluorooctane sulfonate (PFOS).



13845 Bishops Dr. | Suite 200 | Brookfield, WI 53005 | United States

P: 262.238.4400 | Customer Service: 800.279.9404 | tech-support@pentair.com | pentair.com/easyflow

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners.

© 2022 Pentair. All rights reserved.

4005681 Rev B AU22