# For Residential and Commercial Applications

Job Name	Engineer / Architect	
Job Location	Wholesaler	
Submittal Date	Contractor	

# B1-\*\*DL/ B2-\*\*DL/ B3-\*\*DL Speedi Plumb® PLUS Braided Toilet Connectors - Compression Inlet

*Use:* For use in potable water distribution systems in accessible locations only.

### **Design Features:**

- Engineered polymer braided fibers bend freely without kinking or crimping
- Reinforced PVC inner hose provides added durability
- Rubber washers provide a large pliable sealing surface and ensure a long lasting water-tight connection
- Long wing nuts allow for quick connection and ensure dependable thread engagement



## **Operating Specifications:**

**Temperature:** 40°-160° F, intermittent to 180° F

*Pressure:* 125 PSI maximum

**Tubing Diameter:** 0.300" ID (0.550" OD)

CONNECTOR MATERIAL SPECIFICATIONS		
Inner Hose	Reinforced PVC	
Braiding	PVC coated yarn	
Barb	Brass	
Ferrule	Stainless steel	
Nut	Brass, plated or polypropylene	
Washer	Rubber	
Compression Nut	Brass, plated	
FIP Adaptors	Brass, plated	



#### Part Listing:

B1-6DL F	3/8" compression x 7/8" ballcock x 6" length
B1-9DL F	3/8" compression x 7/8" ballcock x 9" length
B1-9DLM F	3/8" compression x 7/8" ballcock (metal nut) x 9" length
B1-12DL F	3/8" compression x 7/8" ballcock x 12" length
B1-12DL P3	3/8" compression x 7/8" ballcock x 12" length, bagged, 3-pack
B1-12DLM F	3/8" compression x 7/8" ballcock (metal nut) x 12" length
B1-12DLU D	Universal Connector - $3/8$ " compression x $7/8$ " ballcock x $12$ " length with $7/16$ " & $1/2$ " slip-joint & $1/2$ " FIP adaptors or $7/16$ " rubber slip nut


This specification and all information contained herein is the confidential and exclusive property of Brasscraft Manufacturing Company, and shall not be disclosed to others without the written consent of Brasscraft Mfg. Co. This specification must be returned to Brasscraft Mfg. Co. if requested.



# B1-\*\*DL/ B2-\*\*DL/ B3-\*\*DL Speedi Plumb® PLUS Braided Toilet Connectors - Compression Inlet

### Part Listing (con't):

B1-16DL F	3/8" compression x 7/8" ballcock x 16" length
B1-16DLM F	3/8" compression x 7/8" ballcock (metal nut) x 16" length
B1-20DL F	3/8" compression x 7/8" ballcock x 20" length
B1-20DLM F	3/8" compression x 7/8" ballcock (metal nut) x 20" length
B2-12DL F	7/16" compression x 7/8" ballcock x 12" length
B2-20DL F	7/16" compression x 7/8" ballcock x 20" length
B3-9DL F	1/2" compression x 7/8" ballcock x 9" length
B3-12DL F	1/2" compression x 7/8" ballcock x 12" length
B3-12DLM F	1/2" compression x 7/8" ballcock (metal nut) x 12" length
B3-20DL F	1/2" compression x 7/8" ballcock x 20" length

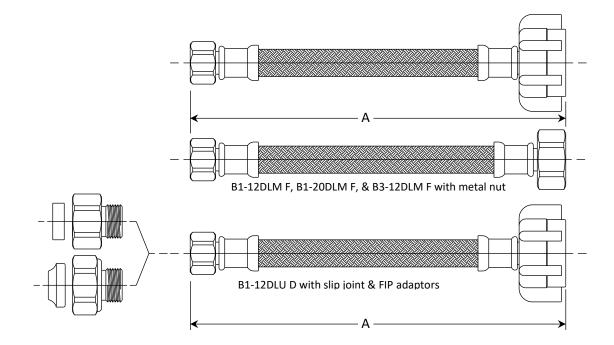

PART DIMENSIONS (Inches)		
Model	DIM. A	
B1-6DL	6.0 / 7.0	
B1-9DL	9.0 / 10.0	
B1-12DL	12.0 / 13.0	
B1-16DL	16.0 / 17.0	
B1-20DL	20.0 / 21.0	

PART DIMENSIONS (Inches)		
Model	DIM. A	
B2-12DL	12.0 / 13.0	
B2-20DL	20.0 / 21.0	
B3-9DL	9.0 / 10.0	
B3-12DL	12.0 / 13.0	
B3-20DL	20.0 / 21.0	

#### **Listings & Certifications:**

- IAPMO listed to ASME A112.18.6 / CSA B125.6
- IAPMO listed to NSF/ANSI 372 for Low-Lead Compliance
- IAPMO listed to NSF/ANSI/CAN 61



