



*Achim's Family of Home Furnishings thanks you for your most recent purchase.
We are confident this product will bring you years of pleasure and enjoyment!*

LUNA

**Make sure to read the instructions before
starting your installation!**

TOOLS NEEDED:

Tools you may need to install your blind: pencil, step-ladder, drill and bits, a cutter knife and screwdriver.

WARNING/HAZARDS

Keep cords out of children's reach. You can use one of these devices available at your local hardware stores: Cleat, Clamp or Clothes Pin, Tie downs



Move all cribs, beds, furniture and toys away from windows and window cords, preferably to another wall.



Keep all window pull cords and inner lift cords out of the reach of children. Make sure that tasseled pull cords are short and continuous-loop cords are permanently anchored to the floor or wall. Make sure cord stops are properly installed and adjusted to limit movement of inner lift cords.




Lock cords into position whenever horizontal blinds or shades are lowered, including when they come to rest on a windowsill.

Care & Maintenance for your Luna Blind

Dust regularly. Use soft, clean cloth, dusting mitt or vacuum cleaner with brush attachment (vacuum gently).


! WARNING

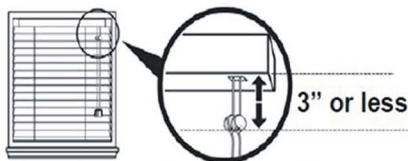

Inner cords can pull out to form a loop, which can strangle a young child.

- Inner cord stop devices can reduce this risk if positioned correctly on the pull cords.
- If inner cord stop devices are more than 3 in (76 mm) below the headrail when the blind is fully lowered, move them closer by following the inner cord stop device adjustment instructions.

! ADVERTENCIA

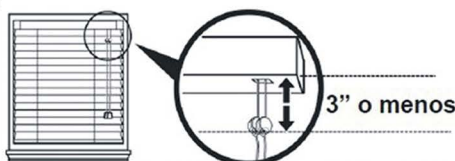

Las cuerdas internas pueden sacarse para formar un lazo en que puede ESTRANGULARSE un niño pequeño.

- Los dispositivos de paro de la cuerda interna pueden disminuir este riesgo si están situados correctamente en el halado de las cuerdas.
- Si los dispositivos de paro de cuerda interna son más de 3 pulgadas (76 mm) por debajo del riel superior cuando está bajada completamente la persiana, muévalos siguiendo las instrucciones del ajuste de paro de cuerda interna.

! WARNING/ADVERTENCIA



The cords on this product present a potential strangulation hazard.

Young children can STRANGLE in cord and bead chain loops.

They can also wrap cords around their necks and STRANGLE.

- Always keep cords and bead chains out of children's reach.
- Move cribs, playpens, and other furniture away from cords and bead chains. Children can climb furniture to get to cords.
- Do not tie cords together. Make sure cords do not twist together and create a loop.
- Always wrap the cords around the cleats in a figure eight, up high, out of the reach of children.

If you have any questions regarding installation please call Achim's
Customer Service at 1-800-54-ACHIM
www.achimonline.com

Made in China
V-10


LUNA 2" VINYL PLANTATION BLINDS

Tools You Will need:


• Phillips screwdriver • Hand/electric drill with philips drill bit minimum 2" long • pencil • Tape measure • (Optional: Pilot drill bit in one size smaller than the screw for metal window frame)

INCLUDED IN PACKAGE: 1) Complete blind 2) Two mounting brackets 3) One wand 4) Several screws

5) Support bracket(s) for size wider than 32" 6) One valance 7) Several valance clips 8) Instruction sheet. 9) One Cleat 10) 2 Screws Cleat

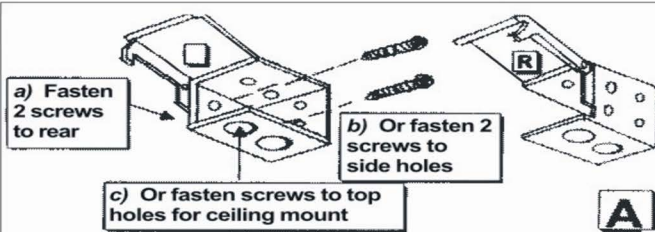


A

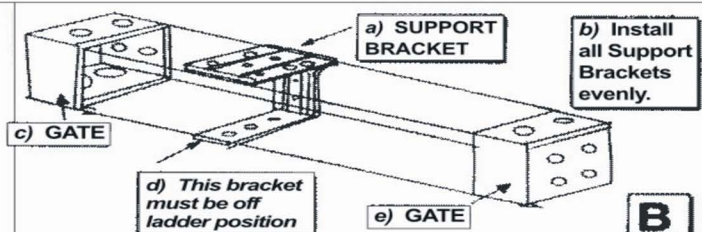


B

A.Brackets (R & L) should be placed at the width of blind's head rail + 1/4" each end. The bracket doesn't necessarily need to touch the inside face of the window frame.

B. Align the top of support bracket with top of mounting bracket before installation.

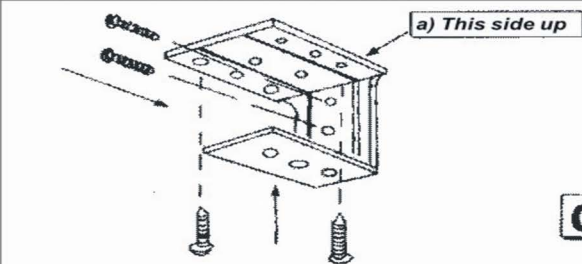


C

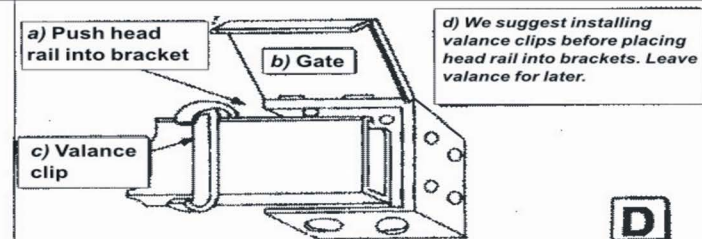

D


C.Install support bracket to wall or window frame from the front end or bottom with bigger flap on the top. This bracket must be installed off ladder positions.

D. Push rail into brackets with valance clips already installed. then press down gate to close bracket.

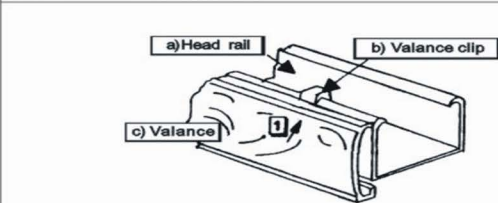


E

E. Put all clips onto head rail; put the top groove of valance under the upper clamp of each clip (1). then guide entire valance into the bottom clamps(2).

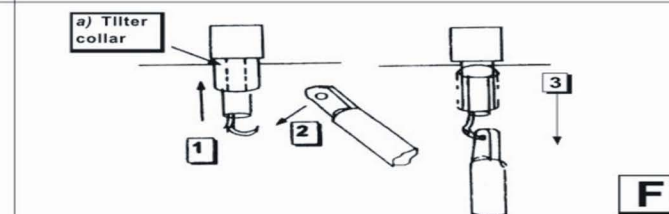


F

F. Slide tilter shaft collar way up (1) put hook through wand's hole. You may need to lift wand to near horizontal position to do this(2). Pull collar down to cover the hook, and it will lock wand in position(3).

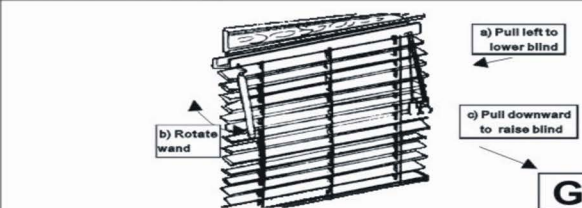


G

G. Always tilt blind horizontally before raising/lowering to extend the life of blind. **To Lower Blind:** Move cord to left, pulling down gently until Cord-Lock releases. Allow cord to slip through fingers until blind reaches desired level. Move pull cord to the right and release, cords will lock automatically. **TO Raise Blind:** Pull cord downward until blind reaches desired height, release cord, blind locks automatically.

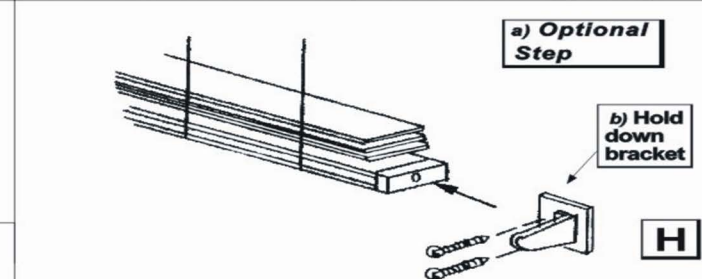

H

H. Screw two small screws into the base of the hold down bracket; snap bracket pin ends into the hole of bottom rail end caps.

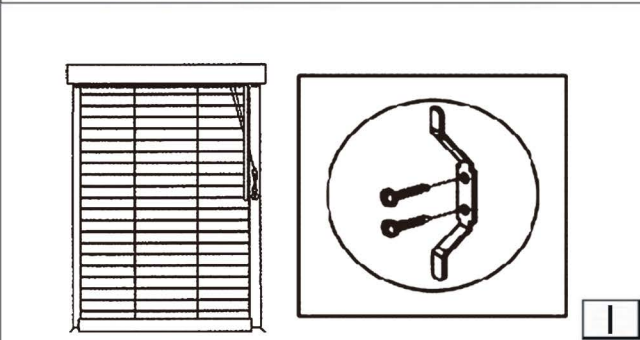

I

Cord Cleat Installation:

Cleats should be installed within 18 inches (457mm) from the headrail and at least 64 inches (1.6m) above the floor.

The location should be high enough that it is out of the reach of young children. Hold the cleat against the wall, parallel to the blind, and mark the holes with a pencil. Install cleat using the two cleat screws provided.

Once installed, wind cords around the cleat in figure eights. Keep cord taught around cleat at all times.

J

If you have any questions regarding installation please call Achim's

Customer Service at 1-800-54-ACHIM

www.achimonline.com

Made in China

V-10

