

Café Professional Series 30" Smart Built-In Convection Double Wall Oven


CTD90DP2NS1 / CTD90DP3ND1 / CTD90DP4NW2

CAFÉ

DISTINCT BY DESIGN™



ALSO
AVAILABLE IN



CTD90DP3ND1
Matte Black with
Brushed Stainless
handles



CTD90DP4NW2
Matte White with
Brushed Bronze
handle

FEATURES & BENEFITS

Monitor your food from your smart device thanks to a heat-resistant **in-oven camera**, which syncs to the SmartHQ app.

Make homemade chips, spices and dehydrated fruits more easily than ever with a **moisture-removing setting** in your oven.

A **soft-close oven door** reduces noise and eliminates slams, for a more peaceful environment in the kitchen.

Simplify the cooking process with **precision cooking modes** that automatically track progress, and make time and temperature adjustments.

Easily navigate wall oven settings thanks to a 7" touchscreen display.

This oven features **True European Convection**, an advanced convection system that uses a third heating element and reversing fan for the highest level of heat and air circulation.

Get a custom look in the kitchen by selecting your favorite hardware and finish combination. Choose from Matte White, Matte Black and Stainless Steel finishes, and Brushed Copper, Brushed Bronze, Brushed Black and Brushed Stainless hardware.

Eliminate the need for preheating and save time with a variety of **precision cooking modes**.

Integrated **hot air frying** technology gives you crispy results in your oven without using oil.

This smart oven features **built-in WiFi** so you can control oven functions with the SmartHQ app on your smart device.

This **smooth-gliding oven rack** can be left in the oven during the self-clean cycle so you never have to scrub.

This oven will fit your existing cut-out, or GE Appliances will help pay for modifications up to \$300.

APPEARANCE

| | |
|--------------|---|
| | Brushed Stainless Café Pro Style Customizable |
| Handle | |
| Installation | Above Warming Drawer Side-by-Side |

FEATURES

| | |
|---------------------------|--|
| Configuration | Double Oven |
| Cooking System | True European Convection with Direct Air (Both Ovens) |
| Oven Cleaning Type | Self-Clean with Steam Clean Option |
| Cleaning Time | Variable with Delay Clean Option |
| Oven Cooking Modes | Convection Bake Convection Bake Multi-Rack Convection Broil Hi/Lo Convection Roast Hot-Air Frying Precision Cooking Modes Thermal Bake Thermal Broil Hi/Lo |
| Self-Clean Oven Door Lock | Automatic |
| Control Type | 7" Full-Color Touch LCD Screen |
| Oven Features | 10-Pass Bake Element 10-Pass Dual Broil Element Closed Door Broiling |
| Oven Rack Features | 2 Self-Clean Roller Racks (Both Ovens) 6 Embossed Rack Positions (Both Ovens) |
| Oven Control Features | 12-Hour Shut-Off Capability Audible Preheat Signal Auto Recipe Conversion Sabbath Mode Control Lock Capability Cook Time C° or F° Programmable Dehydration Delay Time Electronic Clock & Kitchen Timer Mis-Wire Detection Oven Camera Proof Mode Remote Enabled; Scan-to-cook; Temperature Probe Warm Mode |
| WiFi Connect | Built-In |
| Connected Capabilities | Amazon Alexa; The Google Assistant IFTTT Nest Drop Innit |
| Cooking Technology | Convection |
| Oven Interior | 2 Halogen Interior Oven Lights (Both Ovens) Black Gloss Finish Hidden Bake |

CAPACITY

| | |
|--------------------|-----------------------|
| Capacity (Cu. Ft.) | 5.0 Upper / 5.0 Lower |
|--------------------|-----------------------|

POWER / RATINGS

| | |
|--------------------|----------------|
| Amp Rating at 208V | 40 |
| Amp Rating at 240V | 40 |
| Bake Wattage | 2,850W |
| Broiler Wattage | 3,300 / 1,000W |
| Convection Wattage | 2,400W |
| KW Rating at 208V | 6.8 |
| KW Rating at 240V | 9 |

WEIGHTS & DIMENSIONS

| | |
|--|--|
| Approximate Shipping Weight | 278 lb |
| Net Weight | 260 lb |
| Overall Height | 51-1/16 in |
| Overall Width | 29-3/4 in |
| Overall Depth | 26-3/4 in |
| Cabinet Width | 30 in |
| Cutout Dimensions (W x H x D) (in.) | 28-1/2 x 50-1/4 x 23-1/2 (without pedestal) 28-1/2 x 51-13/16 min. / 51-15/16 max. x 23-1/2 (with pedestal) |
| Oven Interior Dimensions (lower) | 25 x 17-3/8 x 20-1/4 |
| Oven Interior Dimensions (upper) | 25 x 17-3/8 x 20-1/4 |

Café Professional Series 30" Smart Built-In Convection Double Wall Oven

CTD90DP2NS1 / CTD90DP3ND1 / CTD90DP4NW2

C A F É

DISTINCT BY DESIGN™

WARRANTY

| | |
|----------------|---------------------------------------|
| Parts warranty | Limited 1-year entire appliance |
| Labor warranty | Limited 1-year entire appliance |
| Warranty notes | See written warranty for full details |

DIMENSIONS AND INSTALLATION INFORMATION


Wall coverings, countertops and cabinets surrounding the wall oven must be able to withstand a temperature of up to 200°F (94°C).

If the cabinet in which the wall oven is installed does not have a solid bottom, two braces or runners must be installed to support the weight of the oven. The runners and braces must support up to 400 lbs (181 kg).

Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.


ATTENTION INSTALLER: Electric wall ovens are NOT approved for installation with a plug and receptacle. They must be hard wired into an approved junction box.

IMPORTANT: Before installing, consult installation instructions packed with product for current dimensional data.

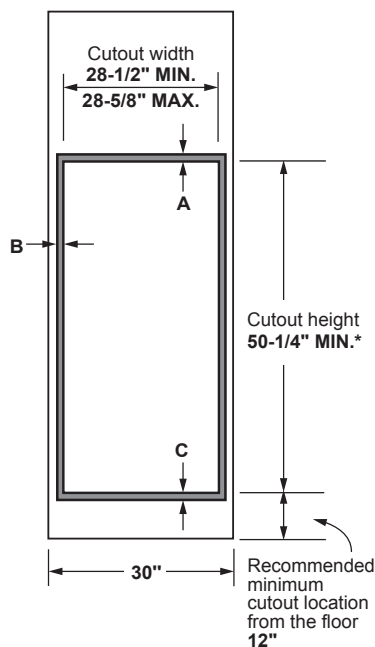

*Without pedestal: cutout height is 50-1/4" min.
With pedestal: cutout height is 51-13/16" min.-51-15/16" max.

| | |
|--|------------|
| Cabinet | 30" |
| A - Overlap of oven at top of cutout | 1" |
| B - Overlap of oven other side of edge of cutout | 3/4" |
| C - Overlap of oven at bottom of cutout | 1-1/4" |
| Oven | |
| D - Install depth | 23-1/2" |
| E - Overall height without pedestal | 51-1/16" |
| E - Overall height with pedestal | 52-15/16" |
| F - Overall width | 29-3/4" |

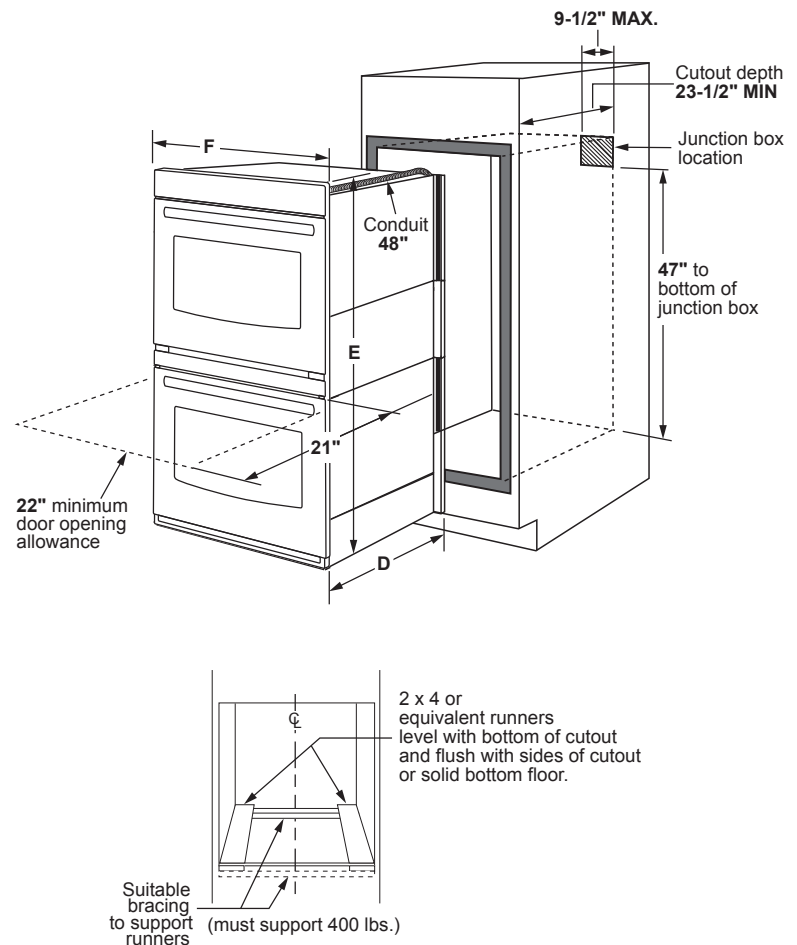

Dimension and installation information are shown in inches.

Café Professional Series 30" Smart Built-In Convection Double Wall Oven

CTD90DP2NS1 / CTD90DP3ND1 / CTD90DP4NW2

C A F É

DISTINCT BY DESIGN™

DIMENSIONS AND INSTALLATION INFORMATION

30" Double electric wall ovens are approved for installation above 27" and 30" warming drawers.


WHEN TO USE THE PEDESTAL RAILS: When replacing an older GE Appliances 30" double wall oven with a new GE Appliances model. Cutout Height = 51-1/16 to 52-15/16. This is our traditional cutout height.

WHEN NOT TO USE THE PEDESTAL RAILS: When replacing a 30" double wall oven from another manufacturer (ie; Whirlpool) with a new GE Appliances model. Cutout height = 50-1/4". You will need to verify that the existing cutout matches the 50-1/4" dimension.

If the new GE Appliances 30" double wall oven is being installed into new construction (ie; not a replacement), then the recommended installation is to use the pedestal rails.

ATTENTION INSTALLER: Electric wall ovens are NOT approved for installation with a plug and receptacle. They must be hard wired into an approved junction box.

IMPORTANT: Before installing, consult installation instructions packed with ALL products for current dimensional and combination data.

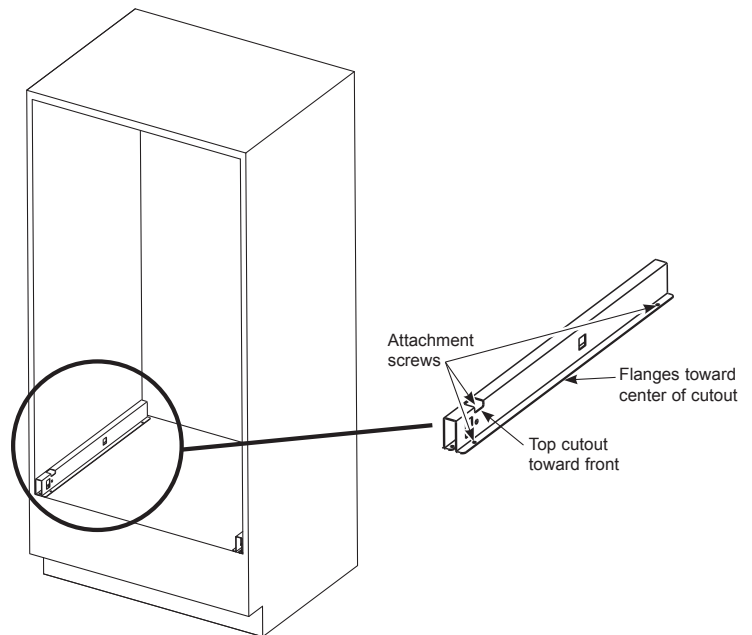

Dimension and installation information are shown in inches.

ADDITIONAL ACCESSORIES



CXWD0H0PMBZ
Brushed Bronze
2 handles
(Standard on Matte White)



CXWD0H0PMSS
Brushed Stainless
2 handles
(Standard on Matte Black)



CXWD0H0PMBT
Brushed Black
2 handles



CXWD0H0PMCU
Brushed Copper
2 handles