

Features

- Single lever handle is simple to use and makes adjusting water temperature easy.
- Premium KOHLER finishes with ScratchShield™ technology withstands even the toughest daily use.
- Compatible with 1- or 3-hole sinks.
- One-piece, self-contained ceramic disc valve allows both volume and temperature control.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.

Material

- Premium material for durability and reliability.

Installation

- Simplified faucet assembly; mounting hardware requires no special tools.

Water Conservation & Rebates

- 1.2 gpm (gallons per minute) flow rate.



ADA CSA B651 OBC

Codes/Standards

ASME A112.18.1/CSA B125.1
NSF/ANSI 61
NSF/ANSI 372
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)
ADA
ICC/ANSI A117.1
CSA B651
OBC



KOHLER® Faucet Lifetime Limited Warranty


See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description

	CP	Polished Chrome
	BN	Vibrant® Brushed Nickel

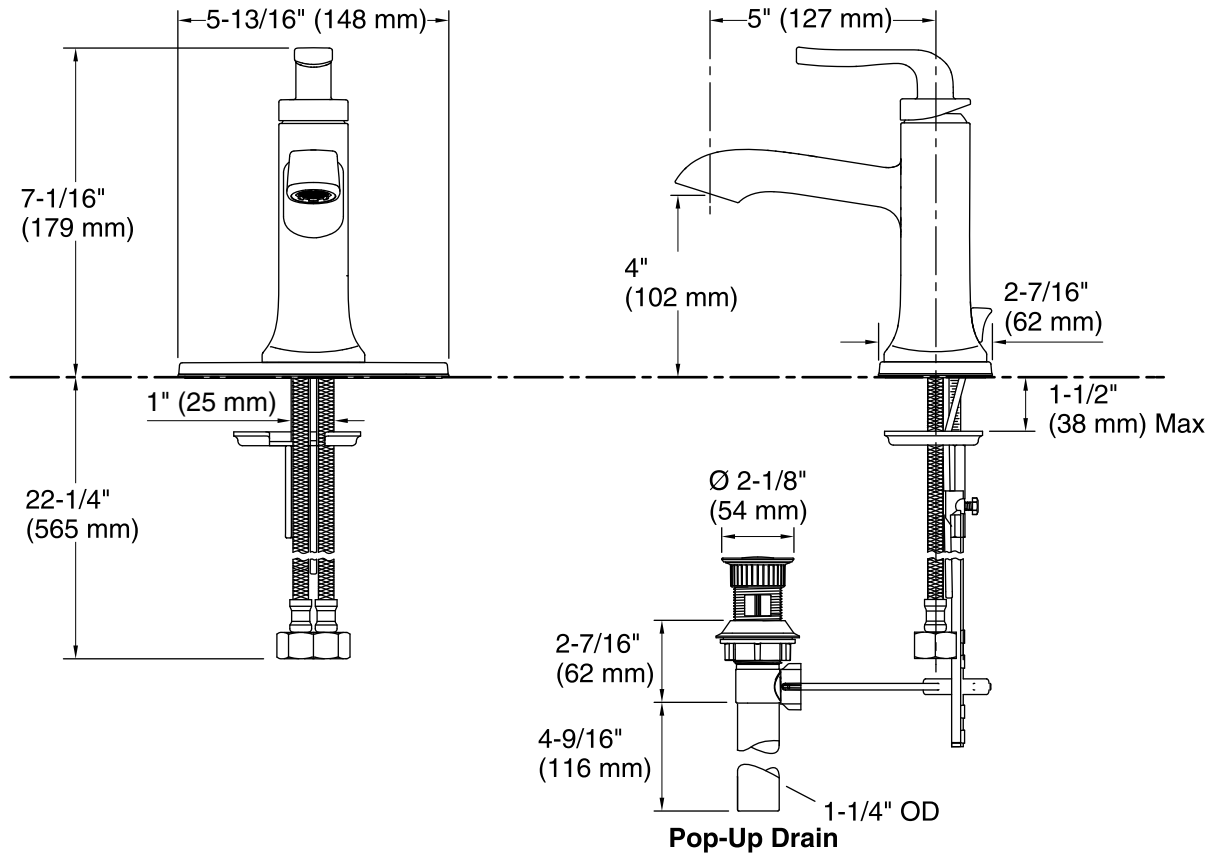

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Valve body: Plastic

Drain included: YES

Drain with overflow: YES

Drain tailpiece included: YES

Spout:

Spout reach: 5" (127 mm)

Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.