
Operation Manual

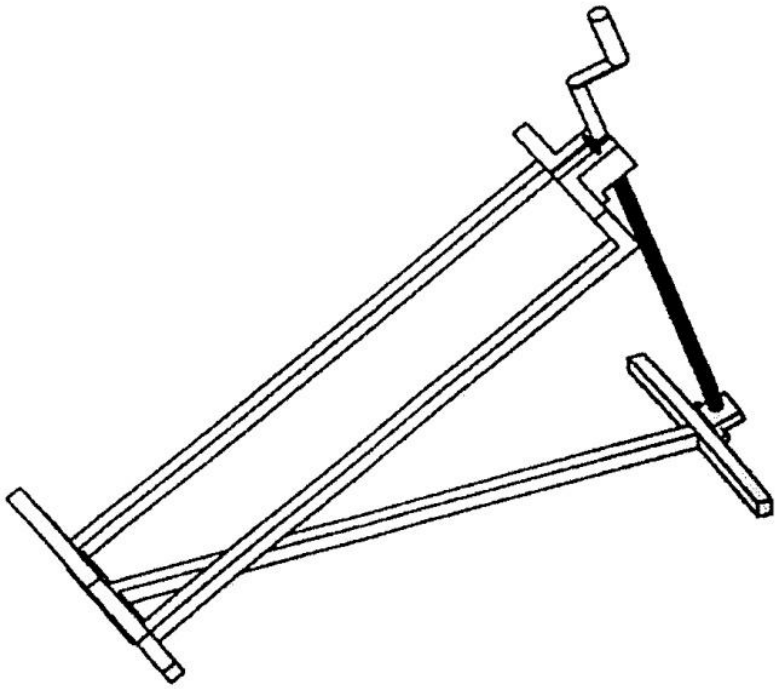

Read andfollow the operating instructions and safety information before using for the first time.

Thank you for purchasing this quality product. **To minimize the risk of injury by means we urge that our clients take some basic safety precautions when using this device. Please read the operation instructions carefully and make sure you have understood its content.**

Warning! To reduce the risk of injury if you use this machine, we recommend you always to respect the precautions, among which the following: Always read the instructions for use of this apparatus and keep these instructions for use.
Thank you that you have this product preferred.

ATTENTION! Before lifting a load, make sure that you how to use this apparatus to know. The inaccurate use can cause serious injury. All other uses are outlined here can be the damage to the apparatus cause and be dangerous to use.

Safety application requirements
For safe use:
1. You use the mower lifts only for lifting.
2. Keep children away from lawnmowers Heber distant
3. do not let anyone approach the load because you are using the mower lift.
4. Never leave the mower lift unattended because you use this.
5. Never use the mower lift about his ability. An overload may damage the mower lift, and / or cause a defect, causing serious injury.
6. The mower lift has been realized for a flat and hard ground. The use on a soft surface can cause instability and can fall down the load

Alwaysdeterminethe loadalongortransverse reinforcement, whichis located ontheopposite sideoftheSchwengelnscrew. Theloadshouldalways be placed horizontallyareattachedtothe mowerliftnot to damageandto preventthe loadfrom slidingorfall down.
3.Always checkthegoodeffect fromlawnmowerslifterbefore use. (Test onlywithout load)
4.When it comes toaride-on mower, make sure thatthe driverleave the seathas .


Image Overlaybeforeuse:


Assembly before use.

Position thejack on alawnmowerflatandstable surface

1. Expand the steel tube and fix three screws.
2. Install the handle and fix the screw.
3. Remove the locking peg.
4. Put the crankshaft upwards.


For a better use it is recommended to grease the screw before utilization.

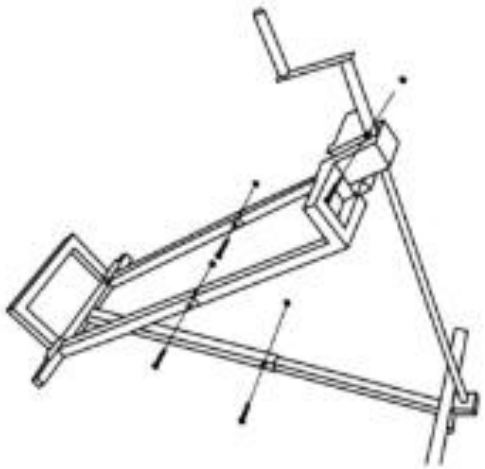

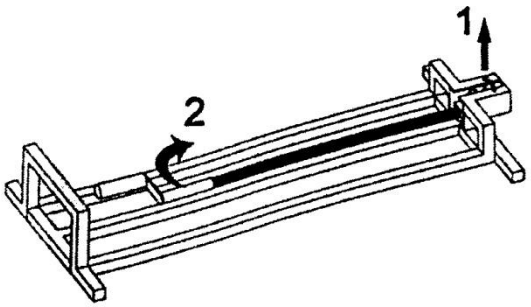

1. exempt the locking clip
2. The erect dick screw


For an effective use, we recommend you only to grease the screw.
effect:
3. The locking clamp reset so that the clapper bolt remains locked upright.
4. The dick in the clockwise direction so that turning the mower lifter comes up.

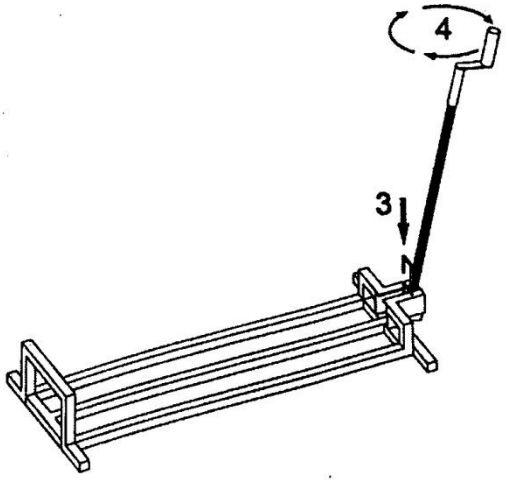

Theliftingofa lawnmower:

PositionThe mowerliftonaFlackenandhard ground.
1.The mowerastrideput onthejack withthelower sidealongthetransverse reinforcementpressed(on theopposite sideoftheclapperscrew)
,
Note:With respect tothe Riderpositionontheback ofthe mowerlift. Therear wheelsalongthe transverse-reinforcement(5) is pressed.

2.Thedickin the clockwise directionso thatturningthe mowerlift2 to 3cm highcomes. Make surethe goodbalanceofthemower onthe lifter.

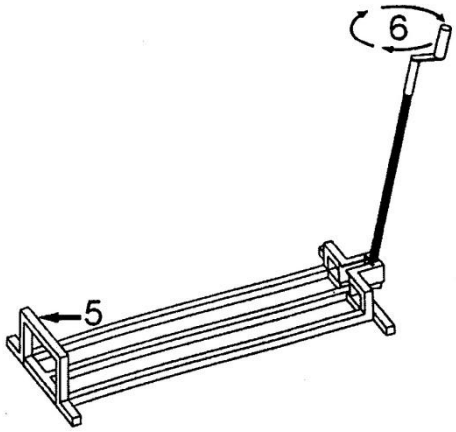

In the case ofimbalance, the clapperagainst theclockwise directionso that thelawn moweron the ground again, thencenteragainbythe mowerforwardorbuttto push.
Warning: Beware notto raisetoo highbecausethismay fallon thelawn mower. Do not lifthigher than necessaryfor theintervention.

,
maintenance
If you do notusethe mowerlifts.:
1.laythedickscrew
2.Thescrewgreaseregularly. Thisactionisaboutevery3 monthsrunning.
3.Periodically checkthat there is norust(approximately every 3 months): Cleanwithan oiledcloth.

Important notice:

The reprint or reproduction, even of excerpts, and any commercial use, even in part of this instructions manual require the written permission of WilTecWildangerTechnik GmbH.