

For Residential and Commercial Applications

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

WC43 7/8" OD Copper Water Heater Connectors – Female Sweat x Male Sweat

Use: For use in exposed locations only to connect water heaters and other water connected devices to the water supply

Design Features:

- **100% compliant** to California, Vermont and Maryland “low-lead” requirements


Operating Specifications:

Temperature: 40° to 180° F (NSF61 maximum 82° C)
Pressure: water pressures up to 125 psi maximum



MATERIAL SPECIFICATIONS	
Tubing	C12200 copper
Plug / Cap	Plastic

PART DIMENSIONS (Inches)					
Connector Length (±.25)					
Model	Dim.	12"	15"	18"	24"
WC43	A	11.25	14.25	17.25	23.25

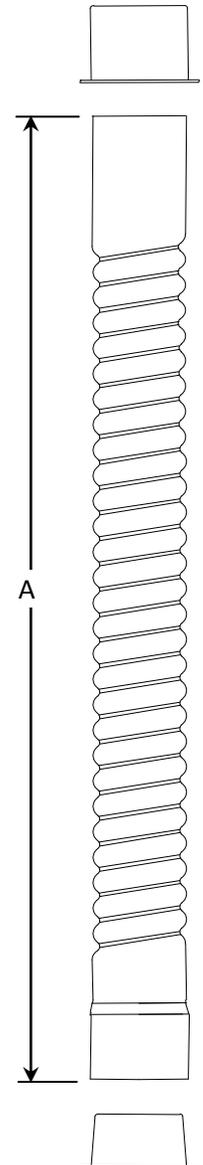

Part Listing:

- WC43-12 3/4" Nom. Female Sweat (7/8" ID) x 3/4" Nom. Male Sweat (7/8" OD) x 12"
- WC43-15 3/4" Nom. Female Sweat (7/8" ID) x 3/4" Nom. Male Sweat (7/8" OD) x 15"
- WC43-18 3/4" Nom. Female Sweat (7/8" ID) x 3/4" Nom. Male Sweat (7/8" OD) x 18"
- WC43-24 3/4" Nom. Female Sweat (7/8" ID) x 3/4" Nom. Male Sweat (7/8" OD) x 24"

Listings & Certifications:

- IAPMO listed to ASME A112.18.6 / CSA B125.6 (File # 0452)
- CSA listed to ASME A112.18.6 / CSA B125.6 (File # 204593)
- Compliant product CSA approved to California Health & Safety Code 116875, Vermont Bill S.152 and Maryland House Bill 372 (Project # 2174785)



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

BrassCraft[®]