

VANITY BACKSPLASH


BEFORE YOU BEGIN

We recommend consulting a professional if you are unfamiliar with installing bathroom fixtures and plumbing. We accept no liability for any damage to the floor, walls, plumbing, vanity cabinet, sink, counter top, or personal injury during installation.




Observe all local plumbing and building codes.

Unpack and inspect the vanity for damage. If any damage is found, contact our Customer Relations team at 9514339026 or send emails to prooxus@gmail.com.

NEVER LIFT THE VANITY TOP FLAT

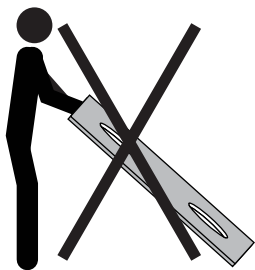

NEVER CARRY THE VANITY TOP FLAT

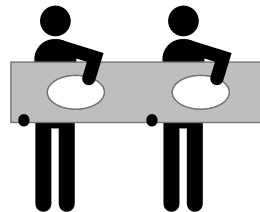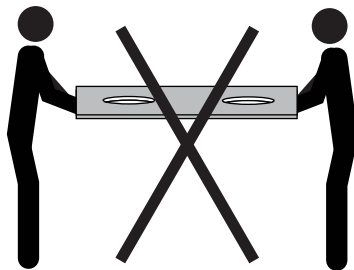


VANITY BACKSPLASH


INSTALL THE BACKSPLASH

1. Position the sidesplash or backsplash on top of the vanity and flush against the finished wall.
2. Secure the sidesplash or backsplash using a bead of siliconized acrylic caulk on the back surface.
3. Apply a bead of caulk along the seam of the wall and sidesplash or backsplash.
4. Apply a bead of caulk along the seam of the sidesplash or backsplash and vanity top.


NOTE: Allow the silicone to dry for a full 24 hours.

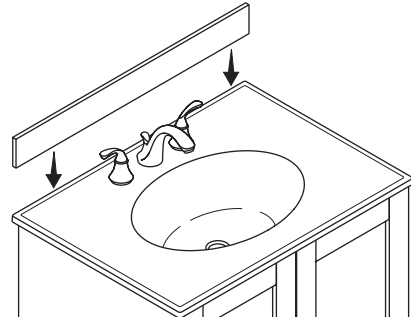


MAKE SURE THE SIDES OF THE SIDESPLASH OR BACKSPLASH LINE UP WITH THE SIDES OF THE VANITY TOP.

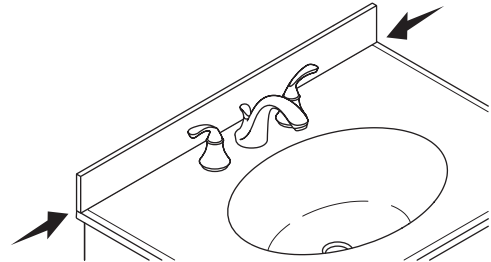

USE SILICONIZED ACRYLIC CAULK TO SECURE TO THE WALL

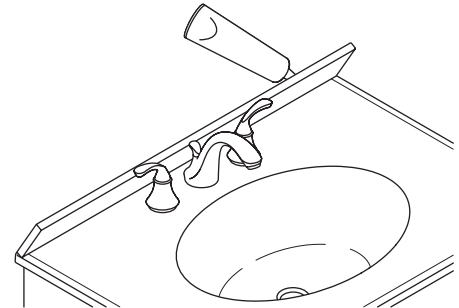

FINISH BY APPLYING A BEAD OF CAULK ALONG THE SEAM OF THE WALL AND THE VANITY TOP.

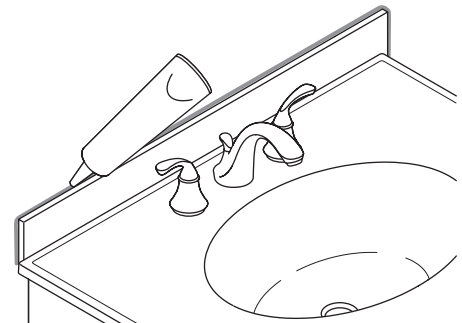

VANITY BACKSPLASH

5. For stone tops, such as marble and granite, it is recommended that you apply a high-quality sealer to protect from staining and discoloration. Stone sealer should be reapplied once or twice per year, depending upon usage.

