

FEATURES

- Single threshold for alcove installation.
- Integral 1" high tiling flange for a waterproof installation. and a 3" wide threshold as well as a 3" threshold height
- Installation for new and existing construction
- Easy installation. Level with thinset mortar mix.
- 10 Year Limited Residential Warranty / 3 Year Commercial Warranty

FL Classic Shower Base

- Transtone® is made from a composite material composed of resin, fiberglass, and stone. Compression molded solid surface for a precise radius and angles. It is strong, lightweight, slip resistant and scratch resistant.
- Features a stainless steel concealed drain with removable cover that brings both a design element and comfort to your shower experience. Lift-off cover allows for easy cleaning. ABS drain is included.




Modern Slip Resistance with a light rectangular comfortable texture. Easy to clean as well as slip resistant.



Specify Model

FL Center Drain Shower Bases											
	Model	A	B	C	D	E	F	G	H	I	Wt.
<input type="checkbox"/>	FL6036C	36"	18.9"	17.1"	30"	60"	60"	59.8"	34.8"	36"	72
<input type="checkbox"/>	FL6032C	32"	16.9"	15.1"	30"	60"	60"	59.8"	32.8"	32"	67
<input type="checkbox"/>	FL4836C	36"	18.9"	17.1"	24"	48"	48"	47.8"	34.8"	36"	52
<input type="checkbox"/>	FL4832C	32"	16.9"	15.1"	24"	48"	48"	47.8"	32.8"	32"	47

FL Classic Linear Base

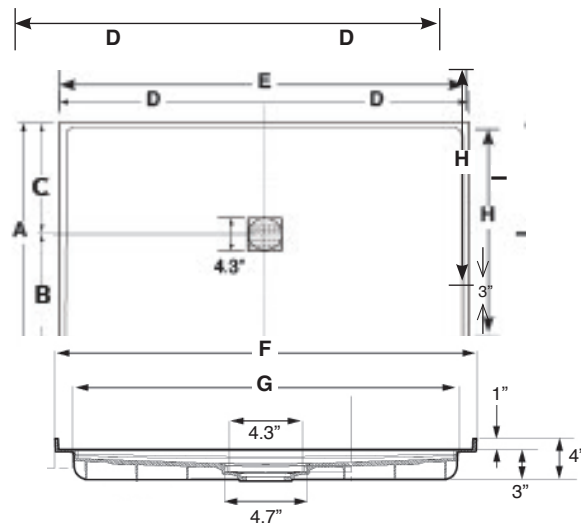

To Be Specified: Color

<input type="checkbox"/>	31 White			
<input type="checkbox"/>	38 Biscuit	White 31	Biscuit 38	Grey 39
<input type="checkbox"/>	39 Grey			
<input type="checkbox"/>	32 Cameo	Cameo 32	Sandbar 37	
<input type="checkbox"/>	37 Sandbar			

Compliance Certifications - Meets or Exceeds the Following Specifications

- IGC 154-2012
- ASME A112.18.1 / CSA B125.125.1-11
- IAPMO
- cUPC®

SHOWER BASES