KOHLER_®

Persuade[®] Curv

The Complete Solution[®] Toilet K-14047

Features

- Two-piece toilet.
- Elongated bowl offers added room and comfort.
- Comfort Height feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- Top-mount two-button flush offers a choice of 1.0 or 1.6 gallons per flush (gpf).
- Skirted trapway simplifies cleaning.
- Complete Solution toilets provide everything you need in one box, including bowl, tank, seat, wax ring, supply line, and floor hardware.
- Coordinates with other products in the Persuade Curv collection.
- Available only in Canada.

Technology

 Dual-flush technology allows you to choose between a full- or partial-flush.

Installation

• Standard 12-inch rough-in.

Water Conservation & Rebates

 WaterSense[®] toilets meet strict EPA flushing guidelines, including using at least 20 percent less water than 1.6-gallon toilets.

Recommended Accessories

K-75796 Cachet® Nightlight Quiet-Close™ Elongated Toilet Seat K-5588 Purefresh® Elongated Toilet Seat

Components

Product includes: K-4326 Skirted Trapway Bowl K-4774 Brevia[™] Elongated Toilet Seat K-3569 Toilet Tank Additional included component/s: Tank cover, Top-mount dual flush trip lever, ReadyLock[™] installation system, and Hardware Kit.





Codes/Standards

ASME A112.19.2/CSA B45.1 ASME A112.19.14 DOE - Energy Policy Act 1992 EPA WaterSense[®] California Energy Commission (CEC)

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description

0 White






Persuade[®] Curv

The Complete Solution® Toilet

K-14047

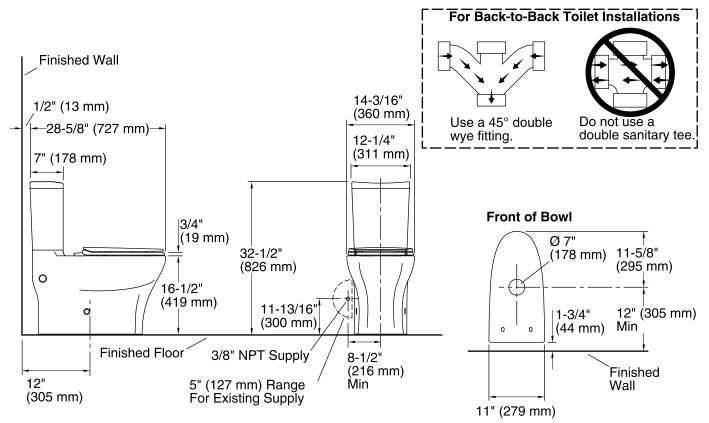

Technical Information

All product dimensions are nominal.	
Toilet type:	Two-piece
Bowl shape:	Elongated front
Trap passageway:	2" (51 mm)
Water Consumption	
Full:	1.6 gpf (6 lpf)
Reduced:	1 gpf (3.8 lpf)
Water surface size:	4-1/2" x 5-3/4" (114 mm x 146 mm)
Rim to water surface:	8-1/2" (216 mm)
Rough-in:	12
Seat-mounting holes:	5-1/2" (140 mm)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

