


SAFAVIEH

LIGHTING

Assembly Instruction

CAUTION: Read instruction carefully and turn electricity off at main circuit breaker panel before beginning installation.

ITEM#:LIT4373A

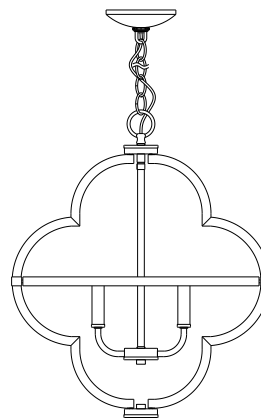

Care and Cleaning

To clean the outside of the fixture, use a dry or slightly dampened clean cloth(use cleanwater, never a solvent)to wipe the surface of the fixture.

To clear the inside of the fixture, first disconnect power to the fixture by turning off the circuit breaker or by removing the fuse at the fuse box. Next, use a dry or slightly dampened clean cloth(use clean water, never a solvent) to wipe the interior surface of the fixture

Do not use any cleaners with chemical, solvents or harsh abrasives. Use Only a dry soft cloth to dust or wipe carefully.

Estimated Assembly Time:30 minutes


Part List and Hardware List

PIECE	DESCRIPTION	PICTURE	QUANTITY	PIECE	DESCRIPTION	PICTURE	QUANTITY
A	mounting bracket		1X	I	ring		1X
B	mounting screw		2X	J	tube		1X
C	thread rod		1X	K	frame		1X
D	wire connector		3X	L	screw ball		4X
E	Collar loop		1X	M	ring		1X
F	canopy		1X	N	bulb		4X
G	chain		1X	O	ring		1x
H	flying rings		1X	P	frame		1x

Installation


Step 1

Unpack all parts from cartons carefully.
1. Fix the flying ring (H) to ring (I)




Step 2

Fix collar loop(E) to mounting bracket(A),
Fix mounting screw(B) to ceiling by through mounting bracket (A)

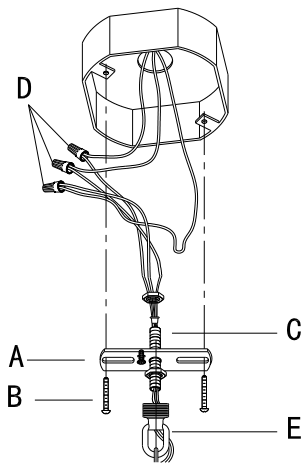

Step 3 Wire connection

Connect,Hot,Black or Red outlet Supply Wire to:	Connect,Neutral,White Outlet Supply Wire to:
Black	White
*Parallel Cord(round&smooth)	*Parallel Cord(square&ridged)
Clear,Brown,Gold or Black without Tracer(colored stripes)	Clear,Brwn,Gold or Black without Tracer(colored stripes)
Insulated Wire(not green)with copper metal conductor	Insulated Wire(not green)with Silver metal conductor



*Note: When parallel wire(SPTI&SPTII)is used. The neutral wire is square shaped and ridged and the hot wire will be round in shape and smooth.(See illustration on left)



Grounding Instructions:

- a) For installation in the United States: Wrap ground wire from outlet box around green ground screw on mounting bracket, no less than 2" from wire end. Tighten ground screw. If fixture is supplied with a ground wire, connect to outlet ground wire with a wire connector.
- b) For installation in Canada: If fixture is supplied with ground wire, wrap ground wire around green grounding screw on mounting bracket. Tighten ground screw.

Step 4

Push the canopy (F) though the Chain(G) and secure it by fixing the collar loop(E) with Ring(O) to the threaded rod(C)

Step 5

Separately screw tube (J) and ring (M)to frame (K) and then fix frame (K) to frame (P)with srew ball(L) install the bulb(N)

**PLEASE USE ON/OFF TYPE "B" BULB MAX 40-WATT
OR CFL BULB MAX 9-WATT
THERE ARE 4PCS TYPE "B" 25 WATT BULB IN THE BOX.**

Step 6

Consult a qualified electrician to ensure correct branch circuit conductor

ENJOY YOUR LAMP

