

Assembly Instructions

Please read these instructions carefully before starting assembly. We suggest you carry out the assembly on a soft surface like a carpet, so as to avoid scratching the paint. Please note because of the nature of cast metal, you may find roughness on the surface which enhances the beauty of the product and is not a defect.












*Do not discard any of packaging until you have checked that you have all parts and pack of fittings.

*Keep children away during assembly. This item contains small parts which can be swallowed by children.


*Retain the assembly instructions for future reference.

*Maximum load on the edge of the table is 5kg

PARTS LIST


Part No.	Description	Part picture	Qty	Part No.	Description	Parts Picture	Qty.
①	Table Top		1	A	M8 Nut		8
②	Table Leg		4	B	M8 Spring washer		8
③	Leg Support		1	C	M8 Flat washer		8
④	Wrench		1	D	M8 protect hats		8
⑤	Screwdriver		1	E	Stud M8		4
⑥							
L	Rubber Leg Pad		4	Note: Rubber Leg Pad L have been presaaembled			

Step 1

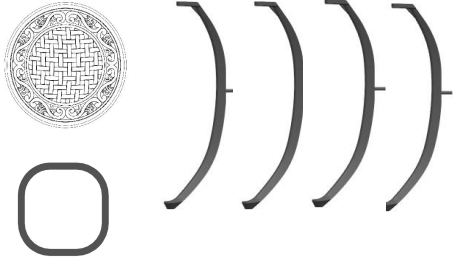


Place all parts on a clean and soft surface

Step 2

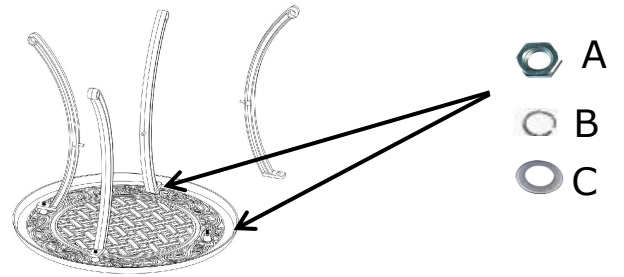


Turn over the table top. Attach the Stud M8(E) into the Nuts (inside table), Then, Attach table Legs (2) to the Studs on the Table Top (1) using Washers and Nuts (A,B,C). DO NOT over tighten

Step 3

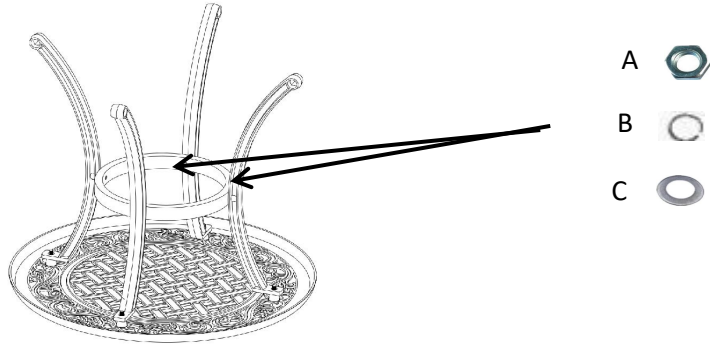

Attach the Table legs Support (3) to the four Legs (2) using flat washer, spring washer and nuts (A,B,C) DO NOT over tighten.

Step 4

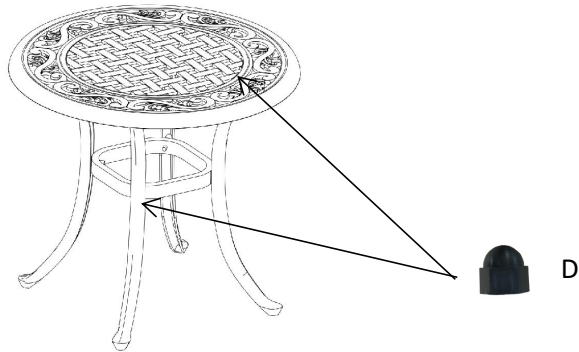

Tighten all Nuts with Wrench. And Turn over the table. Adjust the pre-installed Rubber Pad (L) until the Table is level with the ground, Tighten all the nuts and cover them with nut caps (D). Your table can use now.