

ARCHER_{TM}

Features


- Fiberglass (FRP)
- One-piece construction
- For alcove installations
- Removable cover
- Drain hole at center
- 60" (152.4 cm) x 60" (152.4 cm) x 3-15/16" (10 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- CSA B45.0
- CSA B45.5
- ASTM E162
- ASTM E662

FRP SHOWER RECEPTOR WITH REMOVABLE COVER K-9395

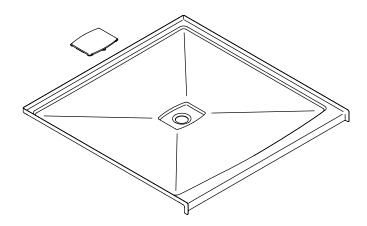

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant_® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

/lodel	Description		Colors	Colors/Finishes	
(-9395	FRP shower receptor with removable cover		□ 0	☐ Other	
	ended Accessories Shower drain	□СР	□ PB	□ Other	
K-9132					

Product Specification

The fiberglass (FRP) shower receptor with removable cover shall be 60" (152.4 cm) in length, 60" (152.4 cm) in width, and 3-15/16" (10 cm) in height. Shower receptor shall be for alcove installations. Shower receptor shall be one-piece configuration with drain hole at center. Shower receptor shall be Kohler Model K-9395-

ARCHER_{TM}

Included components:
Removable cover

Technical Information

Fixture*:			
Weight	83 lbs (37.7 kg)		
Configuration	one-piece		
Drain hole	3-3/8" (8.6 cm) D.		
* Approximate measurements for comparison only.			
	<u> </u>		

1062356

Installation Notes


Install this product according to the installation guide.

Shimming may be required to level the fixture.

Shimming may be required between the stud frame and the fixture.

The stud opening tolerance is +1/4" (6 mm), -0" (0 mm).

When fire rated construction is specified, dimensions are to the inside of the fire-rated wall.

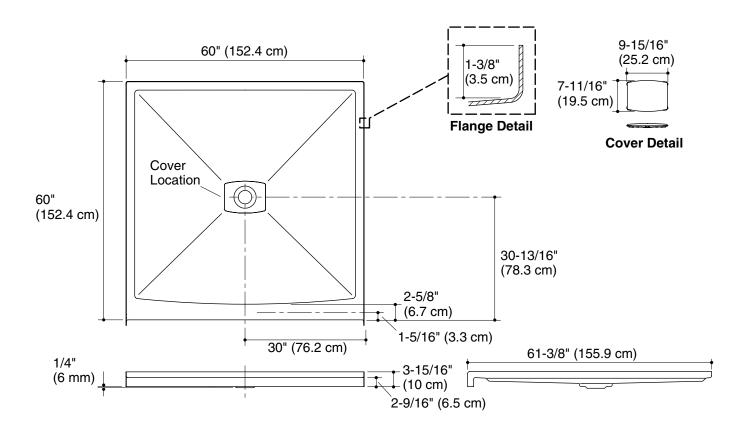

Product Diagram

