PROBRITE®

LED Security Flood Light



Catalog No.	: FSXD30-MS-4K-BZ
Type	: Flood and Spotlight
Project Name	:
Location	:
Qty	:
Date	:

WALL MOUNT OPTION



EAVE MOUNT OPTION



CERTIFIED

Suitable for **Wet Locations**

PROBRITE's versatile 22-watt LED flood light with motion sensor can be mount on wall, eaves, poles (8 ft. to 15 ft. H) or on the ground which makes it suitable for entrances, walkways, corridors, yards, driveways and patios. It is durable and reliable because of die-cast aluminum construction, and painted with a commercial-grade powder. Additionally, this product is incredibly easy to install, making it effective to integrated into any lighting scheme.

PRODUCT PERFORMANCE AT A GLANCE

SYSTEM WATTAGE	LUMENS	LPW	CRI	REPLACES (Incandescent)
22W	3000 lm	130 lm/w	>70	75W

MOTION-ACTIVATED

HOUSING

Die cast aluminum housing with corrosion resistant powder-coated paint finish. It is designed to ensure cooling by natural convection and passive airflow, to let driver perform efficiently

OPTICS

Clear polycarbonate lens, does not alter beam and provide focused and clear lighting output.

FINISH

Fade, weather, and abrasion resistant, electrostatically applied, thermally cured, triglycidal isocyanurate (TGIC) textured polyester powdercoat bronze paint finish.

IP RATING & LISTINGS

LED light engine is Energy Star and suitable for Wet Location.

MOUNTING

It can be mount on wall or eave with plate attached to any junction box.

WARRANTY

Covered by a 5-year limited warranty.
See probrite.com/warranty for details.

3500 NW BOCA RATON BLVD 717, BOCA RATON, FL 33431
1-844-507-5651 | support@probrite.com | www.probrite.com

PROBRITE®

PRODUCT SPECIFICATION


Product Dimensions	: 7.37" x 12.68" x 7.97"
Weight	: 2.42 lbs
Lumens	: 3000
LED Wattage	: 22W
Efficacy	: 130
CRI	: >70
Replaces (Incandescent)	: 75W
Mounting	: Wall Mount/Eave Mount
Frequency	: 50-60Hz
THD(Total Harmonic Distortion)	: <20%
PF(Power Factor)	: >0.9
Ambient Operating Temperature	: (-30)-40°C
Input Voltage	: 120V
LED Chip	: -
Photocell	: Yes
Driver	: Non-dimming
Standard Lifetime	: 50,000 hrs
Standard Warranty	: 5 Years
Water Proofing Grade	: Suitable for wet location
CCT	: 4000K Bright White Light
Certifications	: Energy Star, FCC Certified, UL Certified



Warm White | Bright White | Daylight

2700K 3000K 3500K 4000K 5000K

PRODUCT LINE DRAWING

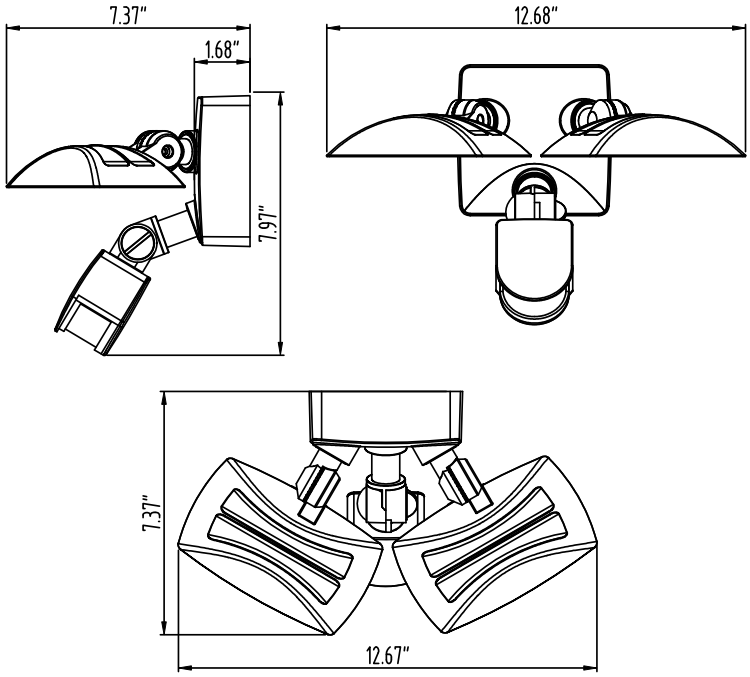

APPLICATION

SUITABLE FOR MULTIPLE APPLICATIONS


SECURITY • GENERAL LIGHTING • ENTRYWAYS • DRIVEWAYS • BACKYARDS • SIGNAGE





SUGGESTED MOUNTING HEIGHT:
6-12 FT.(1.8-3.7 M)

3D PHOTOMETRIC VIEW

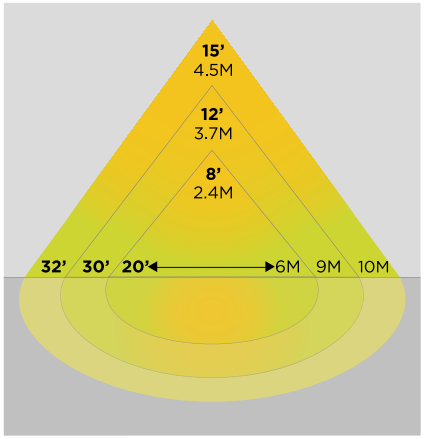

3500 NW BOCA RATON BLVD 717, BOCA RATON, FL 33431
1-844-507-5651 | support@probrite.com | www.probrite.com