


Deep Seating Chair

Assembly Guide

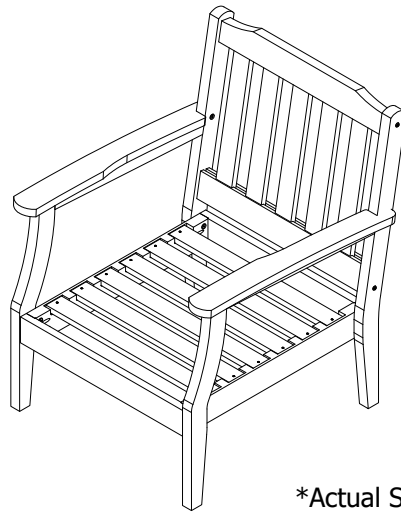


*Actual Style May Vary from
the One Pictured in this Guide

DSL01

HARDWARE INCLUDED


A

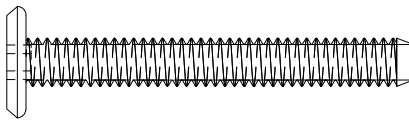

Qty: 10

(1/4-20 x 2")

B



Qty: 2

(1/4-20 x 3")

TOOLS INCLUDED



5/32" HEX KEY


CUSTOMER SUPPLIED TOOLS

Cordless screwdriver/drill OR
multi-bit handle for the T-15 bit

IMPORTANT!

DO NOT fully tighten bolts until all bolts are started.

LEFT ARM ASSEMBLY

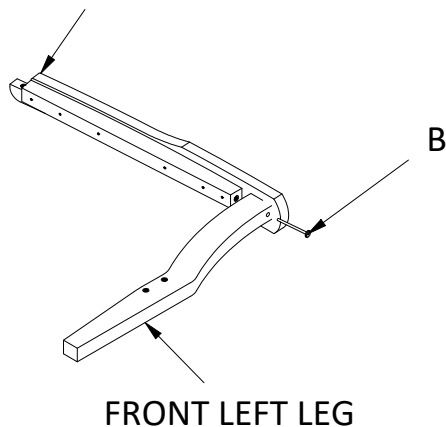

FRONT LEFT LEG

STEP 1

Attach the Front Left Leg to the Left Leg Assembly using (1) B bolt.

STEP 2

Repeat Step 1 for attaching the Front Right Leg & Right Arm Assembly.

STEP 3

Lay the Front Left Leg Assembly on its side and line the Back & Seat Assembly up as shown. Using (5) A Bolts attach the Back and Seat Assembly to the Front Left Leg Assembly.

STEP 4

Repeat Step 3 for attaching the Front Right Leg to the Back & Seat.

