

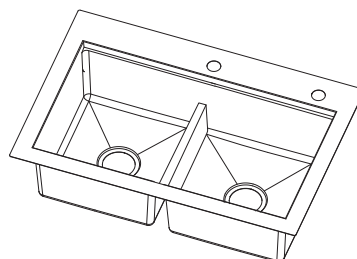



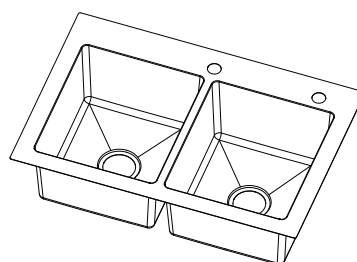

USE AND CARE GUIDE

STAINLESS STEEL KITCHEN SINK



Model#ACS2522A1T
Model#ACS3022A1T
Model#ACS3322A1T
Model#ACS3322A2T
Model#ACS3322A1TS
Model#ACS3322A1T-FS
Model#ACS2522A1T-F
Model#ACS3022A1T-F
Model#ACS3322A1T-F
Model#ACS3322A2T-F

Model#ACS2722A1T-W
Model#ACS3022A1T-W
Model#ACS3222A1T-W
Model#ACS3322A2T-W
Model#ACS2722A1T-FW
Model#ACS3022A1T-FW
Model#ACS3222A1T-FW
Model#ACS3322A2T-FW

Questions, problems, missing parts? Before returning to the store,
call Glacier Bay Customer Service

8 a.m. - 7 p.m., EST, Monday - Friday, 9 a.m. - 6 p.m., EST,
Saturday

1-855-HD-GLACIER

HOMEDEPOT.COM/GLACIERBAY


THANK YOU

We appreciate the trust and confidence you have placed in Glacier Bay through the purchase of this kitchen sink. We strive to continually create quality products designed to enhance your home. Visit us online to see our full line of products available for your home improvement needs. Thank you for choosing Glacier Bay!

Pre-Installation

PLANNING INSTALLATION


Before installation, verify the cabinet clearance:

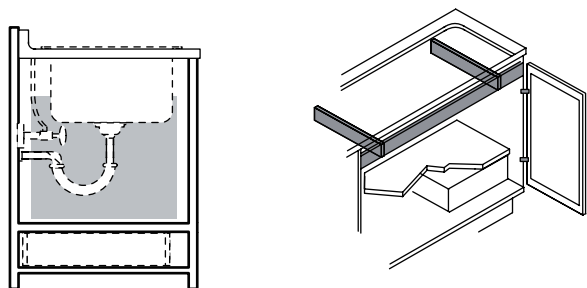


Compare all parts with the Hardware Included and Package Contents lists in this manual. Check the surface of the sink for any flaws or damage, including dents, bends, bumps, or scuff marks. If any damage is noticed or parts are missing, do not proceed with the installation. Contact the Customer Service Team at 1-855-HD-GLACIER or visit www.HomeDepot.com/GLACIERBAY.

 **Note:** This sink is a Drop-in mount / undermount installation.

TOOLS REQUIRED

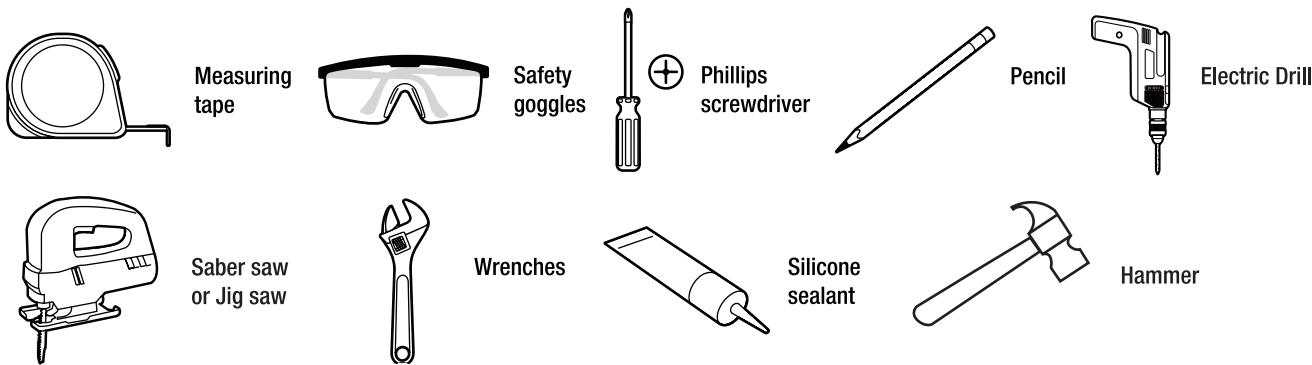

HARDWARE INCLUDED

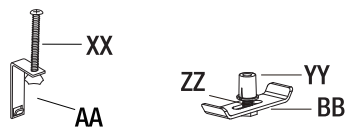


Part	Description	Quantity
AA	Drop-in mount clip	10
XX	Drop-in mount clip's screw	10
BB	Undermount Clip	10
YY	Undermount Clip's insert	10
ZZ	Undermount Clip's screw	10

 **Note:** Hardware not shown to actual size. These screws can be installed with power tools.


Installation Types

You can choose to install this sink over your countertop (Type 1: Drop-in mount) or under your countertop (Type 2: Undermount) according to your taste and needs.

Type 1: Drop-in mount

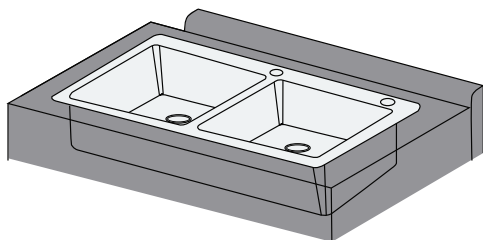

Type 2: Undermount

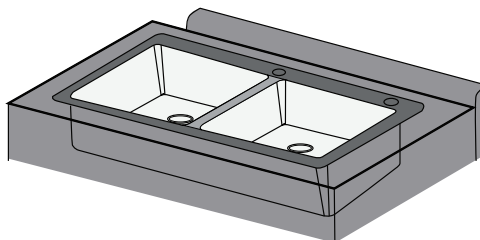


Drop-in mount Installation

1 Preparing the countertop


Note: Leave sufficient space around sink hole for clip installation. For drop-in installation, rear template edge should be placed at least 1 inch from wall to ensure faucet handle is unobstructed.

- Center the template (B1) on the counter so that it is parallel to the counter edge and that the installation hole will not interfere with the structure of the cabinet.
- Tape the template (B1) to the countertop to keep it in place and trace the outer edge on the template (B1) with a pencil.

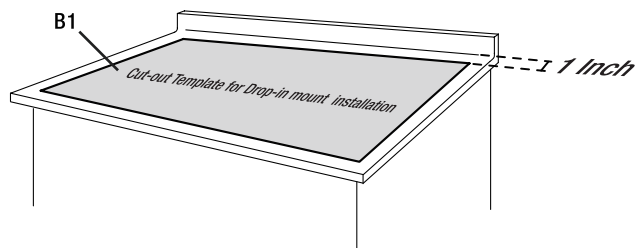


2 Cutting the installation hole

- Drill a pilot hole and cut the countertop opening. Use the appropriate cutting tool for the surface you are cutting.

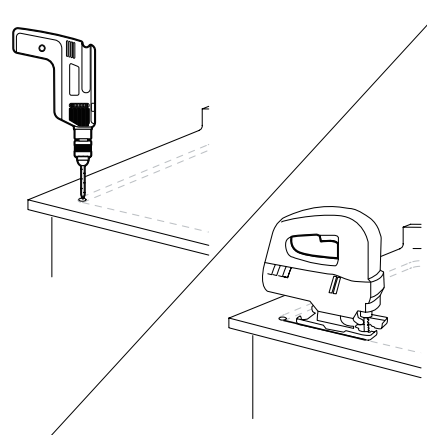

3 Installing the strainer assembly

- Place the sink (A) into the installation hole to verify the fit. Adjust the cutout if necessary.
- Install the strainer assembly as these steps describe. It is easier to install the strainer assembly to the sink before the sink is installed to the cabinet.
 - 1) Apply a small amount of plumber's putty (not included) in the notch around the drain hole of the sink (A). Place the strainer ring (E) on top of the drain hole in the sink (A).
 - 2) Put strainer basket (C) into the strainer bowl (D) and place this assembly into the drain hole in the sink (A).
 - 3) From underneath the sink (A), place the paper washer (F), rubber washer (G), locknut (H), plastic joint (I), and connecting nut (J) under the drain hole in the sink (A).
 - 4) Tighten the locknut (H) to hold the strainer assembly securely in place.

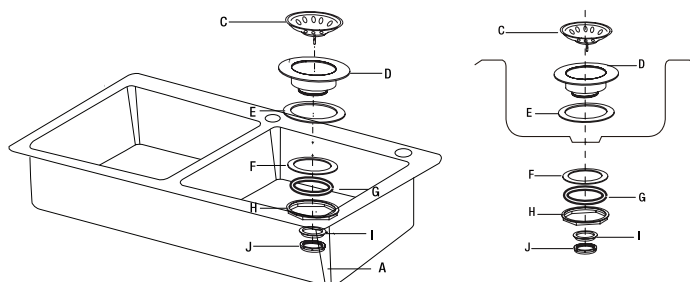


Drop-in mount Installation (continued)

4 Installing the sink


- (1) Apply silicone sealant (not included) around the underside and lip of the sink (A).
- (2) Carefully lower the sink (A) into the counter. Let it sit briefly to allow silicone to begin to set.
- (3) Attach the mounting clips (AA). Tighten clip screws(10pcs) by Electric Drill.
- (4) After the sink and countertop are fixed, flipover and install onto the cabinets.

Note: After completing steps 1-3, wipe excess sealant with rag.

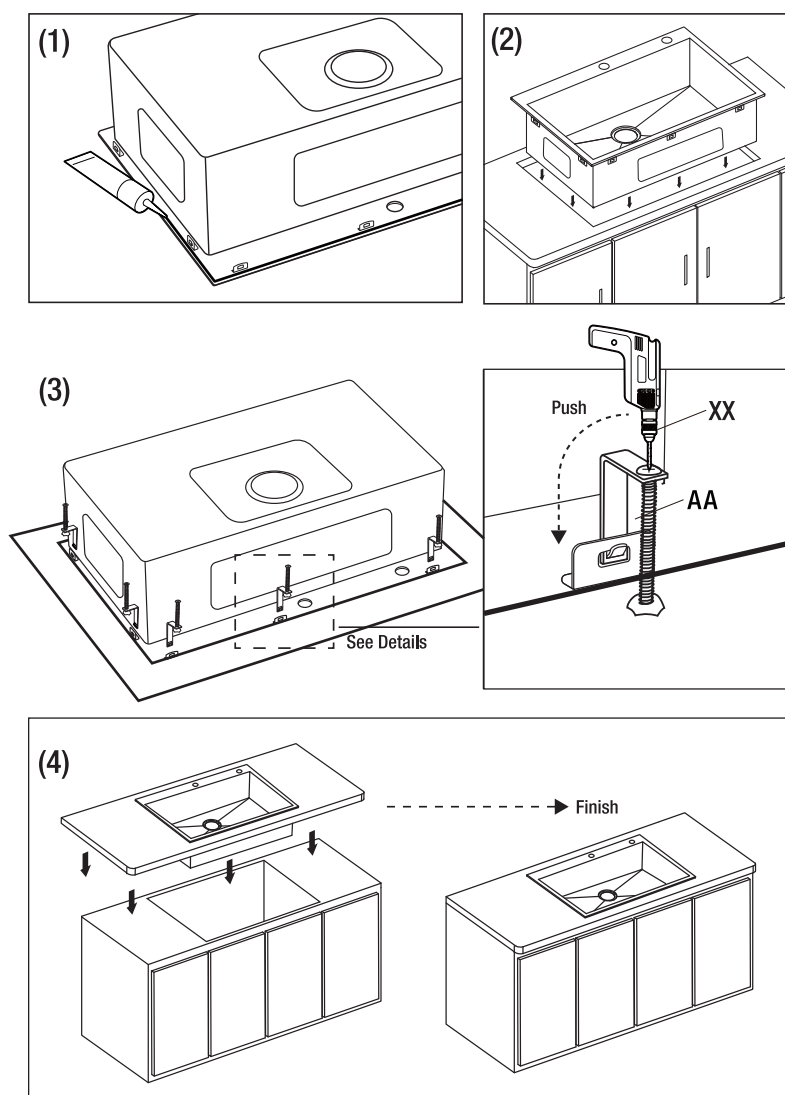

5 Putting on the grid

- When finished, place the bottom grid (K) into the sink.

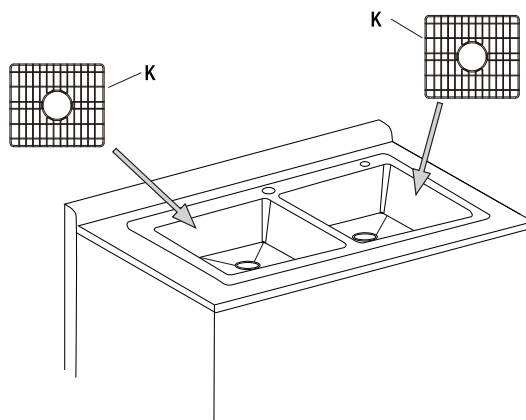

Undermount Installation




WARNING: It is strongly recommended that you use a professional installer if you choose the undermount installation.

1 Preparing the countertop



Note: Leave sufficient space around sink hole for clip installation. For undermount installation, the rear template edge should be placed at least 4 inches from wall to ensure faucet handle is unobstructed.

- Center the template (B2) on the counter so that it is parallel to the counter edge and that the installation hole will not interfere with the structure of the cabinet.
- Tape the template (B2) to the countertop to keep it in place and trace the outer edge on the template (B2) with a pencil.

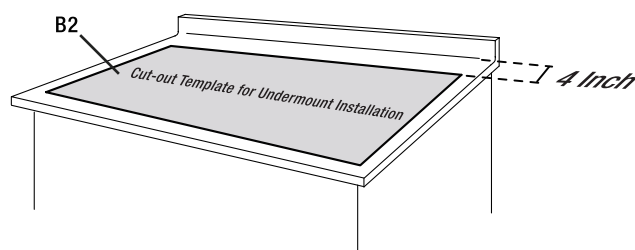

2 Cutting the installation hole

- Drill a pilot hole and cut the countertop opening. Use the appropriate cutting tool for the surface you are cutting.
- Cut the opening in the countertop by carefully following the traced line.

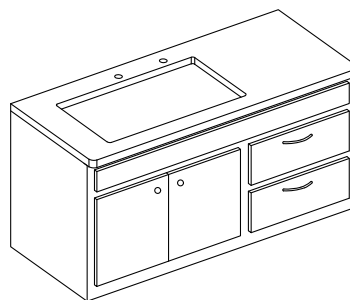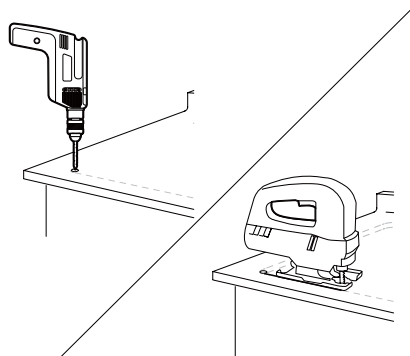



[HOMEDEPOT.COM/GLACIERBAY](https://www.homedepot.com/glacierbay)

Please contact 1-855-HD-GLACIER for further assistance.



Undermount Installation (continued)

3 Preparing the sink

- (1) Place the sink underneath the countertop cutout; and check if the cutout is fit for the sink; adjust the cutout if necessary. Place a stand under the sink to facilitate installation and avoid dropping.
- (2) Place the mounting clips as shown in the attached template and mark the centers of the clip on the countertop.

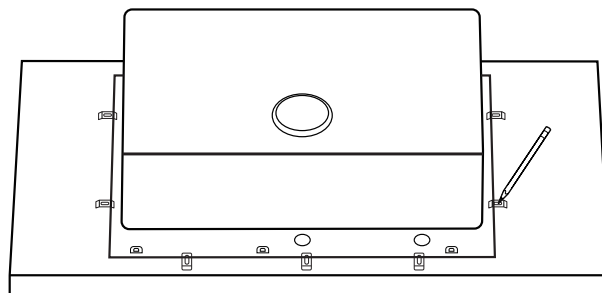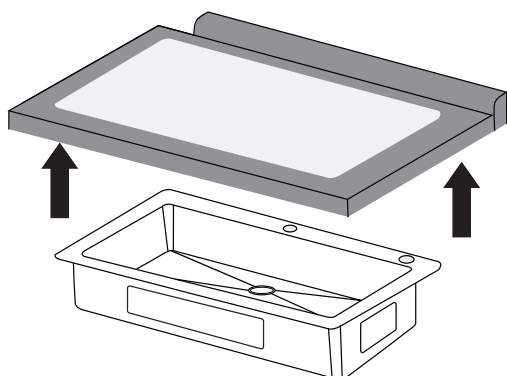

Note: Leave Greater than 4 Inch space around sink hole for the faucet handle to not be obstructed by the wall during use. Clip's screw mounting holes should be 1/2" from edge of sink.

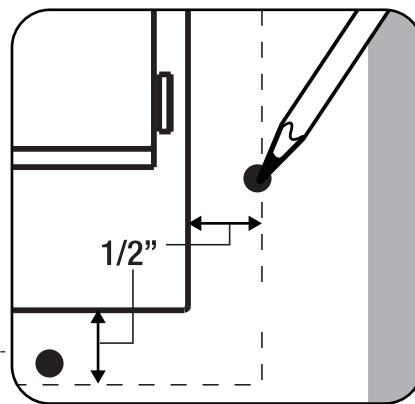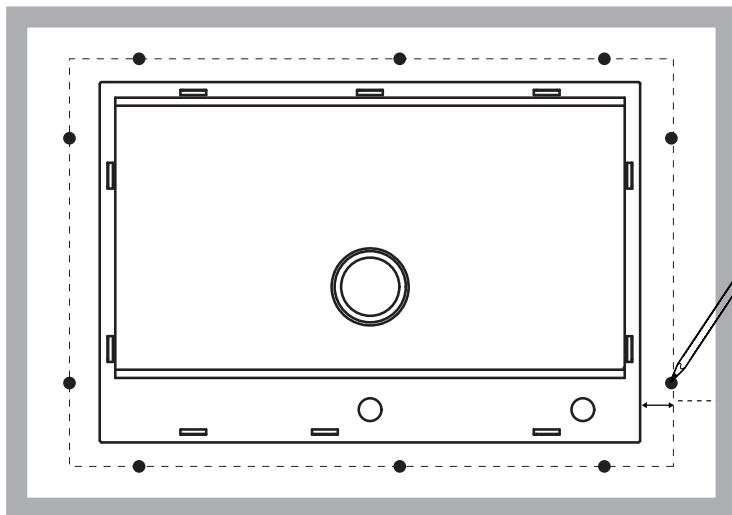


4 Installing the accessories to the sink

- Please refer to step 3 on page 9. It is easier to install the sink accessories to the sink before installing the sink to the cabinet.


Undermount Installation (continued)

5 Attaching the clips

- (1) Drill 10 mounting holes with a power drill in the clip center mark from step 3.
Drill $\frac{3}{8}$ " diameter x $\frac{1}{2}$ " deep hole in the countertop.


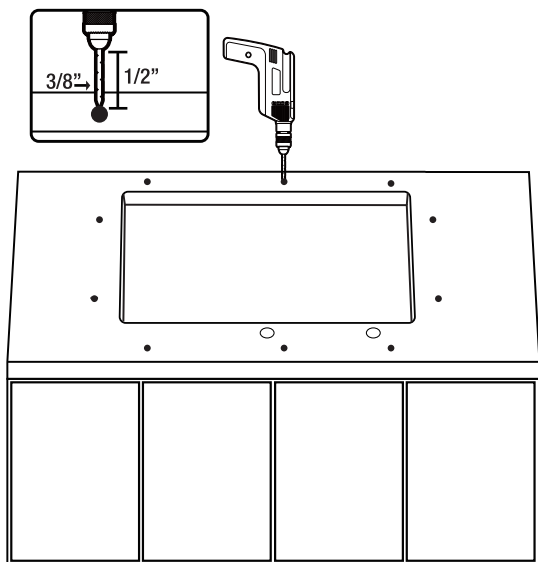


- (2) Insert the inserts (1) in the holes, so they are completely inside the hole. If necessary, gently tap the insert.

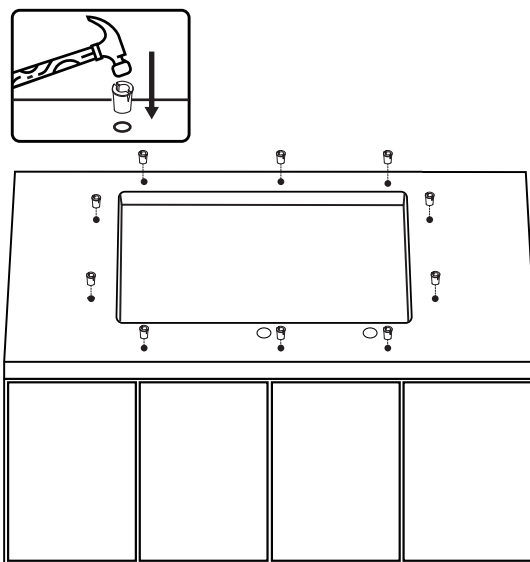



6 Installing the sink

- (1) Apply a bead of silicone around the perimeter of the top of the sink.
(2) Lower the sink into the hole and press down firmly along all the edges. Check the alignment while squeezing, so that the front of the sink (A) is parallel to the countertop. Adjust and tighten again if necessary. Do not over tighten. Clean the excess sealant with a rag.

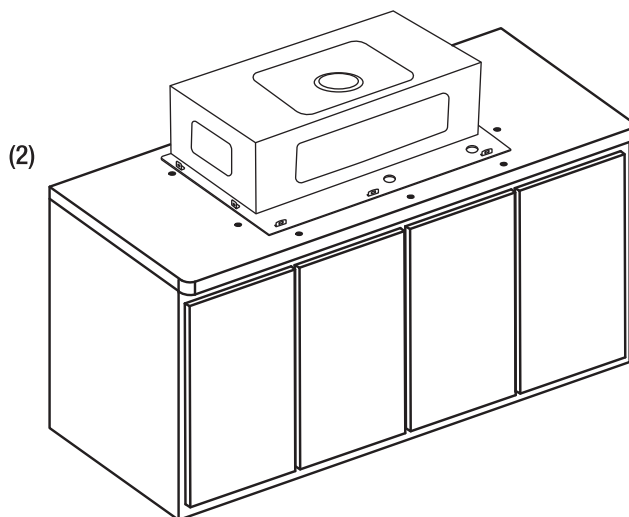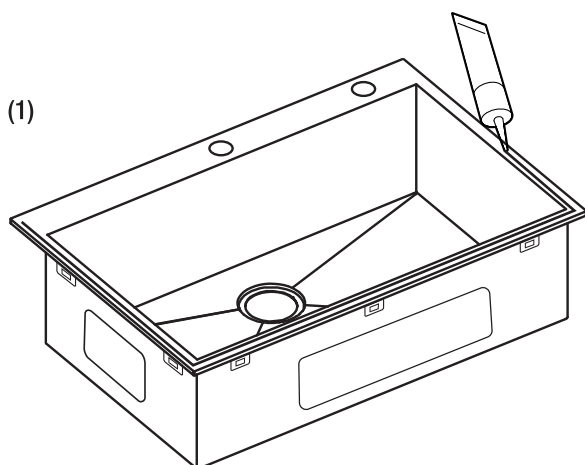


Undermount Installation (continued)

- (3) Once the sink is in the correct position, install the mounting clips. Tighten the mounting clips until the sink rim is aligned to the countertop.

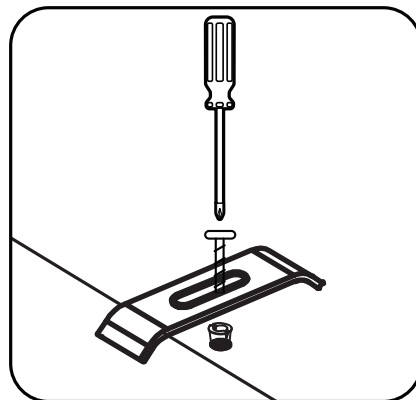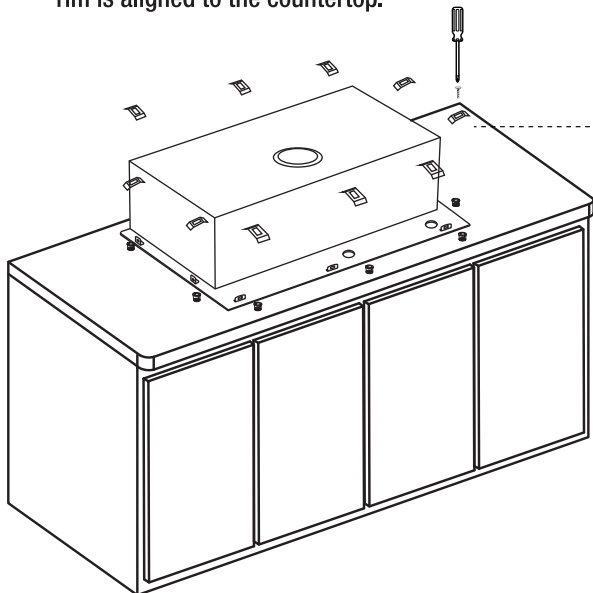

7 Installing the grid

- (1) When finished, place the bottom grid (K) into the sink.

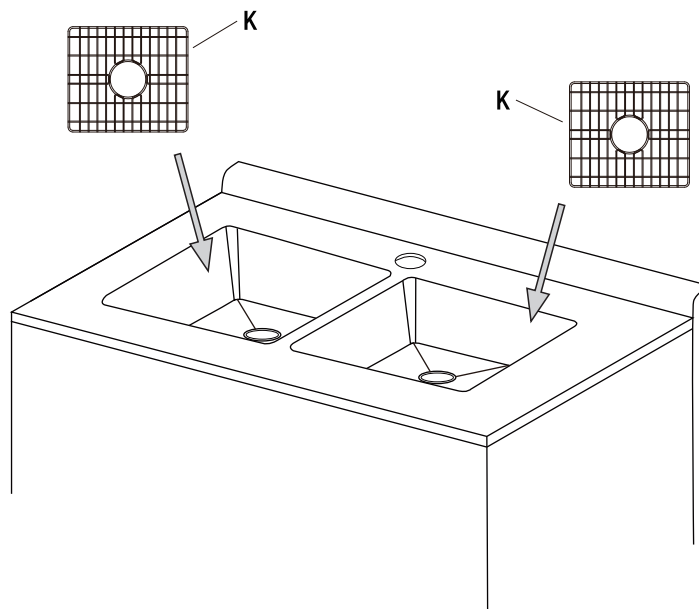



Questions, problems, missing parts? Before returning to the store,
call Glacier Bay Customer Service
8 a.m. - 7 p.m., EST, Monday-Friday, 9 a.m. - 6 p.m., EST, Saturday

1-855-HD-GLACIER

[HOMEDEPOT.COM/GLACIERBAY](https://www.homedepot.com/glacierbay)

Retain this manual for future use.