


MEASURING MODEL 190 • 290
TIP: RETURN AIR FILTER GRILLE

For Sidewall or Ceiling Applications

1 MEASURE DUCT OPENING.

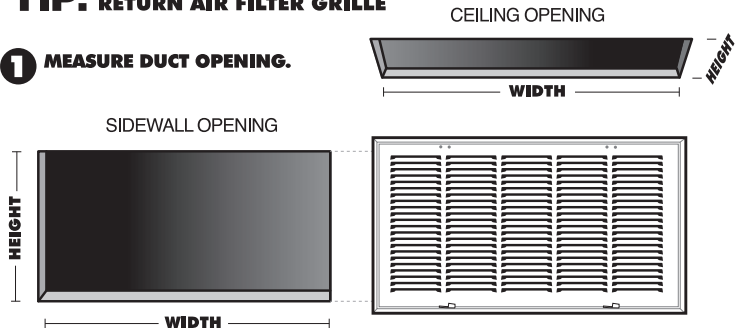


MODEL 190 • 290
RETURN AIR FILTER GRILLE
INSTALLATION INSTRUCTIONS:

STEP ONE:

First measure the duct opening on the wall or ceiling where the 190 model will be placed on. NOTE: Remember to measure the duct opening on the wall not the model itself

(Example: If the duct opening measures 24 x 12 then use Model 190 24 x 12. The outside dimension of the product always measures larger than the actual duct opening.)

2 OPEN TABS AND REMOVE GRILLE FACE

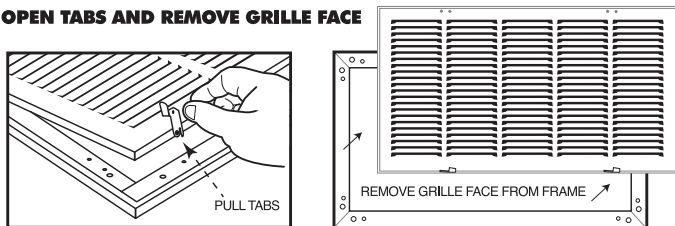


STEP TWO:

Remove face of the grille by pulling open the tabs and lifting the face from the frame.

STEP THREE:


Align grille frame over ceiling or wall opening and secure with supplied screws using a screwdriver. Insert the correct sized filter and ensure a proper fit.

3 SECURE FRAME AND INSTALL FILTER

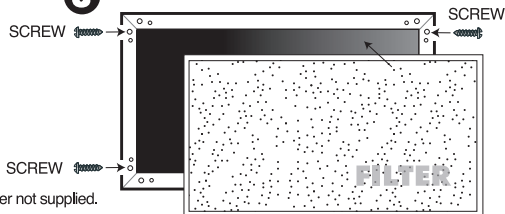

*Filter not supplied.

4 INSERT FACE AND SECURE TABS

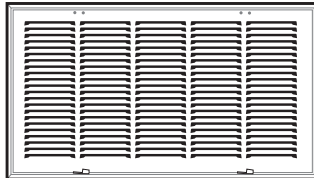

YOU'RE DONE.
GREAT JOB!

SCAN CODE FOR
VIDEOS & TIPS

