


LF-042-COBB Finish(BB) ☐

LF-042-COCC Finish(CC) ☐

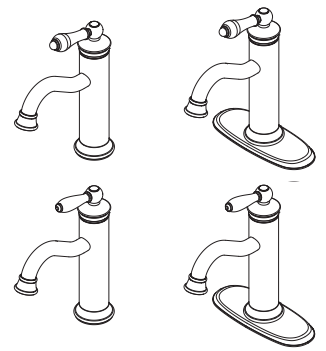

Specifications

Features

- 1.2 GPM Flow Rate
- 1 or 3-Hole Installation
- Optional Deckplate Included
- Push & Seal™ Drain Included
- TiteSeal™ Technology
- Spot Defense™ Finish Resists Spots and Fingerprints (GS Finish Only)
- Supply Lines Not Included
- Porcelain Chrome Handles (CC Finish Only)
- Pfaster Connect™
- Pforever Seal™ Ceramic Disc Valve
- Pforever Warranty®




Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF 61/9 AnnexG Certified
- EPA WaterSense Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)




Dimensions

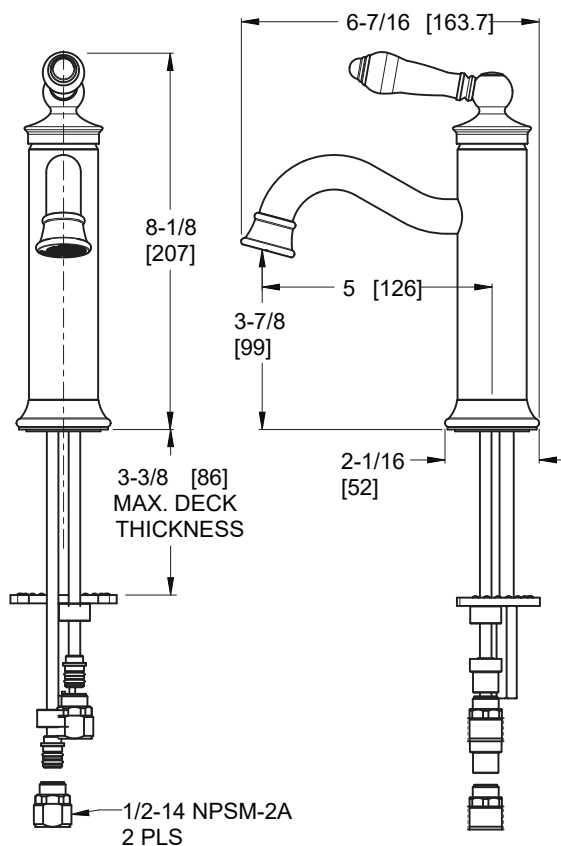


Ø1 Min to Ø1-1/2 Max. Deck Hole Openings

Handles

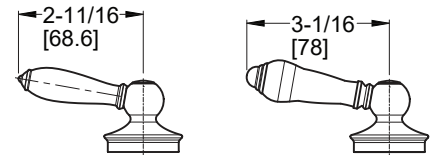

Optional Deckplate

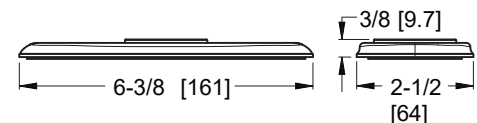

Push & Seal™ Drain

