


Hinge Adjustment Instructions

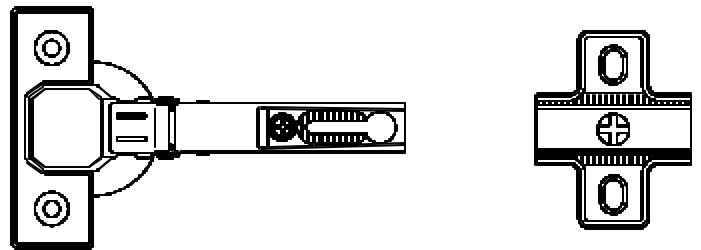

(Center Mounted Screw Design)

Please note: Before you begin, make certain that the Hinge Plate is slightly loose. Turn Screw C counter clockwise two rotations, for ease of installation

1 DOOR INSTALLATION


Carefully hold the Door and slide the Hinges on to the Hinge Plates, top and bottom. Slightly tighten "screw C" to secure Door to Cabinet Box and make all adjustments as indicated in the "DOOR ADJUSTMENT PROCEDURE".

Please note, that the Cabinet Box must be level and plumb for the Door to work properly. Under certain conditions, the wall surfaces may not be plumb, which results in a slight gap, either at the top or bottom, between the Door and Door Bumpers.

2 DOOR ADJUSTMENT PROCEDURE

Please note, only a slight adjustment is required. Rotate the Door Adjustment screws 1/8 to 1/4 turns at a time, then check the Door's position. Rotate Adjustment screws again if necessary.

Care must be taken during Hinge adjustment to avoid damage, to mating doors if supplied with your Bath Cabinet.

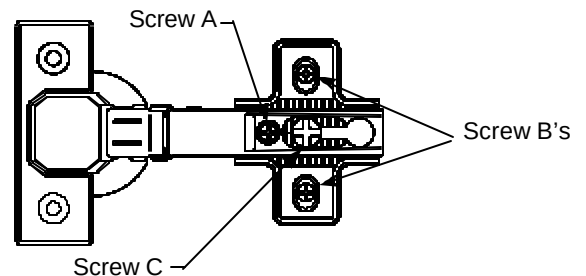


SIDE TO SIDE ADJUSTMENT : Door is adjusted side to side by turning "Screw A" clockwise or counterclockwise.


UP - DOWN ADJUSTMENT : Loosen "Screw B" on both top and bottom Hinge Plates. Raise or lower door to the desired position and re-tighten both screws.

IN - OUT ADJUSTMENT : Loosen "Screw C" on both top & bottom hinges. Move the Door in or out to desired position and re-tighten.


Please note, if door is too close to cabinet, it will not swing freely.

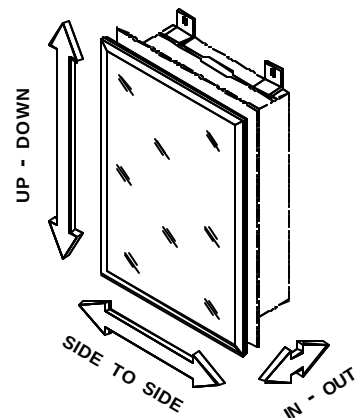


ILLUSTRATIONS OF COMPONENTS




Hinge




Hinge Plate



1/4" flat Screw



3/8" flat Screw



Hinge Plugs