Limited Warranty

J & J Global (Seller) warrants to the original Buyer only, that each product will be free from defects in material and workmanship for a period of one (1) year from date of purchase. SELLER'S SOLE OBLIGATION AND BUYER'S EXCLUSIVE REMEDY UNDER THIS LIMITED WARRANTY SHALL BE THE REPAIR OR REPLACEMENT OF PARTS, WITHOUT CHARGE, WHICH ARE DEFECTIVE IN MATERIAL OR WORKMANSHIP. ANY PARTS AS DETERMINED BY THE SELLER WHICH HAVE BEEN MISUSED; ABUSED OR DAMAGED EITHER DIRECTLY OR INDIRECTLY FROM REPAIRS OR ALTERATIONS ATTEMPTED BY UNAUTHORIZED PERSON; IMPROPER MAINTENANCE, NEGLECT OR ACCIDENT ARE NOT COVERED BY THIS LIMITED WARRANTY. This warranty does not apply to damage, heat-induced coloration changes, scratching or alteration due to normal use or weathering. To make a claim under this Limited Warranty, email contact@ezreplacement.com or visit www.ezreplace- ment.com for warranty questions and claims.

Additional Limitations

THIS LIMITED WARRANTY DOES NOT APPLY TO ACCESSORY OR CONSUMABLE ITEMS RELATED TO THIS PRODUCT. ALL IMPLIED WARRANTIES SHALL BE LIMITED IN DURATION TO ONE (1) YEAR FROM DATE OF PURCHASE. IN NO EVENT SHALL SELLER BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES, INCLUDING BUT NOT LIMITED TO LIABILITY FOR LOSS OF PROFITS, ARISING FROM THE SALE OR USE OF THIS PRODUCT. If any provision of this Limited Warranty is for any reason held to be invalid or unenforceable, such provision shall not affect any other provision herein, this Limited Warranty shall be construed as if such invalid and/or unenforceable provision had never been contained herein.

This warranty gives you special legal rights, and you may also have other rights which vary from state to state. This warranty contains the entire agreement between Seller and Buyer and supercedes any and all prior agreements, arrangements, or understandings between the parties relating to product warranty.

> Due to ongoing product development the actual product or products may vary from the illustrations or photos shown within this manual.

For Manuals, Replacement Parts or Customer Service visit: www.ezreplacement.com

 \mathbb{C}

NOTE: This product is intended for residential, non-commercial use.



Cast Bistro Set

Instruction Manual



Model No: 217005, 207004

Read the instructions and precautions before use of this product


Please keep this instruction manual for future reference


For warranty information, please refer to the back page of this instruction manual.

Made in China ©2017 J & J Global, LLC Distributed By: J & J Global, LLC Carrollton, TX 75006

	PARTS & HARDWARE LIST	
PART #	DESCRIPTION	QUANTITY
Α	Chair Back	2
В	Chair Seat	2
C	Chair Leg	8
D	Table Top	1
E	Table Leg	3
F	Table Center Brace	1
G	Stud, M8 x 30	26
Н	Bolt, M8 x 30	3
I	Washer, M8	29
J	Nut, M8	29


Carefully remove the contents from the package. If any parts are missing do not attempt to use the product until they have been obtained and correctly installed.

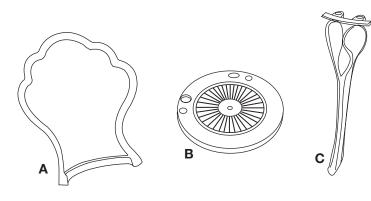

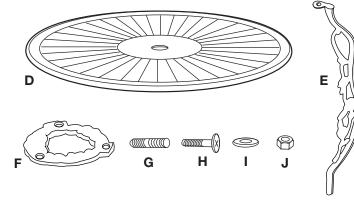

NOTE: This product is intended for residential, non-commercial use.

ASSEMBLY INSTRUCTIONS

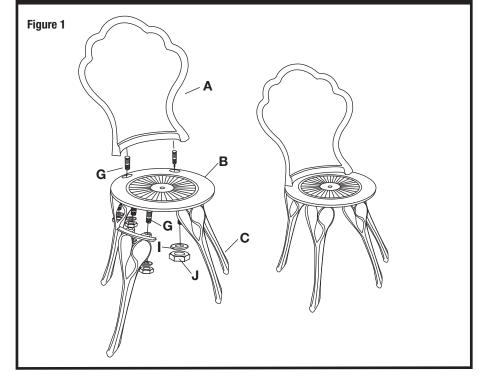

CAUTION: Do not over tighten fasteners.

- 1. (SEE FIGURE 1) Thread studs (G) into holes on bottom of chair back (A). Insert studs (G) on chair back (A) through holes on chair seat (B) top side.
- 2. With chair back (A) in place, thread studs in bottom holes of chair seat (B) next to studs of chair back. Insert chair leg (C) onto chair seat (B) studs, connecting the chair back, seat and leg.
- 3. Secure leg, seat and back with washers (I) and nuts (J).
- 4. Attach remaining legs, repeat step 2 and step 3.
- 5. Assembly second chair in same manner, repeat steps 1 4.

- 6. (SEE FIGURE 2) Position table top (D) upside down on a clean surface. Thread studs (G) into holes on bottom of table top (D).
- 7. Place the holes at top of leg (E) over threaded studs (G) on bottom of table top (D).
- 8. Secure using washers (I) nuts (J). Do not over tighten fasteners.
- 9. Attach remaining legs, repeat step 7 and step 8.
- 10. (SEE FIGURE 3) Position table right side up.
- 11. Place table center brace (F) on top of tabs on table leg (E) and align holes.
- 12. Insert bolt (H) through top of table center brace (F) and table leg tab. Secure with washer (I) and nut (J). Do over tighten fasteners.

