INSTRUCTION MANUAL ENCLOSED

ATTENTION

IF YOU HAVE ANY PROBLEMS OR QUESTIONS, EMAIL OR CALL CUSTOMER SERVICE <u>BEFORE</u> YOU RETURN THIS PRODUCT TO THE STORE WHERE IT WAS PURCHASED.

For Customer Service:

USA: Email: support@orderhelp.com /Call: 1-877-897-1222


CANADA: Email: sirio@orderhelp.com /www.sirio.ca

/Call: 1-866-666-0421


SWIVEL CHAIR

CC034&CC035&CC034-GYBU

SWIVEL CHAIR ASSEMBLY INSTRUCTION



	PARTS LIST		
Part	Description	Quantity	
	PARTS		
A	Right Armrest	1	
В	Left Armrest	1	
C	Chair Seat	1	
D	Chair Back	1	
E	Rocking Track	1	
F	Swivel Chair Base	1	
	HARDWARE		
G	Bolts M6*15mm	4	
Н	Bolts M6*35mm	14	
I	Washers A	18	
J	Washers B	4	
K	Screw Nuts	8	
L	Allen Key	1	
L	Hex Spanner	1	

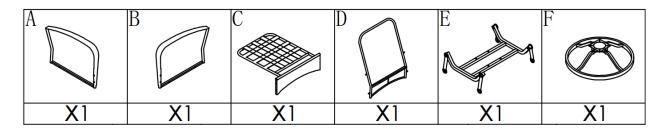

(G •	H	I	J	K	L	\mathcal{J}
	M6*15	M6*35					
	X4	X14	X18	X4	X8	X1	X1

For Customer Service:

Email: support@orderhelp.com

sirio@orderhelp.com/www.sirio.ca

Call:1-877-897-1222 / 1-866-666-0421


PLEASE READ AND FOLLOW ALL SAFETY TIPS

GETTING STARTED


- 1. Before assembly, CARESULLY use scissors or utility knife to cut and unwrap all parts. Make sure you do not discard the hardware.
- 2. Make sure that you have all the parts listed. If you are missing any parts, please email Customer Service: USA: support@orderhelp.com or call 1-877-897-1222. Canada: www@sirio.ca or call 1-866-666-0421. Please identify the parts you need and model number. Make sure to include your name and address.

***Tips: Do not fasten all bolts completely tight until finish all steps.


1. Locate the Armrests(A & B) to the Chair Back(D) by the pre-drilled threads. Fasten Bolts(G) with Washers A(I) by using Allen Key(H) to combine armrests and chair back together. 4 bolts should be fastened totally. (Step 1)




2. Locate the Chair Seat(C) to the Armrests(A & B) by the pre-drilled threads. Fasten Bolts(H) with Washers A(I) by using Allen Key(L) to combine armrests and chair seat together. 4 bolts should be fastened totally. (Step 2)




3. Locate the Chair Seat(C) to the Chair Back(D) by the pre-drilled threads. Fasten Bolts(H) with Washers A(I) by using Allen Key(L) to combine chair seat and chair back together. 2 bolts should be fastened totally. (Step 3).

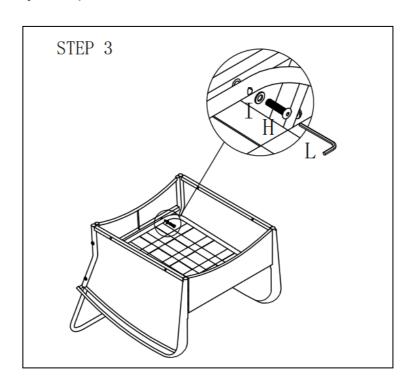

4. Locate the Rocking Track(E) to the Armrests' bottom(A & B) by the pre-drilled threads. Fasten Bolts(H) into Screw Nuts(K) by using Allen Key(L) and Hex Spanner(M) to combine rocking rack and the chair main part together. 4 bolts should be fastened totally. (Step 4).

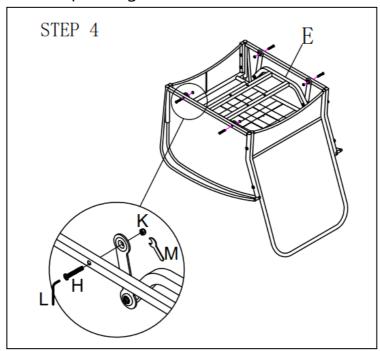

5. Locate the Rocking Track(F) to the Rocking Rack(E) by the pre-drilled threads. Fasten Bolts(H) with Washers A(I) and Washers B(J) into Screw Nuts(K) by using Allen Key(L) and Hex Spanner(M). 4 bolts should be fastened totally. 8 Washers A and 4 Washers B are needed for this step (Step 5).

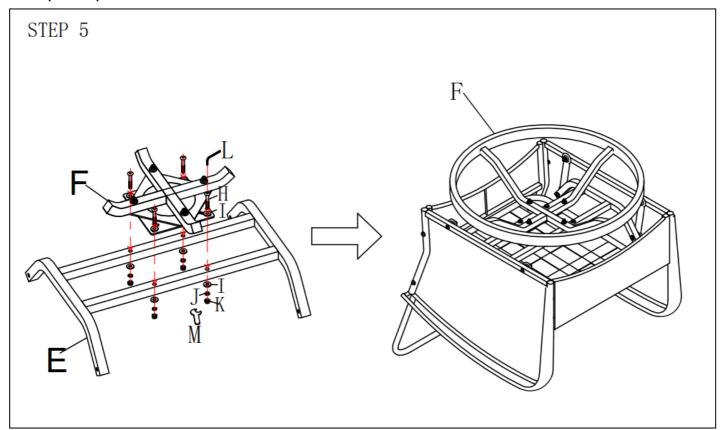

6. Fasten all bolts tight.

Till now you have finished the whole assembly and enjoy your chair!!